



## SMA Male to MCX Plug Right Angle Cable 150 CM Length Using PE-SR405FLJ Coax , LF Solder

### RF Cable Assemblies Technical Data Sheet


PE3C2679LF-150CM

#### Configuration

- Connector 1: SMA Male
- Connector 2: MCX Plug Right Angle
- Cable Type: PE-SR405FLJ

#### Features

- Max Frequency 6 GHz
- Shielding Effectivity > 100 dB
- 69.5% Phase Velocity
- FEP Jacket
- 500 Mating Cycles

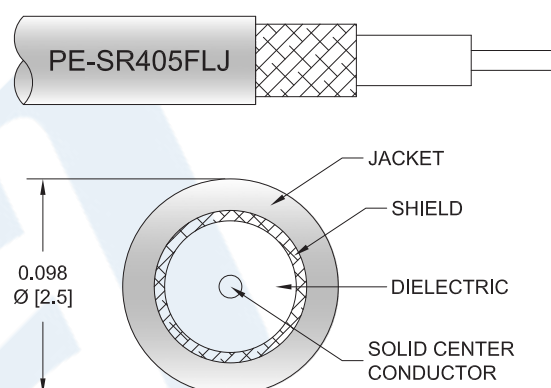

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3C2679LF-150CM SMA male to MCX plug right angle 150 cm cable using PE-SR405FLJ coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack SMA to MCX cable assembly has a male to plug gender configuration with 50 ohm formable PE-SR405FLJ coax. The PE3C2679LF-150CM SMA male to MCX plug cable assembly operates to 6 GHz. The right angle MCX interface on the PE-SR405FLJ cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.4:1	
Velocity of Propagation		69.5		%
RF Shielding	100			dB
Group Delay		1.43 [4.69]		ns/ft [ns/m]
Capacitance		29 [95.14]		pF/ft [pF/m]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to MCX Plug Right Angle Cable 150 CM Length Using PE-SR405FLJ Coax , LF Solder PE3C2679LF-150CM](#)



SMA Male to MCX Plug Right Angle Cable 150 CM  
Length Using PE-SR405FLJ Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3C2679LF-150CM

**Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2	4	6	GHz
Insertion Loss (Max.)	1.037	1.406	1.805	2.602	3.256	dB

**Electrical Specification Notes:**

The Insertion Loss data above is data based on the performance specifications of the coax used in this assembly. The Insertion Loss includes as estimated insertion loss of 0.3dB of connector loss.

**Mechanical Specifications**

**Cable Assembly**

Length*	59.06 in [150.01 cm]
Diameter	0.312 in [7.92 mm]

**Cable**

Cable Type	PE-SR405FLJ
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Tinned Copper Braid
Jacket Material	FEP, Black
Jacket Diameter	0.098 in [2.49 mm]
One Time Minimum Bend Radius	0.236 in [5.99 mm]
Repeated Minimum Bend Radius	0.787 in [19.99 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to MCX Plug Right Angle Cable 150 CM Length Using PE-SR405FLJ Coax , LF Solder PE3C2679LF-150CM](#)



SMA Male to MCX Plug Right Angle Cable 150 CM  
Length Using PE-SR405FLJ Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3C2679LF-150CM

**Connectors**

Description	Connector 1	Connector 2
Type	SMA Male	MCX Plug Right Angle
Specification		MIL-C-39012
Impedance	50 Ohms	50 Ohms
Mating Cycles	500	500
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50μ in. minimum, MIL-G-45204	30μ in minimum
Dielectric Type	PTFE	Teflon
Body Material and Plating	Stainless Steel, Gold	Brass, Gold
Body Plating Specification	MIL-G-45204	10μ in minimum
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	QQ-N-290	
Hex Size	5/16 in.	
Torque	5 in-lbs [0.57 Nm]	

Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8"$ , whichever is greater.

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to MCX Plug Right Angle Cable 150 CM Length Using PE-SR405FLJ Coax , LF Solder PE3C2679LF-150CM](#)




SMA Male to MCX Plug Right Angle Cable 150 CM  
Length Using PE-SR405FLJ Coax , LF Solder

## RF Cable Assemblies Technical Data Sheet

PE3C2679LF-150CM

### Typical Performance Data

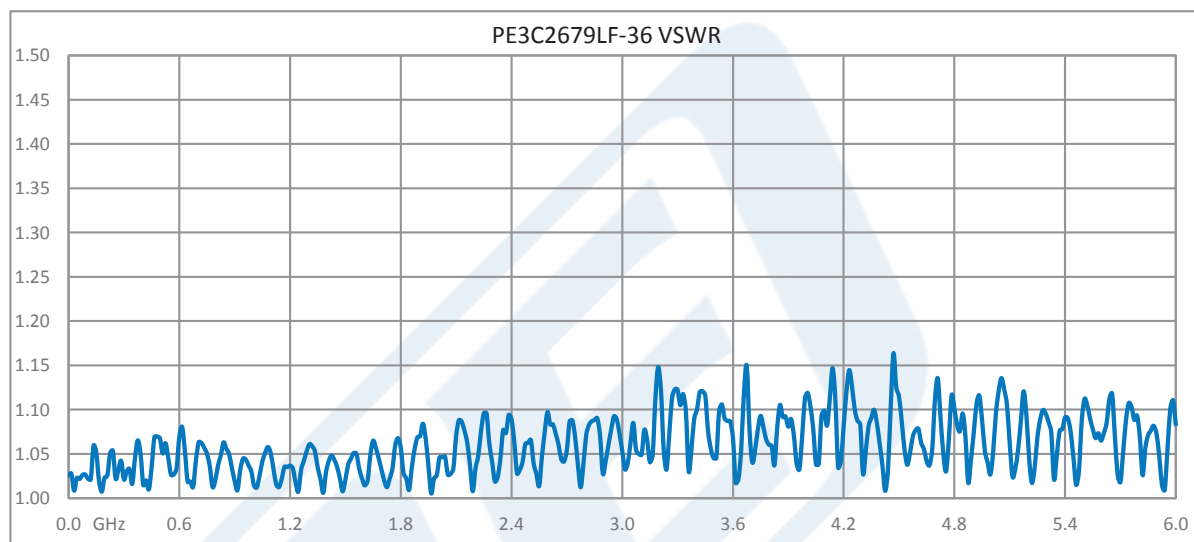

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to MCX Plug Right Angle Cable 150 CM Length Using PE-SR405FLJ Coax , LF Solder PE3C2679LF-150CM](#)



SMA Male to MCX Plug Right Angle Cable 150 CM  
Length Using PE-SR405FLJ Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3C2679LF-150CM

**How to Order**

Part Number Configuration:

**PE3C2679LF**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C2679LF-12 = 12 inches long cable  
PE3C2679LF-100cm = 100 cm long cable


SMA Male to MCX Plug Right Angle Cable 150 CM Length Using PE-SR405FLJ Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to MCX Plug Right Angle Cable 150 CM Length Using PE-SR405FLJ Coax , LF Solder PE3C2679LF-150CM](#)

URL: <https://www.pasternack.com/sma-male-mcx-plug-pe-sr405flj-cable-assembly-pe3c2679lf-150cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

**PE3C2679LF-150CM CAD Drawing**  
SMA Male to MCX Plug Right Angle Cable 150 CM Length  
Using PE-SR405FLJ Coax , LF Solder

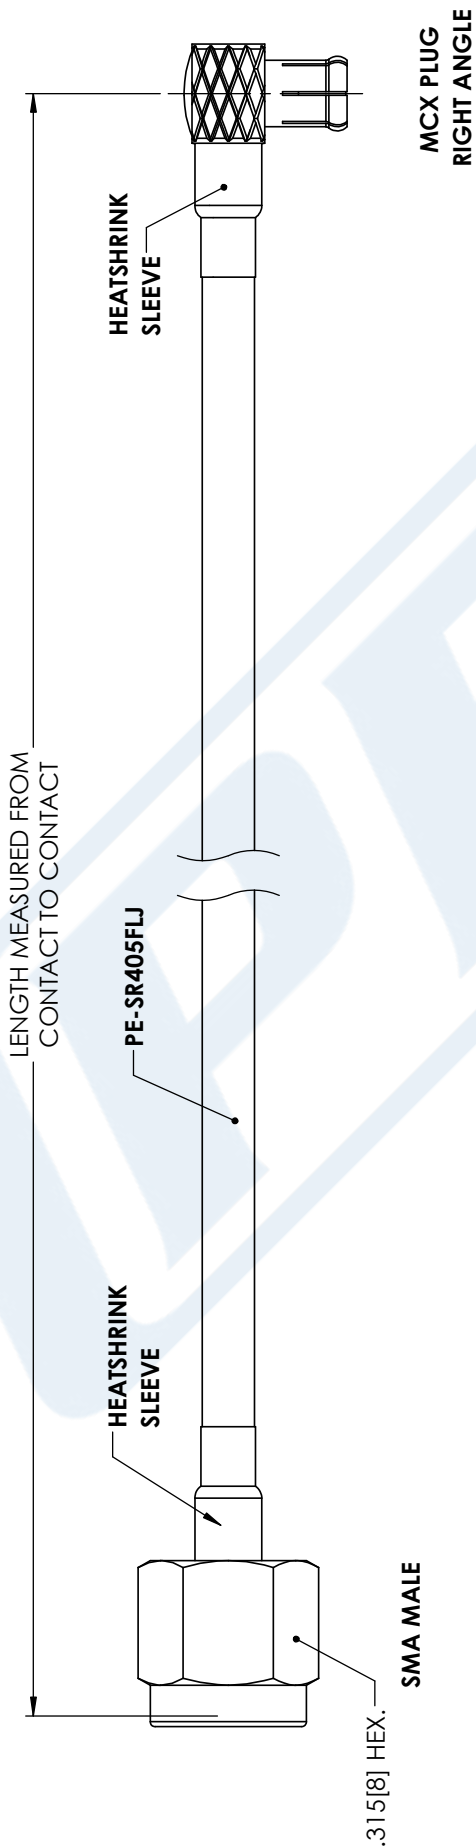

**STANDARD TOLERANCES**

.X ±0.2  
.XX ±0.01  
.XXX ±0.005

\*STANDARD TOLERANCES APPLY  
ONLY TO DIMENSIONS IN INCHES



Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
**Phone:** (949) 261-1920 | **Fax:** (949) 261-7451  
**Website:** [www.pasternack.com](http://www.pasternack.com) | **E-Mail:** [sales@pasternack.com](mailto:sales@pasternack.com)

**DWG TITLE**

PE3C2679LF

**NOTES:**  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

**CAGE CODE 53919**

**CAD FILE** 10/15/18

**SCALE** N/A

**SIZE** A

CN2245