



## BNC Male to Straight Cut Lead Cable 59.06 Inch Length Using RG188 Coax

### RF Cable Assemblies Technical Data Sheet

PE3C3583-150CM

#### Configuration

- Connector 1: BNC Male
- Connector 2: Straight Cut Lead
- Cable Type: RG188

#### Features

- PTFE Jacket

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3C3583-150CM 50 ohm BNC male to straight cut lead 59.06 inch cable using RG188 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Mechanical Specifications

##### Cable Assembly

Length\* 59.06 in [150.01 cm]

##### Cable

Cable Type	RG188
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Plated Copper Braid
Jacket Material	PTFE, White
Jacket Diameter	0.11 in [2.79 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to Straight Cut Lead Cable 59.06 Inch Length Using RG188 Coax PE3C3583-150CM](#)



## BNC Male to Straight Cut Lead Cable 59.06 Inch Length Using RG188 Coax

### RF Cable Assemblies Technical Data Sheet

PE3C3583-150CM

#### Connectors

Description	Connector 1	Connector 2
Type	BNC Male	Straight Cut Lead
Specification	MIL-STD-348A	
Impedance	50 Ohms	0 Ohms
Contact Material and Plating	Brass, Gold	
Contact Plating Specification	50µ in. minimum	
Dielectric Type	Teflon	
Body Material and Plating	Brass, Nickel	
Body Plating Specification	100µ in. minimum	
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100µ in. minimum	

#### Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8"$ , whichever is greater.

#### Environmental Specifications

##### Temperature

Operating Range -55 to +165 deg C

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to Straight Cut Lead Cable 59.06 Inch Length Using RG188 Coax PE3C3583-150CM](#)



**BNC Male to Straight Cut Lead Cable**  
59.06 Inch Length Using RG188 Coax

**RF Cable Assemblies Technical Data Sheet**

**PE3C3583-150CM**

**How to Order**

Part Number Configuration:

**PE3C3583**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C3583-12 = 12 inches long cable  
PE3C3583-100cm = 100 cm long cable

BNC Male to Straight Cut Lead Cable 59.06 Inch Length Using RG188 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to Straight Cut Lead Cable 59.06 Inch Length Using RG188 Coax PE3C3583-150CM](https://www.pasternack.com/bnc-male-straight-cut-sexless-rg188au-cable-assembly-pe3c3583-150cm-p.aspx)

URL: <https://www.pasternack.com/bnc-male-straight-cut-sexless-rg188au-cable-assembly-pe3c3583-150cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3C3583-150CM CAD Drawing

BNC Male to Straight Cut Lead Cable 59.06 Inch Length Using RG188 Coax

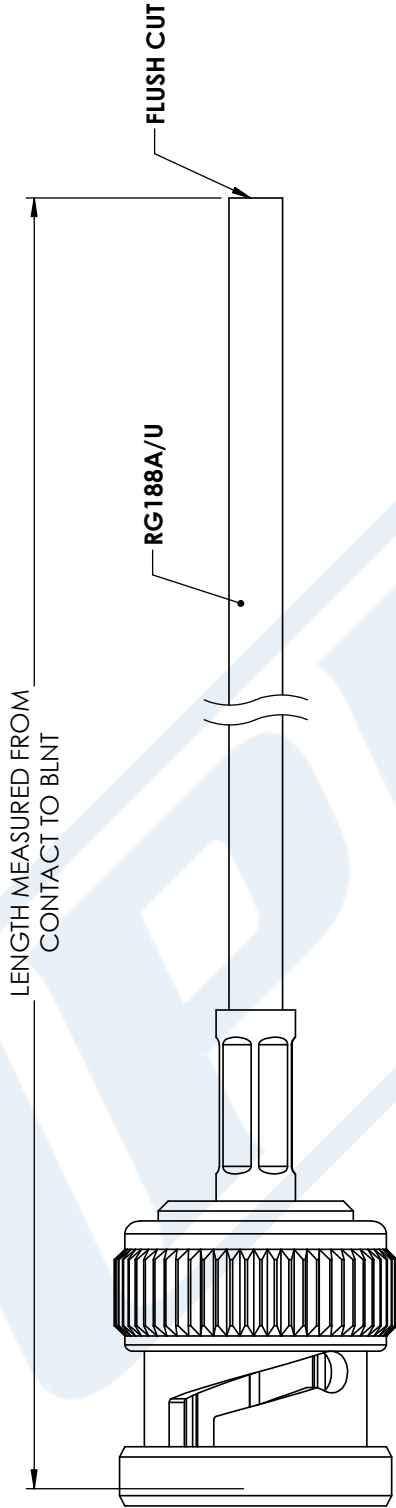

BNC MALE

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.01
.XXX	±0.005

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES



Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
**Phone:** (949) 261-1920 | **Fax:** (949) 261-7451  
**Website:** www.pasternack.com | **E-Mail:** sales@pasternack.com

DWG TITLE  
 PE3C3583

CAGE CODE 53919

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].

CAD FILE 09/19/18

SCALE N/A

SIZE A

CN2245