



N Male to N Male Right Angle Cable 24 Inch Length Using LMR-400-UF Coax

RF Cable Assemblies Technical Data Sheet


PE3C3643-24

Configuration

- Connector 1: N Male
- Connector 2: N Male Right Angle
- Cable Type: LMR-400-UF

Features

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 85% Phase Velocity
- Double Shielded
- TPE Jacket

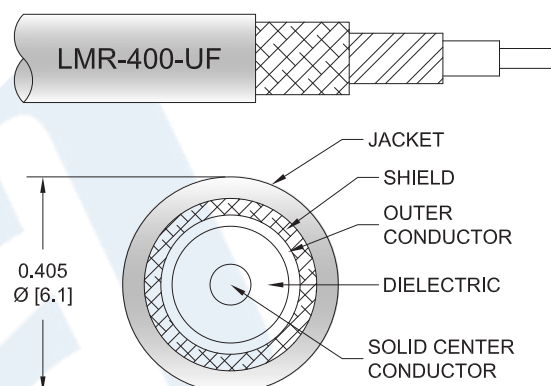

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C3643-24 type N male to type N male right angle 24 inch cable using LMR-400-UF coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to type N cable assembly has a male to male gender configuration with 50 ohm flexible LMR-400-UF coax. The PE3C3643-24 type N male to type N male cable assembly operates to 5.8 GHz. The right angle type N interface on the LMR-400-UF cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Right Angle Cable 24 Inch Length Using LMR-400-UF Coax PE3C3643-24](#)



N Male to N Male Right Angle Cable 24 Inch Length Using LMR-400-UF Coax

RF Cable Assemblies Technical Data Sheet

PE3C3643-24

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------------|---------|--------------|---------|-----------------|
| Frequency Range | DC | | 5.8 | GHz |
| VSWR | | | 1.4:1 | |
| Velocity of Propagation | | 85 | | % |
| RF Shielding | 90 | | | dB |
| Group Delay | | 1.2 [3.94] | | ns/ft [ns/m] |
| Capacitance | | 23.9 [78.41] | | pF/ft [pF/m] |
| Inductance | | 0.06 [0.2] | | uH/ft [uH/m] |
| DC Resistance Inner Conductor | | 1.07 [3.51] | | Ω/1000ft [Ω/Km] |
| DC Resistance Outer Conductor | | 1.65 [5.41] | | Ω/1000ft [Ω/Km] |
| Jacket Spark | | | 8,000 | Vrms |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|------|-----|------|------|------|-------|
| Frequency | 0.5 | 1 | 2 | 4 | 5.8 | GHz |
| Insertion Loss (Max.) | 0.37 | 0.4 | 0.44 | 0.51 | 0.56 | dB |

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.3dB of connector loss.

Mechanical Specifications

Cable Assembly

| | |
|----------|-------------------|
| Length* | 24 in [609.6 mm] |
| Diameter | 0.8 in [20.32 mm] |

Cable

| | |
|--------------------------------------|---------------------|
| Cable Type | LMR-400-UF |
| Impedance | 50 Ohms |
| Inner Conductor Type | Stranded |
| Inner Conductor Material and Plating | Copper |
| Dielectric Type | PE (F) |
| Number of Shields | 2 |
| Shield Layer 1 | Aluminum Tape |
| Shield Layer 2 | Tinned Copper Braid |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Right Angle Cable 24 Inch Length Using LMR-400-UF Coax PE3C3643-24](#)



N Male to N Male Right Angle Cable 24 Inch Length Using LMR-400-UF Coax

RF Cable Assemblies Technical Data Sheet

PE3C3643-24

| | |
|------------------------------|------------------------|
| Jacket Material | TPE, Black |
| Jacket Diameter | 0.405 in [10.29 mm] |
| One Time Minimum Bend Radius | 1 in [25.4 mm] |
| Repeated Minimum Bend Radius | 4 in [101.6 mm] |
| Bending Moment | 0.38 lbs-ft [0.52 N-m] |
| Flat Plate Crush | 20 lbs/in [0.36 Kg/mm] |
| Tensile Strength | 160 lbs [72.57 Kg] |

Connectors

| Description | Connector 1 | Connector 2 |
|------------------------------------|-------------------|---------------------|
| Type | N Male | N Male Right Angle |
| Impedance | 50 Ohms | 50 Ohms |
| Mating Cycles | | 500 |
| Contact Material and Plating | Brass, Gold | Brass, Gold |
| Contact Plating Specification | 50 µ in. minimum | |
| Dielectric Type | PTFE | Teflon |
| Body Material and Plating | Brass, Tri-Metal | Brass, Tri-Metal |
| Body Plating Specification | 150 µ in. minimum | |
| Coupling Nut Material and Plating | Brass, Tri-Metal | Brass, Tri-Metal |
| Coupling Nut Plating Specification | 150 µ in. minimum | |
| Hex Size | 13/16 inch | 13/16 inch |
| Torque | | 30 in-lbs [3.39 Nm] |

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8$ ", whichever is greater.

Environmental Specifications

Temperature

Operating Range -40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Right Angle Cable 24 Inch Length Using LMR-400-UF Coax PE3C3643-24](#)




N Male to N Male Right Angle Cable 24 Inch
Length Using LMR-400-UF Coax

RF Cable Assemblies Technical Data Sheet

PE3C3643-24

Typical Performance Data

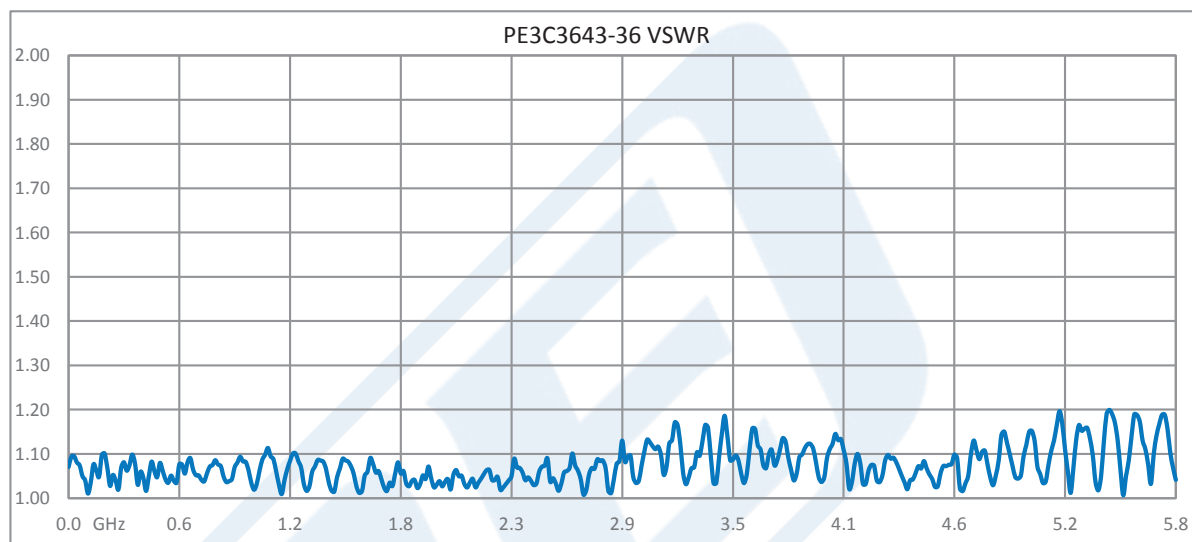

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Right Angle Cable 24 Inch Length Using LMR-400-UF Coax PE3C3643-24](#)



N Male to N Male Right Angle Cable 24 Inch Length Using LMR-400-UF Coax

RF Cable Assemblies Technical Data Sheet

PE3C3643-24

How to Order

Part Number Configuration:

PE3C3643

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C3643-12 = 12 inches long cable
PE3C3643-100cm = 100 cm long cable

N Male to N Male Right Angle Cable 24 Inch Length Using LMR-400-UF Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Right Angle Cable 24 Inch Length Using LMR-400-UF Coax PE3C3643-24](https://www.pasternack.com/n-male-n-male-lmr400uf-cable-assembly-pe3c3643-24-p.aspx)

URL: <https://www.pasternack.com/n-male-n-male-lmr400uf-cable-assembly-pe3c3643-24-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C3643-24 CAD Drawing

N Male to N Male Right Angle Cable 24 Inch Length Using LMR-400-UF Coax

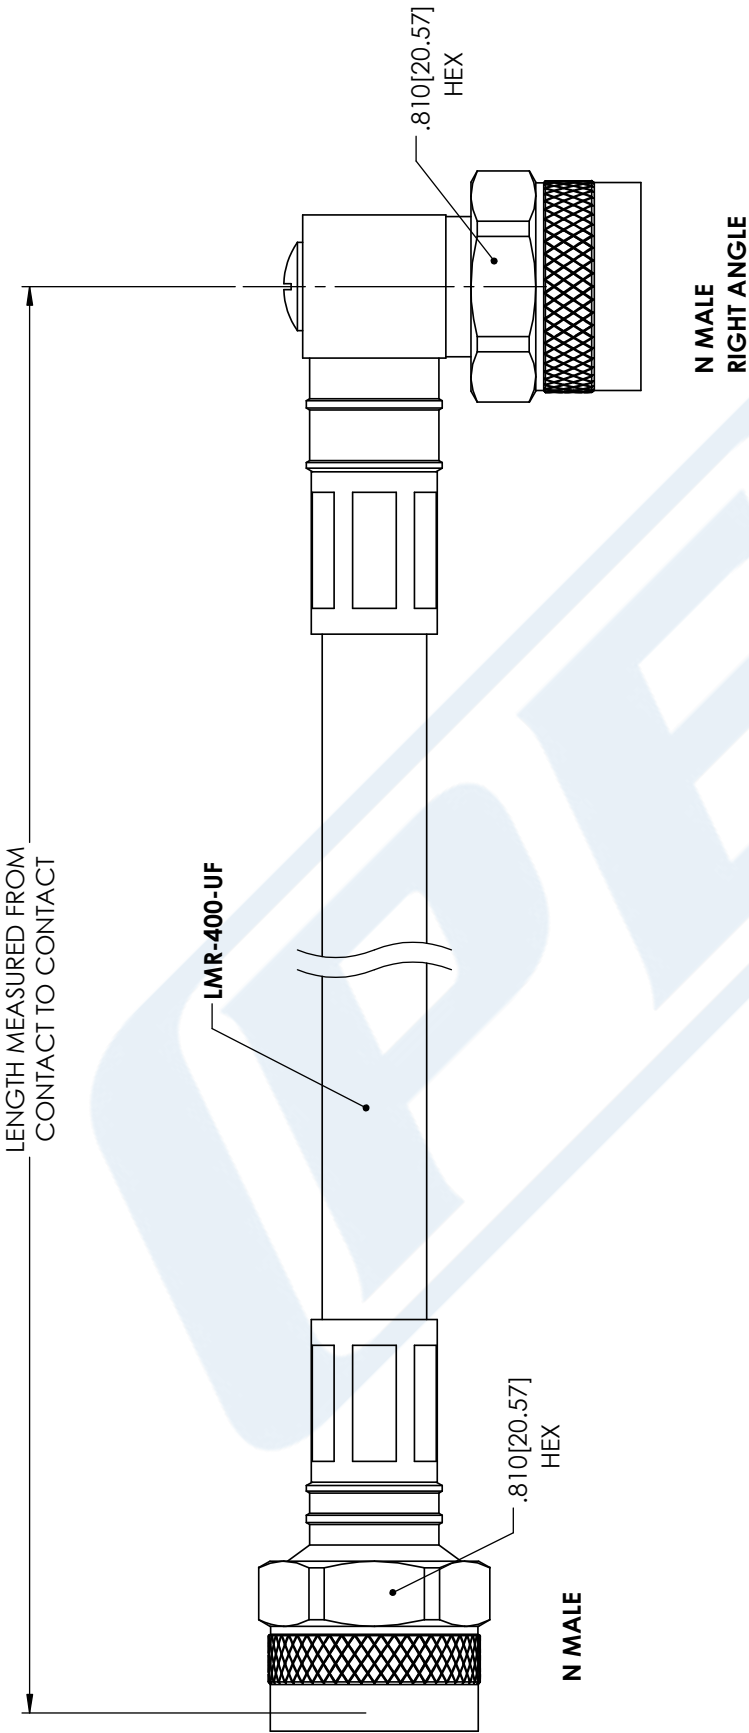

STANDARD TOLERANCES

.X ±0.2
.XX ±0.01
.XXX ±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES



Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE3C3643

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

CN2245

SIZE A

SCALE N/A

CAD FILE 09/28/18

CAGE CODE 53919