



## SSMB Plug Right Angle to SSMB Plug Right Angle Cable 12 Inch Length Using RG178 Coax

### RF Cable Assemblies Technical Data Sheet

PE3C4801-12

#### Configuration

- Connector 1: SSMB Plug Right Angle
- Connector 2: SSMB Plug Right Angle
- Cable Type: RG178

#### Features

- Max Frequency 3 GHz
- 70% Phase Velocity
- FEP Jacket

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3C4801-12 SSMB plug right angle to SSMB plug right angle 12 inch cable using RG178 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SSMB to SSMB cable assembly has a plug to plug gender configuration with 50 ohm flexible RG178 coax. The PE3C4801-12 SSMB plug to SSMB plug cable assembly operates to 3 GHz. The right angle SSMB interfaces on the RG178 cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.5:1	
Velocity of Propagation		70		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	3	GHz
Insertion Loss (Max.)	0.61	0.71	0.84	1.1	1.18	dB

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMB Plug Right Angle to SSMB Plug Right Angle Cable 12 Inch Length Using RG178 Coax PE3C4801-12](#)



## SSMB Plug Right Angle to SSMB Plug Right Angle Cable 12 Inch Length Using RG178 Coax

### RF Cable Assemblies Technical Data Sheet

PE3C4801-12

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.4dB of connector loss.

#### Mechanical Specifications

##### Cable Assembly

Length*	12 in [304.8 mm]
Diameter	0.33 in [8.38 mm]

##### Cable

Cable Type	RG178
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.072 in [1.83 mm]
Repeated Minimum Bend Radius	0.4 in [10.16 mm]

##### Connectors

Description	Connector 1	Connector 2
Type	SSMB Plug Right Angle	SSMB Plug Right Angle
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Contact Plating Specification	MIL-G-45204	MIL-G-45204
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Gold	Brass, Gold
Body Plating Specification	MIL-G-45204	MIL-G-45204
Coupling Nut Material and Plating	Brass, Gold	Brass, Gold
Coupling Nut Plating Specification	MIL-G-45204	MIL-G-45204

#### Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8"$ , whichever is greater.

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMB Plug Right Angle to SSMB Plug Right Angle Cable 12 Inch Length Using RG178 Coax PE3C4801-12](#)




SSMB Plug Right Angle to SSMB Plug Right Angle  
Cable 12 Inch Length Using RG178 Coax

RF Cable Assemblies Technical Data Sheet

PE3C4801-12

Typical Performance Data

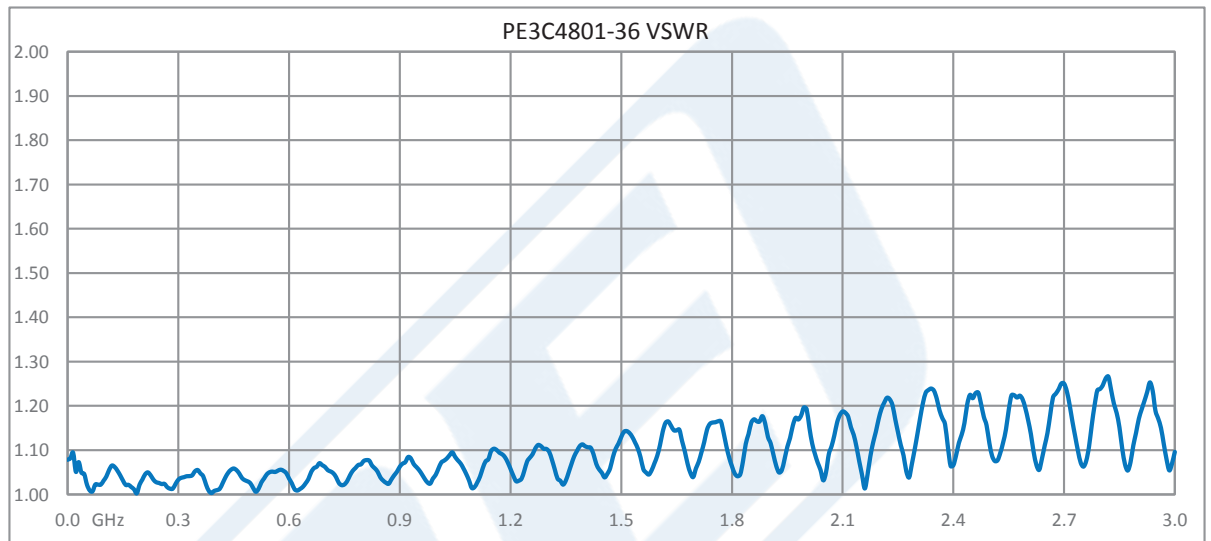

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMB Plug Right Angle to SSMB Plug Right Angle Cable 12 Inch Length Using RG178 Coax PE3C4801-12](#)



SSMB Plug Right Angle to SSMB Plug Right Angle  
Cable 12 Inch Length Using RG178 Coax

RF Cable Assemblies Technical Data Sheet

PE3C4801-12

**How to Order**

Part Number Configuration:

**PE3C4801**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C4801-12 = 12 inches long cable  
PE3C4801-100cm = 100 cm long cable


SSMB Plug Right Angle to SSMB Plug Right Angle Cable 12 Inch Length Using RG178 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMB Plug Right Angle to SSMB Plug Right Angle Cable 12 Inch Length Using RG178 Coax PE3C4801-12](https://www.pasternack.com/ssmb-plug-ssmb-plug-rg178bu-cable-assembly-pe3c4801-12-p.aspx)

URL: <https://www.pasternack.com/ssmb-plug-ssmb-plug-rg178bu-cable-assembly-pe3c4801-12-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

**PE3C4801-12 CAD Drawing**  
 SSMB Plug Right Angle to SSMB Plug Right Angle  
 Cable 12 Inch Length Using RG178 Coax

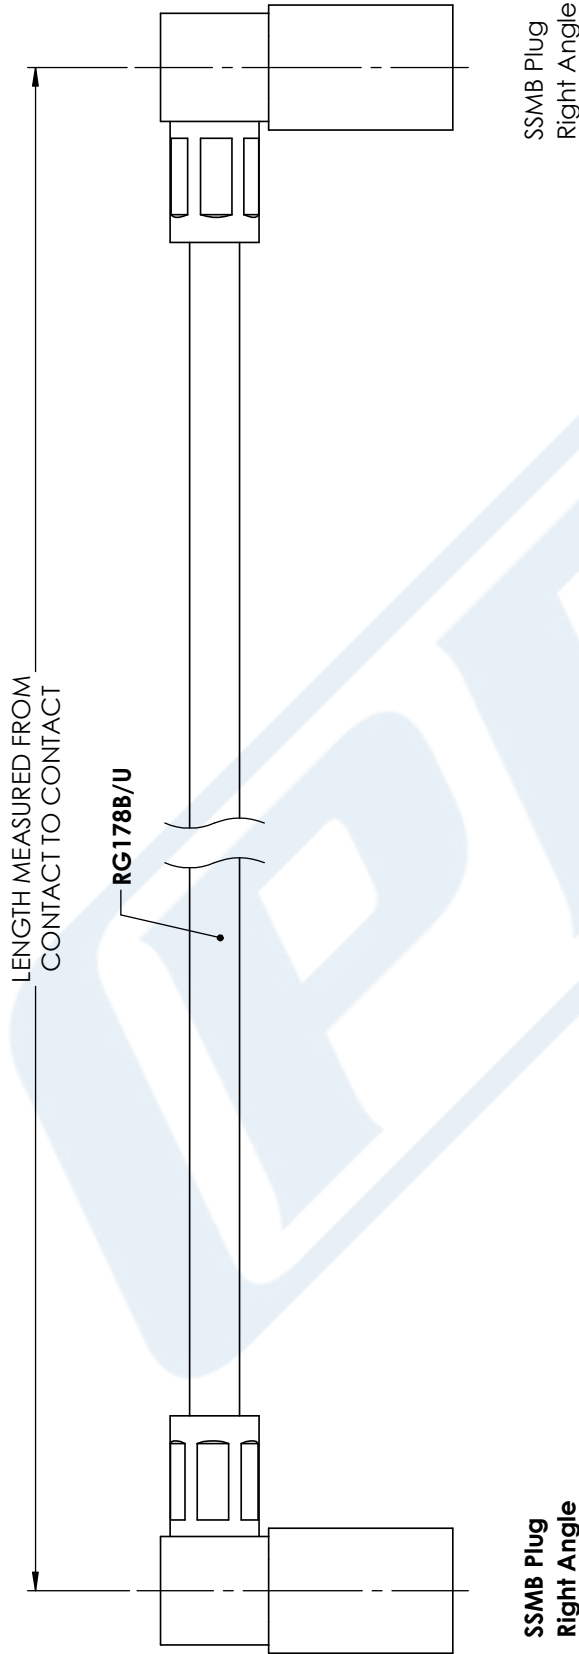

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.01
.XXX	±0.005

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES



Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
**Phone:** (949) 261-1920 | **Fax:** (949) 261-7451  
**Website:** www.pasternack.com | **E-Mail:** sales@pasternack.com

DWG TITLE  
 PE3C4801

CAGE CODE 53919

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].

CAD FILE 10/16/18

SCALE N/A

SIZE A

CN2245