



BNC Male to MCX Jack Bulkhead Low Loss Cable 24 Inch Length Using LMR-100 Coax

RF Cable Assemblies Technical Data Sheet


PE3C6788-24

Configuration

- Connector 1: BNC Male
- Connector 2: MCX Jack Bulkhead
- Cable Type: LMR-100A

Features

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 66% Phase Velocity
- Double Shielded
- PVC Jacket

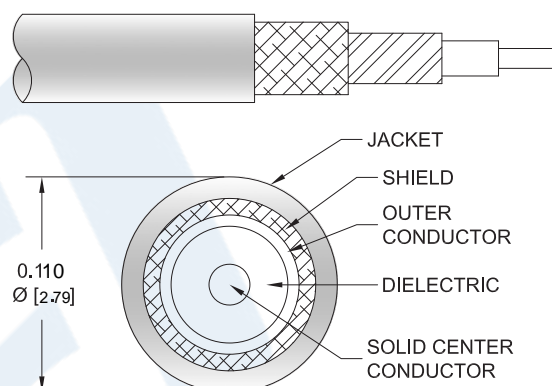

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C6788-24 BNC male to MCX jack bulkhead 24 inch cable using LMR-100 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack BNC to MCX cable assembly has a male to jack gender configuration with 50 ohm flexible LMR-100A coax. The PE3C6788-24 BNC male to MCX jack cable assembly operates to 5.8 GHz. Our RF cable assembly with MCX bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to MCX Jack Bulkhead Low Loss Cable 24 Inch Length Using LMR-100 Coax PE3C6788-24](#)



BNC Male to MCX Jack Bulkhead Low Loss Cable 24 Inch Length Using LMR-100 Coax

RF Cable Assemblies Technical Data Sheet

PE3C6788-24

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------------|---------|---------------|---------|-----------------|
| Frequency Range | DC | | 5.8 | GHz |
| Velocity of Propagation | | 66 | | % |
| RF Shielding | 90 | | | dB |
| Group Delay | | 1.54 [5.05] | | ns/ft [ns/m] |
| Capacitance | | 30.8 [101.05] | | pF/ft [pF/m] |
| Inductance | | 0.077 [0.25] | | uH/ft [uH/m] |
| DC Resistance Inner Conductor | | 81 [265.75] | | Ω/1000ft [Ω/Km] |
| DC Resistance Outer Conductor | | 9.5 [31.17] | | Ω/1000ft [Ω/Km] |
| Jacket Spark | | | 2,000 | Vrms |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|------|------|------|------|------|-------|
| Frequency | 0.25 | 0.5 | 1 | 2.5 | 5.8 | GHz |
| Insertion Loss (Typ.) | 0.43 | 0.53 | 0.68 | 0.99 | 1.48 | dB |

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector

Mechanical Specifications

Cable Assembly

| | |
|----------|--------------------|
| Length* | 24 in [609.6 mm] |
| Diameter | 0.57 in [14.48 mm] |

Cable

| | |
|--------------------------------------|---------------------|
| Cable Type | LMR-100A |
| Impedance | 50 Ohms |
| Inner Conductor Type | Solid |
| Inner Conductor Material and Plating | Copper Clad Steel |
| Dielectric Type | PE |
| Number of Shields | 2 |
| Shield Layer 1 | Aluminum Tape |
| Shield Layer 2 | Tinned Copper Braid |
| Jacket Material | PVC, Black |
| Jacket Diameter | 0.11 in [2.79 mm] |

| | |
|------------------------------|-------------------|
| One Time Minimum Bend Radius | 0.25 in [6.35 mm] |
|------------------------------|-------------------|

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to MCX Jack Bulkhead Low Loss Cable 24 Inch Length Using LMR-100 Coax PE3C6788-24](#)



BNC Male to MCX Jack Bulkhead Low Loss Cable 24 Inch Length Using LMR-100 Coax

RF Cable Assemblies Technical Data Sheet

PE3C6788-24

| | |
|------------------------------|------------------------|
| Repeated Minimum Bend Radius | 1 in [25.4 mm] |
| Bending Moment | 0.1 lbs-ft [0.14 N-m] |
| Flat Plate Crush | 10 lbs/in [0.18 Kg/mm] |
| Tensile Strength | 15 lbs [6.8 Kg] |

Connectors

| Description | Connector 1 | Connector 2 |
|------------------------------------|-----------------|------------------------|
| Type | BNC Male | MCX Jack Bulkhead |
| Specification | MIL-STD-348A | CECC 22220 |
| Impedance | 50 Ohms | 50 Ohms |
| Contact Material and Plating | Brass, Gold | Beryllium Copper, Gold |
| Contact Plating Specification | 50 µin minimum | 50 µin minimum |
| Dielectric Type | PTFE | PTFE |
| Body Material and Plating | Brass, Nickel | Brass, Gold |
| Body Plating Specification | 100 µin minimum | 30 µin minimum |
| Coupling Nut Material and Plating | Brass, Nickel | |
| Coupling Nut Plating Specification | 100 µin minimum | |

Environmental Specifications

Temperature

| | |
|-----------------|------------------|
| Operating Range | -40 to +85 deg C |
| Storage Range | -70 to +85 deg C |

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to MCX Jack Bulkhead Low Loss Cable 24 Inch Length Using LMR-100 Coax PE3C6788-24](#)



BNC Male to MCX Jack Bulkhead Low Loss Cable 24 Inch Length Using LMR-100 Coax

RF Cable Assemblies Technical Data Sheet

PE3C6788-24

How to Order

Part Number Configuration:

PE3C6788

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C6788-12 = 12 inches long cable
PE3C6788-100cm = 100 cm long cable

BNC Male to MCX Jack Bulkhead Low Loss Cable 24 Inch Length Using LMR-100 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to MCX Jack Bulkhead Low Loss Cable 24 Inch Length Using LMR-100 Coax PE3C6788-24](#)


URL: <https://www.pasternack.com/bnc-male-mcx-jack-lmr100-cable-assembly-pe3c6788-24-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C6788-24 CAD Drawing

BNC Male to MCX Jack Bulkhead Low Loss Cable 24 Inch Length Using LMR-100 Coax

| REVISIONS | | | |
|-----------|-----------------|----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 3/5/2020 | SELLIS |

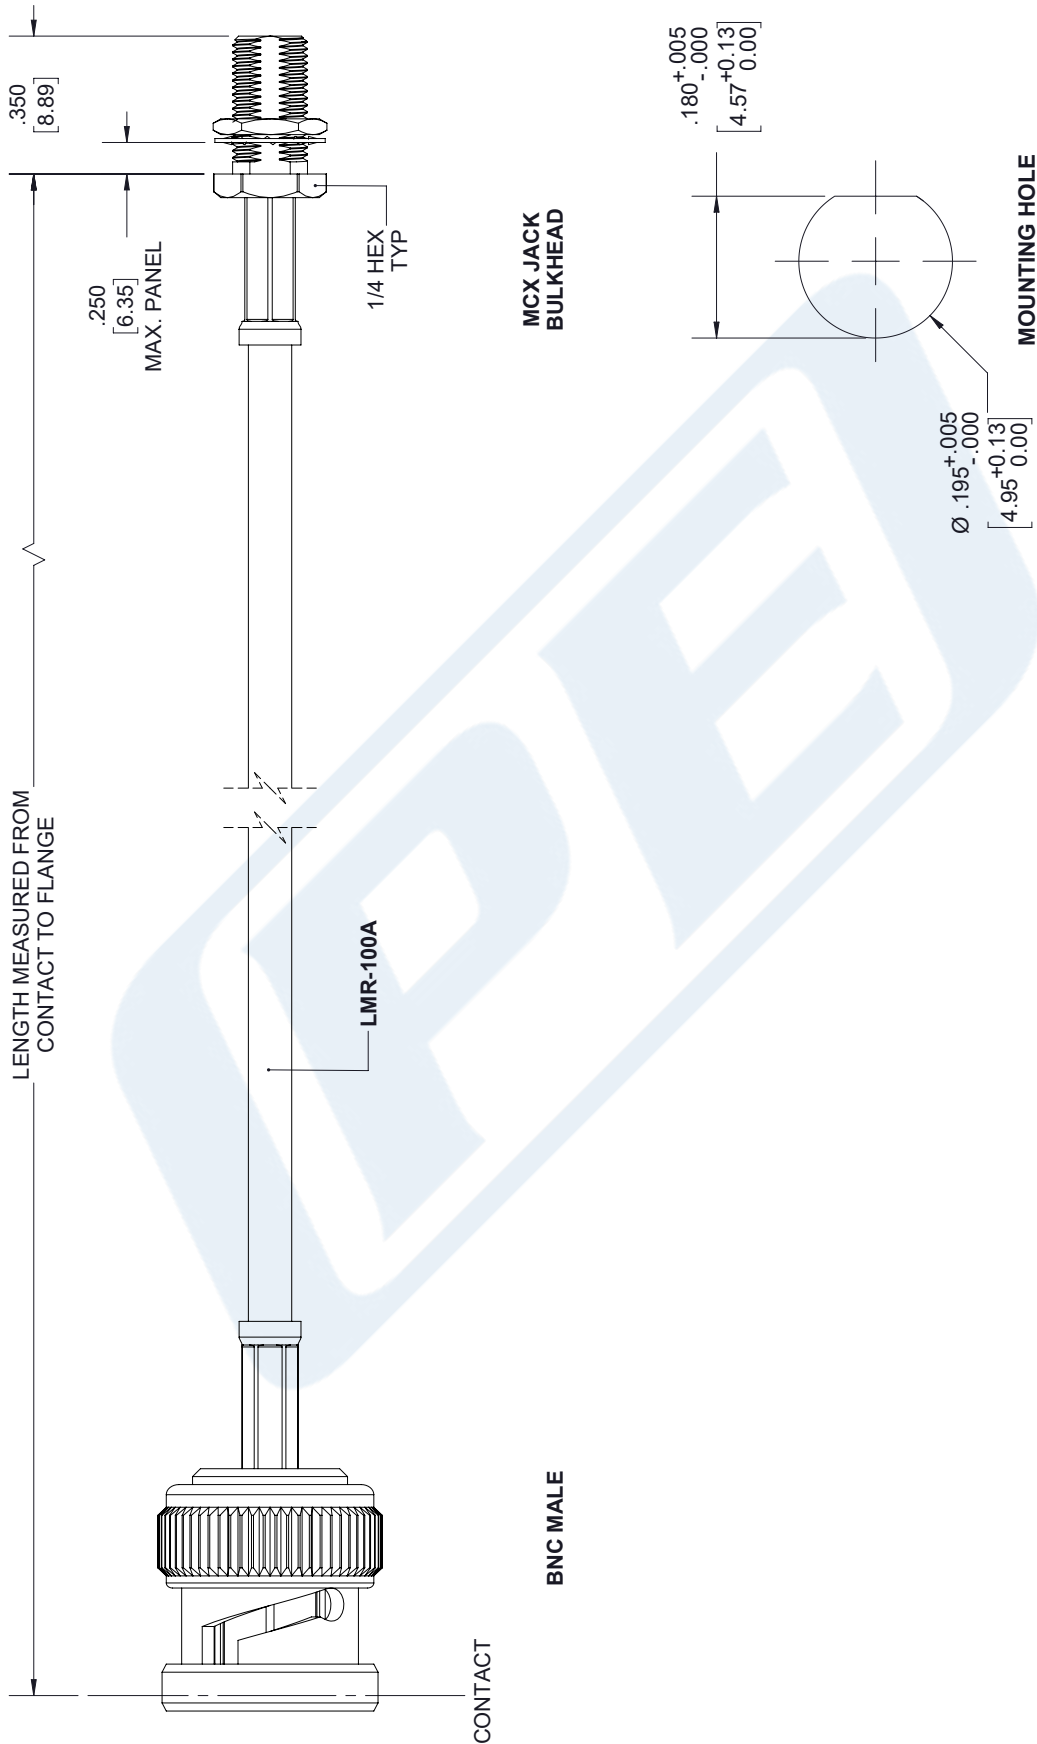

| | |
|--|--------------|
| UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS | |
| TOLERANCES: | FRACTIONS |
| .X = ± .2 | [5.08] |
| .XX = ± .02 | [.51] |
| .XXX = ± .005 | [.13] |
| ANGLES ± 1° | |
| CABLE LENGTH (L) TOLERANCES: | |
| L ≤ 12 [305] | ± .1 [25] |
| 12 [305] < L ≤ 60 [1524] | ± .2 [51] |
| 60 [1524] < L ≤ 120 [3048] | ± .4 [102] |
| 120 [3048] < L ≤ 300 [7620] | ± .6 [152] |
| 300 [7620] < L | ± .5% L / -0 |
| ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY. | |

| | |
|---|--|
| THIRD-ANGLE PROJECTION | |
| THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION ALL RIGHTS RESERVED. | |
| SHEET 1 OF 1 | |
| SCALE N/A | |
| REV A | |
| ITEM NO. PE3C6788 | |
| DRAWN BY K.DANG | |
| CAGE CODE A 53919 | |
| PASTERNAK® an INFINITI® brand | |
| Pasternack Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasternack.com E-mail: sales@pasternack.com | |

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.