



SMA Male to SMA Male Cable 24 Inch Length
Using PE-086FLEX Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3CA1039-24

Configuration

- Connector 1: SMA Male
- Connector 2: SMA Male
- Cable Type: PE-086FLEX

Features

- Max Frequency 26.5 GHz
- Shielding Effectivity > 90 dB
- 69.5% Phase Velocity
- Double Shielded
- FEP Jacket
- 500 Mating Cycles


Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3CA1039-24 SMA male to SMA male 24 inch cable using PE-086FLEX coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to SMA cable assembly has a male to male gender configuration with 50 ohm flexible PE-086FLEX coax. The PE3CA1039-24 SMA male to SMA male cable assembly operates to 26.5 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

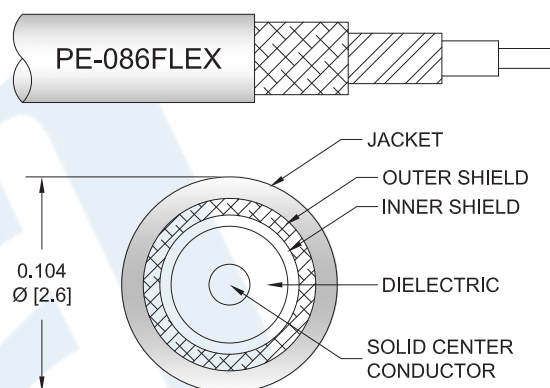

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Cable 24 Inch Length Using PE-086FLEX Coax , LF Solder PE3CA1039-24](#)



SMA Male to SMA Male Cable 24 Inch Length
Using PE-086FLEX Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3CA1039-24

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		26.5	GHz
VSWR			1.4:1	
Return Loss			15.56	dB
Velocity of Propagation		69.5		%
RF Shielding	90			dB
Group Delay		1.44 [4.72]		ns/ft [ns/m]
Capacitance		29.4 [96.46]		pF/ft [pF/m]
Operating Voltage (AC)			250	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	3	6	12	18	26.5	GHz
Insertion Loss (Max.)	1.04	1.5	2.17	2.75	3.35	dB
VSWR (Max.)	1.08:1	1.12:1	1.2:1	1.3:1	1.4:1	
Power Handling (Max.)	81	50	40	33	26	W

Mechanical Specifications

Cable Assembly

Length*

24 in [609.6 mm]

Weight

0.048 lbs [21.77 g]

Cable

Cable Type

PE-086FLEX

Impedance

50 Ohms

Inner Conductor Type

Solid

Inner Conductor Material and Plating

Copper Clad Steel, Silver

Dielectric Type

PTFE

Number of Shields

2

Shield Layer 1

Silver Plated Copper Tape

Shield Layer 2

Silver Plated Copper Braid

Outer Conductor 1 Material and Plating

Silver Plated Copper Tape

Outer Conductor 2 Material and Plating

Silver Plated Copper Braid

Jacket Material

FEP

Jacket Diameter

0.104 in [2.64 mm]

One Time Minimum Bend Radius

0.24 in [6.1 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Cable 24 Inch Length Using PE-086FLEX Coax , LF Solder PE3CA1039-24](#)



SMA Male to SMA Male Cable 24 Inch Length
Using PE-086FLEX Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3CA1039-24

Repeated Minimum Bend Radius 0.79 in [20.07 mm]

Connectors

Description	Connector 1	Connector 2
Type	SMA Male	SMA Male
Impedance	50 Ohms	50 Ohms
Mating Cycles	500	500
Contact Material and Plating	Brass, Gold	Brass, Gold
Dielectric Type	PTFE	PTFE
Body Material and Plating	Stainless Steel, Gold	Stainless Steel, Gold
Coupling Nut Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Hex Size	5/16 Inch	5/16 Inch

Environmental Specifications

Temperature

Operating Range -40 to +150 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Cable 24 Inch Length Using PE-086FLEX Coax , LF Solder PE3CA1039-24](#)




SMA Male to SMA Male Cable 24 Inch Length
Using PE-086FLEX Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3CA1039-24

Typical Performance Data

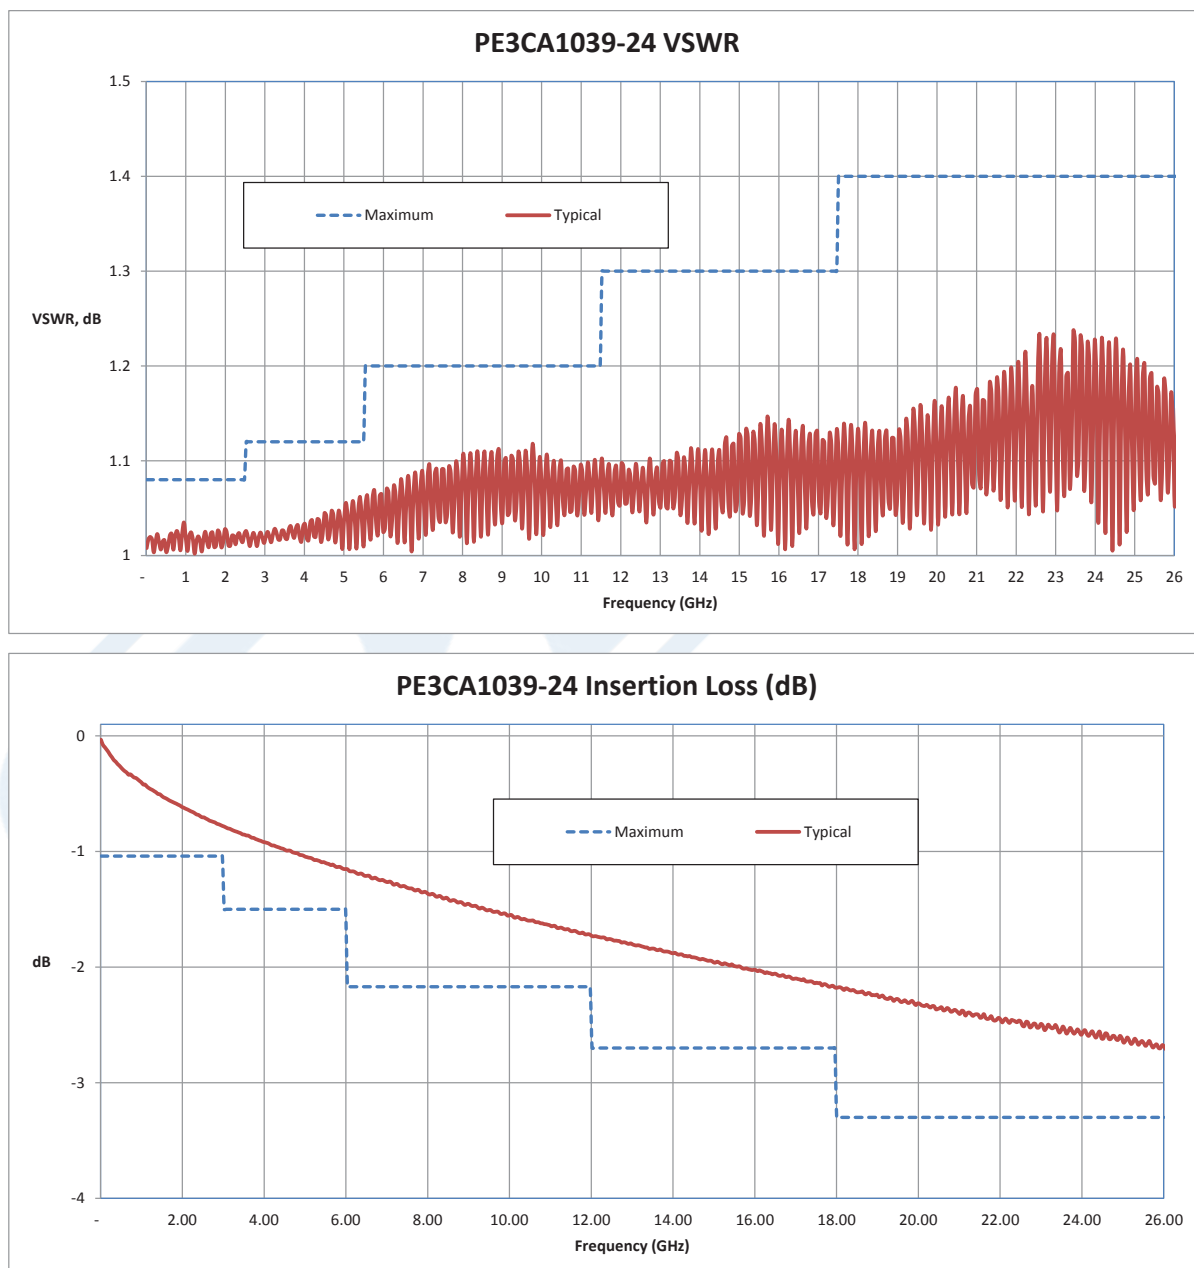

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Cable 24 Inch Length Using PE-086FLEX Coax , LF Solder PE3CA1039-24](#)



SMA Male to SMA Male Cable 24 Inch Length
Using PE-086FLEX Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3CA1039-24

How to Order

Part Number Configuration:

PE3CA1039

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3CA1039-12 = 12 inches long cable
PE3CA1039-100cm = 100 cm long cable

SMA Male to SMA Male Cable 24 Inch Length Using PE-086FLEX Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Cable 24 Inch Length Using PE-086FLEX Coax , LF Solder PE3CA1039-24](https://www.pasternack.com/sma-male-sma-male-pe-086flex-cable-assembly-pe3ca1039-24-p.aspx)


URL: <https://www.pasternack.com/sma-male-sma-male-pe-086flex-cable-assembly-pe3ca1039-24-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3CA1039-24 CAD Drawing

SMA Male to SMA Male Cable 24 Inch Length Using PE-086FLEX Coax , LF Solder

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	4/21/2020	S.ELLIS

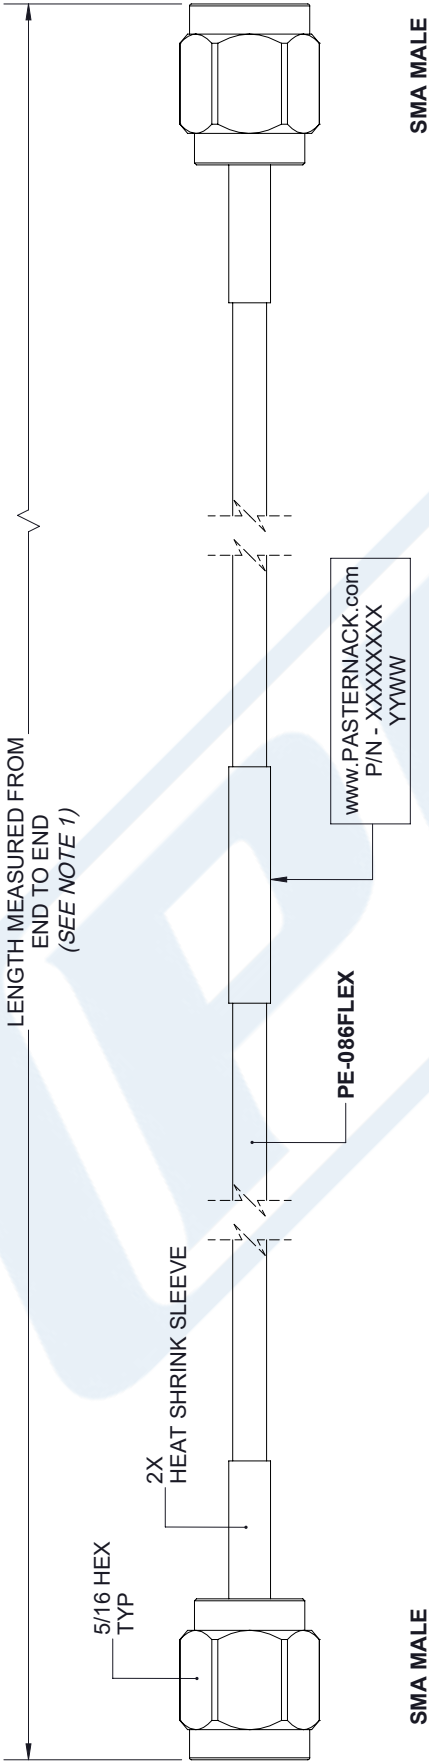

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

.X = ± .2	[.08]	FRACTIONS
.XX = ± .02	[.51]	± 1/32
.XXX = ± .005	[.13]	ANGLES ± 1°

CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305]	= +1 [25] / -0
12 [305] < L ≤ 60 [1524]	= +2 [51] / -0
60 [1524] < L ≤ 120 [3048]	= +4 [102] / -0
120 [3048] < L ≤ 300 [7620]	= +6 [152] / -0
300 [7620] < L	= +5% L / -0

ALL DIMENSIONS SHOWN
ARE FOR REFERENCE ONLY.

PE PASTERNAK
an INFINITI brand

Pasternack Enterprises, Inc.
P.O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
Website: www.pasternack.com
E-mail: sales@pasternack.com

THIRD-ANGLE PROJECTION

THE INFORMATION AND
DESIGN IN THIS DOCUMENT
IS THE PROPERTY OF
PASTERNAK CORPORATION
ALL RIGHTS RESERVED.

SHEET	1	OF	1
SCALE	N/A		
REV	A		

SIZE	CAGE CODE	DRAWN BY	ITEM NO.
A	53919	K.DANG	PE3CA1039

- NOTES:
- CABLE LENGTH (L) TOLERANCES: ± 2% L.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.