

2.4mm Male to 2.4mm Female Cable 60 Inch Length Using PE-SR405AL Coax




PE3W00790-60

RF Cable Assemblies Technical Data Sheet

Configuration

- Connector 1: 2.4mm Male
- Connector 2: 2.4mm Female
- Cable Type: PE-SR405AL

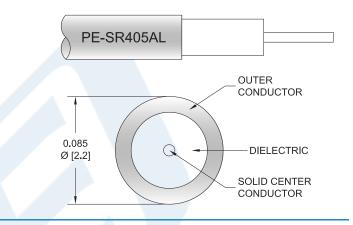

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		40	GHz
VSWR			1.4:1	
Return Loss			-15.563	dB

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	10	20			GHz
Insertion Loss (Typ.)	1.35	4.25	6.75			dB

Mechanical Specifications

Cable Assembly Length* Diameter

Cable

Cable Type Cable Type Impedance Inner Conductor Type Inner Conductor Material and Plating 60 in [152.4 cm] 0.33 in [8.38 mm]

PE-SR405AL 50 Ohms Solid Copper Clad Steel, Silver

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 2.4mm Male to 2.4mm Female Cable 60 Inch Length Using PE-SR405AL Coax PE3W00790-60

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451 **Sales@Pasternack.com** • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered





2.4mm Male to 2.4mm Female Cable 60 Inch Length Using PE-SR405AL Coax

RF Cable Assemblies Technical Data Sheet

Dielectric Type Number of Shields Shield Layer 1 Outer Conductor Diameter



PE3W00790-60

PTFE 1 Tinned Aluminum 0.086 in [2.18 mm]

Connectors

Description	Connector 1	Connector 2		
Туре	2.4mm Male	2.4mm Female		
Impedance	50 Ohms	50 Ohms		
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold		
Contact Plating Specification	MIL-G-45204	MIL-G-45204, Type II, Class 2		
Dielectric Type	Noryl	PEI		
Body Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel		
Body Plating Specification	ASTM A380	QQ-P-35		
Coupling Nut Material and Plating	Passivated Stainless Steel			
Coupling Nut Plating Specification	ASTM A380			
Hex Size	5/16 in.			
Torque	8 in-lbs [0.9 Nm]			

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or \pm 3/8", whichever is greater.

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 2.4mm Male to 2.4mm Female Cable 60 Inch Length Using PE-SR405AL Coax PE3W00790-60

ISO 9001 : 2008 Registered

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451 Sales@Pasternack.com • Techsupport@Pasternack.com

© 2017 Pasternack Enterprises All Rights Reserved



2.4mm Male to 2.4mm Female Cable 60 Inch Length Using PE-SR405AL Coax



PE3W00790-60

RF Cable Assemblies Technical Data Sheet

How to Order Part Number Configuration: PE3W00790 uu - XX - Unit of Measure: cm = Centimeters <blank> = Inches Lenath **Base Number** PE3W00790-12 = 12 inches long cable Example: PE3W00790-100cm = 100 cm long cable 2.4mm Male to 2.4mm Female Cable 60 Inch Length Using PE-SR405AL Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry. Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 2.4mm Male to 2.4mm Female Cable 60 Inch Length Using PE-SR405AL Coax PE3W00790-60 URL: https://www.pasternack.com/2.4mm-male-2.4mm-female-pe-sr405al-cable-assembly-pe3w00790-60-p.aspx The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451 Sales@Pasternack.com • Techsupport@Pasternack.com



PE3W00790-60 CAD Drawing 2.4mm Male to 2.4mm Female Cable 60 Inch Length Using PE-SR405AL Coax

