



N Male to TNC Male Cable 24 Inch Length Using LMR-600-DB Coax

RF Cable Assemblies Technical Data Sheet


PE3W02356-24

Configuration

- Connector 1: N Male
- Connector 2: TNC Male
- Cable Type: LMR-600-DB

Features

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 87% Phase Velocity
- Double Shielded
- PE Jacket

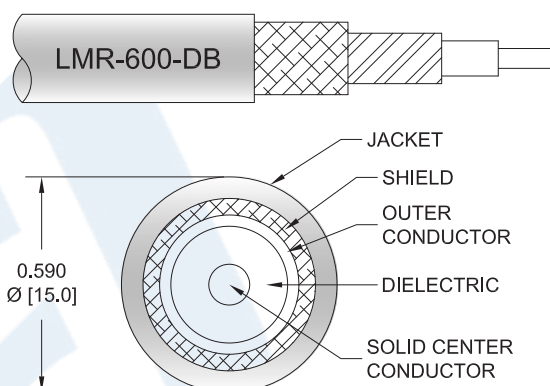

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W02356-24 type N male to TNC male 24 inch cable using LMR-600-DB coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to TNC cable assembly has a male to male gender configuration with 50 ohm flexible LMR-600-DB coax. The PE3W02356-24 type N male to TNC male cable assembly operates to 5.8 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to TNC Male Cable 24 Inch Length Using LMR-600-DB Coax PE3W02356-24](#)



N Male to TNC Male Cable 24 Inch Length Using LMR-600-DB Coax

RF Cable Assemblies Technical Data Sheet

PE3W02356-24

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------------|---------|--------------|---------|-----------------|
| Frequency Range | DC | | 5.8 | GHz |
| VSWR | | | 1.4:1 | |
| Return Loss | | | -15.56 | dB |
| Velocity of Propagation | | 87 | | % |
| RF Shielding | 90 | | | dB |
| Group Delay | | 1.17 [3.84] | | ns/ft [ns/m] |
| Capacitance | | 23.4 [76.77] | | pF/ft [pF/m] |
| Inductance | | 0.058 [0.19] | | uH/ft [uH/m] |
| DC Resistance Inner Conductor | | 0.53 [1.74] | | Ω/1000ft [Ω/Km] |
| DC Resistance Outer Conductor | | 1.2 [3.94] | | Ω/1000ft [Ω/Km] |
| Jacket Spark | | | 8,000 | Vrms |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|------|------|------|------|------|-------|
| Frequency | 0.25 | 0.5 | 1 | 2.5 | 5.8 | GHz |
| Insertion Loss (Max.) | 0.23 | 0.24 | 0.25 | 0.29 | 0.35 | dB |

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.2dB of connector loss.

Mechanical Specifications

Cable Assembly

| | |
|----------|-------------------|
| Length* | 24 in [609.6 mm] |
| Diameter | 0.8 in [20.32 mm] |

Cable

| | |
|--------------------------------------|----------------------|
| Cable Type | LMR-600-DB |
| Impedance | 50 Ohms |
| Inner Conductor Type | Solid |
| Inner Conductor Material and Plating | Copper Clad Aluminum |
| Dielectric Type | PE (F) |
| Number of Shields | 2 |
| Shield Layer 1 | Aluminum Tape |
| Shield Layer 2 | Tinned Copper Braid |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to TNC Male Cable 24 Inch Length Using LMR-600-DB Coax PE3W02356-24](#)



N Male to TNC Male Cable 24 Inch Length
Using LMR-600-DB Coax

RF Cable Assemblies Technical Data Sheet

PE3W02356-24

| | |
|------------------------------|------------------------|
| Jacket Material | PE, Black |
| Jacket Diameter | 0.59 in [14.99 mm] |
| One Time Minimum Bend Radius | 1.5 in [38.1 mm] |
| Repeated Minimum Bend Radius | 6 in [152.4 mm] |
| Bending Moment | 2.75 lbs-ft [3.73 N-m] |
| Flat Plate Crush | 60 lbs/in [1.07 Kg/mm] |
| Tensile Strength | 350 lbs [158.76 Kg] |

Connectors

| Description | Connector 1 | Connector 2 |
|------------------------------------|---------------------|------------------------|
| Type | N Male | TNC Male |
| Impedance | 50 Ohms | 50 Ohms |
| Mating Cycles | | 500 |
| Contact Material and Plating | Brass, Gold | Beryllium Copper, Gold |
| Contact Plating Specification | 50µ in. minimum | |
| Dielectric Type | PTFE | PTFE |
| Body Material and Plating | Brass, Tri-Metal | Brass, Tri-Metal |
| Body Plating Specification | 100µ in. minimum | |
| Coupling Nut Material and Plating | Brass, Tri-Metal | Brass, Tri-Metal |
| Coupling Nut Plating Specification | 100µ in. minimum | |
| Hex Size | 20.57 mm | |
| Torque | 44 in-lbs [4.97 Nm] | |

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8"$, whichever is greater.

Environmental Specifications

Temperature

Operating Range -40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to TNC Male Cable 24 Inch Length Using LMR-600-DB Coax PE3W02356-24](#)




N Male to TNC Male Cable 24 Inch Length
Using LMR-600-DB Coax

RF Cable Assemblies Technical Data Sheet

PE3W02356-24

Typical Performance Data

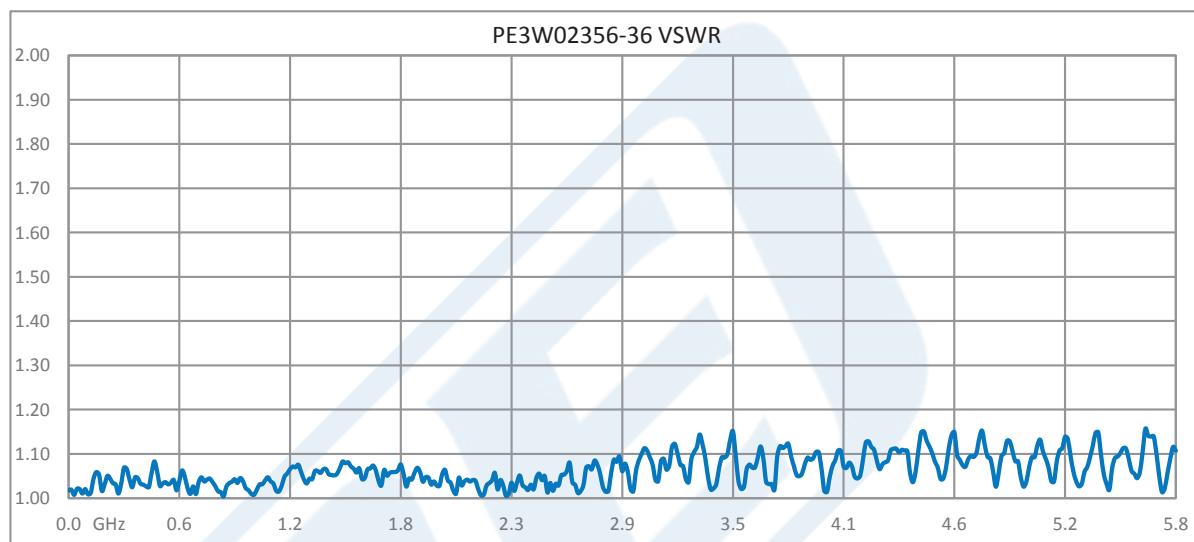

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to TNC Male Cable 24 Inch Length Using LMR-600-DB Coax PE3W02356-24](#)



N Male to TNC Male Cable 24 Inch Length Using LMR-600-DB Coax

RF Cable Assemblies Technical Data Sheet

PE3W02356-24

How to Order

Part Number Configuration:

PE3W02356

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W02356-12 = 12 inches long cable
PE3W02356-100cm = 100 cm long cable

N Male to TNC Male Cable 24 Inch Length Using LMR-600-DB Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to TNC Male Cable 24 Inch Length Using LMR-600-DB Coax PE3W02356-24](https://www.pasternack.com/n-male-tnc-male-lmr600db-cable-assembly-pe3w02356-24-p.aspx)

URL: <https://www.pasternack.com/n-male-tnc-male-lmr600db-cable-assembly-pe3w02356-24-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W02356-24 CAD Drawing

N Male to TNC Male Cable 24 Inch Length Using LMR-600-DB Coax

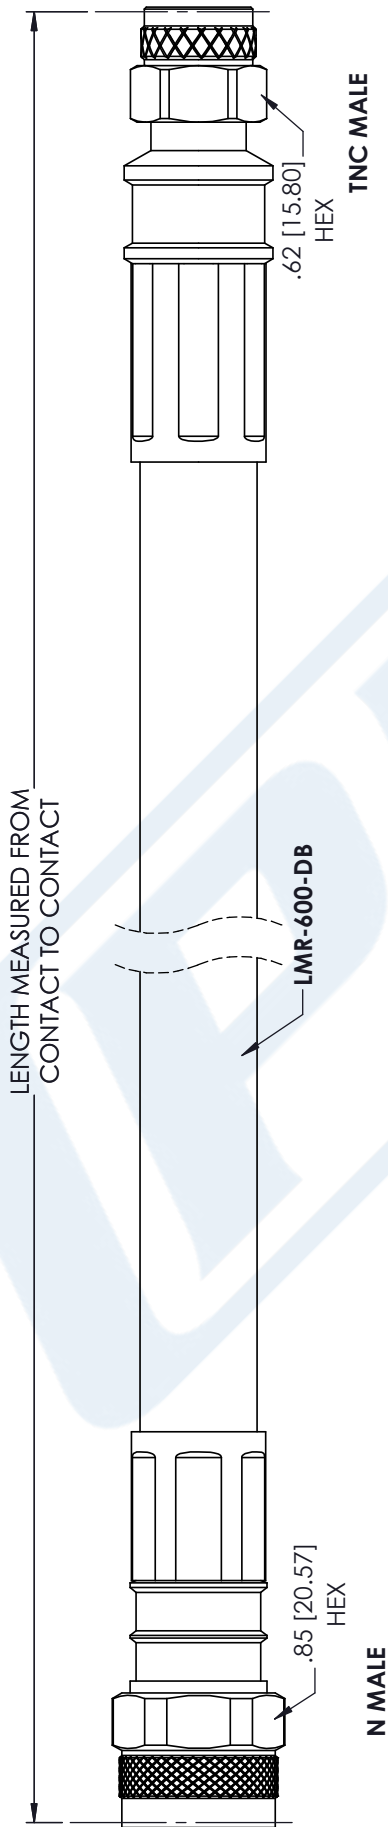

| STANDARD TOLERANCES | |
|---------------------|--------|
| .X | ±0.2 |
| .XX | ±0.01 |
| .XXX | ±0.005 |

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES



PASTERNAK®
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

| | |
|-----------|-----------|
| DWG TITLE | PE3W02356 |
| CAGE CODE | 53919 |

| | | | | | | | |
|---|----------|----------|-------|-----|------|---|--------|
| NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm]. | CAD FILE | 10/22/18 | SCALE | N/A | SIZE | A | CN2379 |
|---|----------|----------|-------|-----|------|---|--------|