



## SMA Male to Reverse Polarity SMA Male Cable 24 Inch Length Using RG188-DS Coax with HeatShrink

### RF Cable Assemblies Technical Data Sheet


PE3W05475/HS-24

#### Configuration

- Connector 1: SMA Male
- Connector 2: SMA Male Reverse Polarity
- Cable Type: RG188-DS

#### Features

- Max Frequency 3 GHz
- Double Shielded
- PTFE Jacket

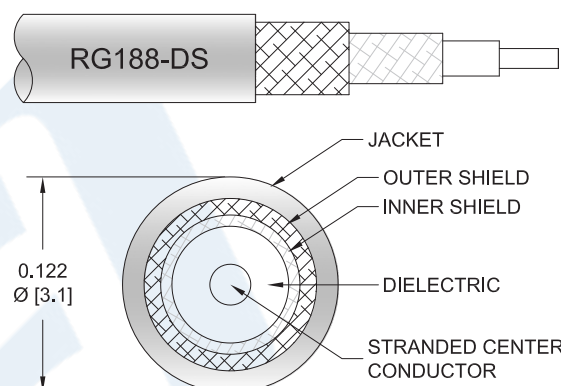

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3W05475/HS-24 SMA male to reverse polarity SMA male 24 inch cable using RG188-DS coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to reverse polarity SMA cable assembly has a male to male gender configuration with 50 ohm flexible RG188-DS coax. The PE3W05475/HS-24 SMA male to reverse polarity SMA male cable assembly operates to 3 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.45:1	
Capacitance		32 [104.99]		pF/ft [pF/m]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to Reverse Polarity SMA Male Cable 24 Inch Length Using RG188-DS Coax with HeatShrink PE3W05475/HS-24](#)



## SMA Male to Reverse Polarity SMA Male Cable 24 Inch Length Using RG188-DS Coax with HeatShrink

### RF Cable Assemblies Technical Data Sheet

PE3W05475/HS-24

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	3	GHz
Insertion Loss (Max.)	0.49	0.593	0.8	1.166	1.29	dB

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax use in this assembly. The Insertion Loss includes an estimated insertion loss of 0.2dB of connector Loss

#### Mechanical Specifications

##### Cable Assembly

Length*	24 in [609.6 mm]
Diameter	0.315 in [8 mm]

##### Cable

Cable Type	RG188-DS
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	2
Shield Layer 1	Silver Plated Copper Braid
Shield Layer 2	Silver Plated Copper Braid
Jacket Material	PTFE, White
Jacket Diameter	0.118 in [3 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to Reverse Polarity SMA Male Cable 24 Inch Length Using RG188-DS Coax with HeatShrink PE3W05475/HS-24](#)



SMA Male to Reverse Polarity SMA Male Cable 24 Inch  
Length Using RG188-DS Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3W05475/HS-24

**Connectors**

Description	Connector 1	Connector 2
Type	SMA Male	SMA Male Reverse Polarity
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Gold
Contact Plating Specification	30 $\mu$ in minimum	
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 $\mu$ in minimum	
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 $\mu$ in minimum	
Hex Size	5/16 inch	5/16 in
Torque	3 in-lbs [0.34 Nm]	5 in-lbs [0.57 Nm]

Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8$ ", whichever is greater.

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to Reverse Polarity SMA Male Cable 24 Inch Length Using RG188-DS Coax with HeatShrink PE3W05475/HS-24](#)



## SMA Male to Reverse Polarity SMA Male Cable 24 Inch Length Using RG188-DS Coax with HeatShrink

### RF Cable Assemblies Technical Data Sheet

PE3W05475/HS-24

#### How to Order

Part Number Configuration:

PE3W05475/HS

- xx

uu

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3W05475/HS-12 = 12 inches long cable  
PE3W05475/HS-100cm = 100 cm long cable

SMA Male to Reverse Polarity SMA Male Cable 24 Inch Length Using RG188-DS Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to Reverse Polarity SMA Male Cable 24 Inch Length Using RG188-DS Coax with HeatShrink PE3W05475/HS-24](https://www.pasternack.com/sma-male-sma-male-rg188-ds-cable-assembly-pe3w05475-hs-24-p.aspx)

URL: <https://www.pasternack.com/sma-male-sma-male-rg188-ds-cable-assembly-pe3w05475-hs-24-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

**PE3W05475/HS-24 CAD Drawing**  
SMA Male to Reverse Polarity SMA Male Cable 24 Inch  
Length Using RG188-DS Coax with HeatShrink

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/23/19	SELLIS

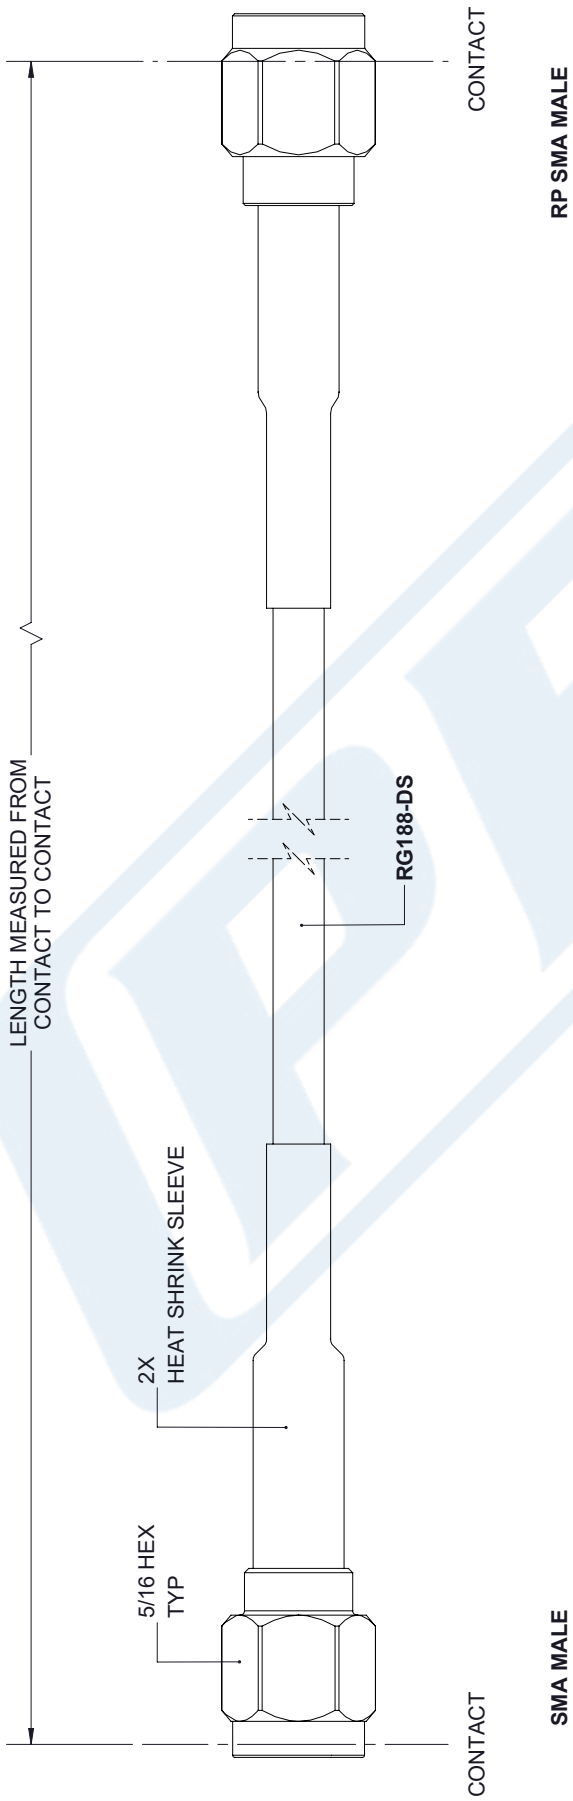

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS	
TOLERANCES:	FRACTIONS
X±.2 [5.08]	±.132
.XX±.01 [.25]	±.132
.XXX±.005 [.13]	±.132
ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.	
THIRD-ANGLE PROJECTION	

<b>PE PASTERNAK</b> an INFINITI brand	
Pasternack Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920   1.866.727.8376 Fax: 1.949.261.7451 www.pasternack.com   e-mail: sales@pasternack.com	
SIZE	PART NUMBER
A	PE3W05475/HS
CAGE	DRAWN BY
53919	K.DANG
REV	REV
	A

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED.	
SHEET	OF
1	1
SCALE	N/A

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT  
ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.