



Reverse Polarity TNC Female Bulkhead to SSMC Plug Right Angle Cable 36 Inch Length Using RG188 Coax

RF Cable Assemblies Technical Data Sheet

PE3W05762-36

Configuration

- Connector 1: TNC Female Reverse Polarity Bulkhead
- Connector 2: SSMC Plug Right Angle
- Cable Type: RG188

Features

- Max Frequency 400 MHz
- PTFE Jacket

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W05762-36 reverse polarity TNC female bulkhead to SSMC plug right angle 36 inch cable using RG188 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack reverse polarity TNC to SSMC cable assembly has a female to plug gender configuration with 50 ohm flexible RG188 coax. The PE3W05762-36 reverse polarity TNC female to SSMC plug cable assembly operates to 400 MHz. The right angle SSMC interface on the RG188 cable allows for easier connections in tight spaces. Our RF cable assembly with TNC bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-----------------|---------|---------|---------|-------|
| Frequency Range | DC | | 400 | MHz |
| VSWR | | | 1.5:1 | |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|-----|----|----|----|----|-------|
| Frequency | 400 | | | | | MHz |
| Insertion Loss (Max.) | 1.1 | | | | | dB |

Electrical Specification Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity TNC Female Bulkhead to SSMC Plug Right Angle Cable 36 Inch Length Using RG188 Coax PE3W05762-36](#)



Reverse Polarity TNC Female Bulkhead to SSMC Plug Right Angle Cable 36 Inch Length Using RG188 Coax

RF Cable Assemblies Technical Data Sheet

PE3W05762-36

The Insertion Loss data above is based on the performance specifications of the coax use in this assembly. The Insertion Loss includes an estimated insertion loss of 0.3dB of connector Loss

Mechanical Specifications

Cable Assembly

| | |
|----------|--------------------|
| Length* | 36 in [914.4 mm] |
| Diameter | 0.75 in [19.05 mm] |

Cable

| | |
|--------------------------------------|----------------------------|
| Cable Type | RG188 |
| Impedance | 50 Ohms |
| Inner Conductor Type | Stranded |
| Inner Conductor Material and Plating | Copper Clad Steel, Silver |
| Dielectric Type | PTFE |
| Number of Shields | 1 |
| Shield Layer 1 | Silver Plated Copper Braid |
| Jacket Material | PTFE, White |
| Jacket Diameter | 0.11 in [2.79 mm] |

Connectors

| Description | Connector 1 | Connector 2 |
|------------------------------------|--------------------------------------|------------------------|
| Type | TNC Female Reverse Polarity Bulkhead | SSMC Plug Right Angle |
| Impedance | 50 Ohms | 50 Ohms |
| Mating Cycles | | 500 |
| Contact Material and Plating | Phosphor Bronze, Gold | Beryllium Copper, Gold |
| Contact Plating Specification | 30 µin minimum | MIL-G-45204 |
| Dielectric Type | PTFE | Teflon |
| Body Material and Plating | Brass, Nickel | Brass, Gold |
| Body Plating Specification | | MIL-G-45204 |
| Coupling Nut Material and Plating | | Beryllium Copper, Gold |
| Coupling Nut Plating Specification | | MIL-G-45204 |
| Torque | | 1.75 in-lbs [0.2 Nm] |

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8"$, whichever is greater.

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity TNC Female Bulkhead to SSMC Plug Right Angle Cable 36 Inch Length Using RG188 Coax PE3W05762-36](#)



Reverse Polarity TNC Female Bulkhead to SSMC Plug Right Angle Cable 36 Inch Length Using RG188 Coax

RF Cable Assemblies Technical Data Sheet

PE3W05762-36

How to Order

Part Number Configuration:

PE3W05762

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W05762-12 = 12 inches long cable
PE3W05762-100cm = 100 cm long cable

Reverse Polarity TNC Female Bulkhead to SSMC Plug Right Angle Cable 36 Inch Length Using RG188 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity TNC Female Bulkhead to SSMC Plug Right Angle Cable 36 Inch Length Using RG188 Coax PE3W05762-36](https://www.pasternack.com/tnc-female-ssmc-plug-rg188au-cable-assembly-pe3w05762-36-p.aspx)


URL: <https://www.pasternack.com/tnc-female-ssmc-plug-rg188au-cable-assembly-pe3w05762-36-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W05762-36 CAD Drawing

Reverse Polarity TNC Female Bulkhead to SSMC Plug
Right Angle Cable 36 Inch Length Using RG188 Coax

| REVISIONS | | | |
|-----------|-----------------|----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 05/10/19 | SELLIS |

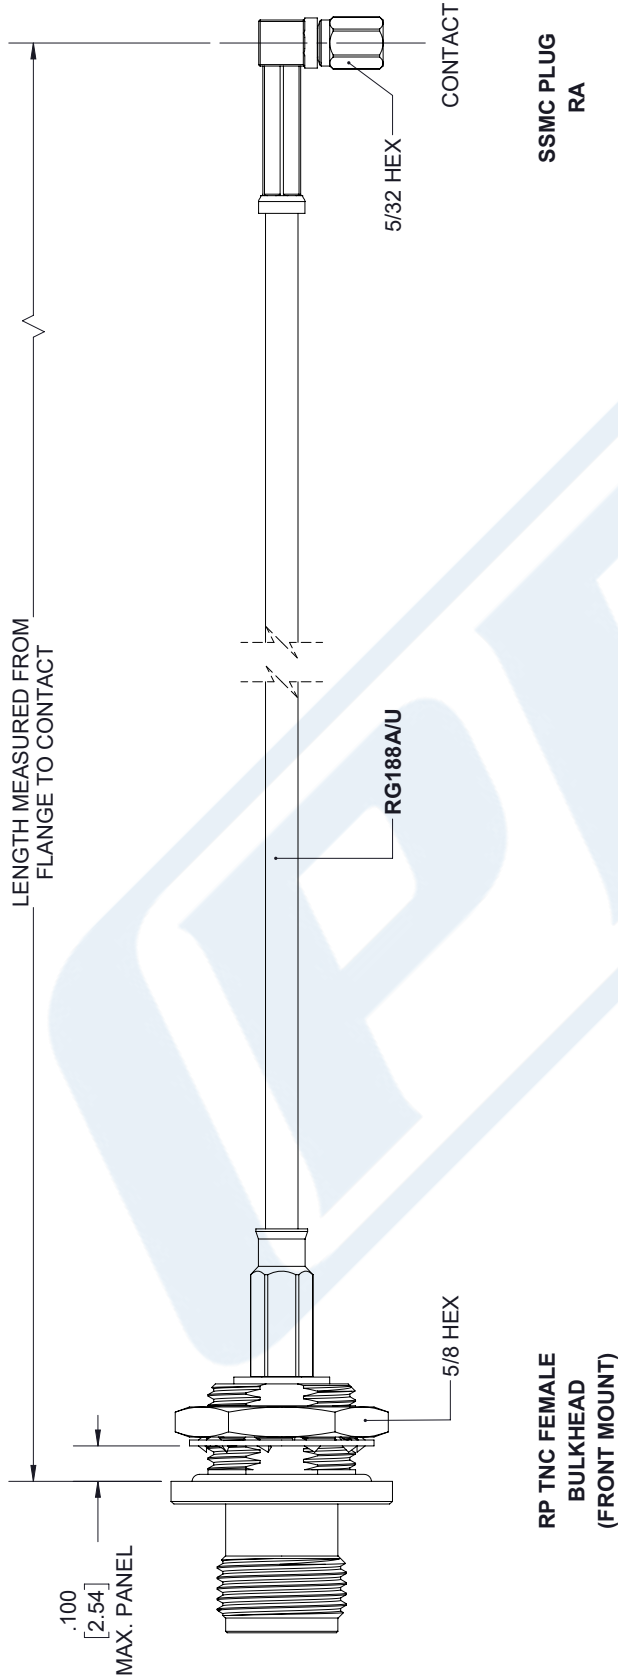

| | |
|--|-----------|
| UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS | |
| TOLERANCES: | FRACTIONS |
| X±.2 [5.08] | ±.132 |
| .XX±.01 [.25] | ±.132 |
| .XXX±.005 [.13] | ±.132 |
| ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY. | |
| THIRD-ANGLE PROJECTION | |

| | |
|---|-----------|
| PE PASTERNAK an INFINITO brand | |
| Pasternack Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 www.pasternack.com e-mail: sales@pasternack.com | |
| SIZE | A |
| CAGE | 53919 |
| DRAWN BY | K.DANG |
| PART NUMBER | PE3W05762 |
| REV | A |

| | |
|--|--------|
| THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED. | |
| SHEET | 1 OF 1 |
| SCALE | N/A |

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.