



## N Female Bulkhead to BNC Male Right Angle Cable 200 cm Length Using RG400 Coax with HeatShrink, LF Solder

### RF Cable Assemblies Technical Data Sheet

PE3W06449LF/HS-200CM

#### Configuration

- Connector 1: N Female Bulkhead
- Connector 2: BNC Male Right Angle
- Cable Type: RG400

#### Features

- Max Frequency 3 GHz
- 70% Phase Velocity
- Double Shielded
- FEP Jacket

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3W06449LF/HS-200CM type N female bulkhead to BNC male right angle 200 cm cable using RG400 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to BNC cable assembly has a female to male gender configuration with 50 ohm flexible RG400 coax. The PE3W06449LF/HS-200CM type N female to BNC male cable assembly operates to 3 GHz. The right angle BNC interface on the RG400 cable allows for easier connections in tight spaces. Our RF cable assembly with type N bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		70		%
Capacitance		32 [104.99]		pF/ft [pF/m]
Operating Voltage (AC)			500	Vrms

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female Bulkhead to BNC Male Right Angle Cable 200 cm Length Using RG400 Coax with HeatShrink, LF Solder PE3W06449LF/HS-200CM](#)



# N Female Bulkhead to BNC Male Right Angle Cable 200 cm Length Using RG400 Coax with HeatShrink, LF Solder

## RF Cable Assemblies Technical Data Sheet

PE3W06449LF/HS-200CM

### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	4	GHz
Insertion Loss (Max.)	0.7	0.89	1.27	1.79	1.96	dB

### Electrical Specification Notes:

The Insertion Loss data above is base on the performance specifications of the coax use in the assembly. The Insertion Loss includes an estimated insertion loss of 0.3dB of connector loss.

### Mechanical Specifications

#### Cable Assembly

Length*	78.74 in [200 cm]
Diameter	0.8 in [20.32 mm]

#### Cable

Cable Type	RG400
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	PTFE
Number of Shields	2
Shield Layer 1	Silver Plated Copper Braid
Shield Layer 2	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.195 in [4.95 mm]

Repeated Minimum Bend Radius	1 in [25.4 mm]
------------------------------	----------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female Bulkhead to BNC Male Right Angle Cable 200 cm Length Using RG400 Coax with HeatShrink, LF Solder PE3W06449LF/HS-200CM](#)



N Female Bulkhead to BNC Male Right Angle Cable 200 cm  
Length Using RG400 Coax with HeatShrink, LF Solder

## RF Cable Assemblies Technical Data Sheet

PE3W06449LF/HS-200CM

### Connectors

Description	Connector 1	Connector 2
Type	N Female Bulkhead	BNC Male Right Angle
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 µin minimum	30 µin minimum
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating	Brass, Nickel	
Outer Conductor Plating Specification	100 µin minimum	
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	100 µin minimum
Coupling Nut Material and Plating		Brass, Nickel
Coupling Nut Plating Specification		100 µin minimum

Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8"$ , whichever is greater.

### Environmental Specifications

#### Temperature

Operating Range -55 to +165 deg C

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female Bulkhead to BNC Male Right Angle Cable 200 cm Length Using RG400 Coax with HeatShrink, LF Solder PE3W06449LF/HS-200CM](#)



N Female Bulkhead to BNC Male Right Angle Cable 200 cm  
Length Using RG400 Coax with HeatShrink, LF Solder

## RF Cable Assemblies Technical Data Sheet

PE3W06449LF/HS-200CM

### How to Order

Part Number Configuration:

**PE3W06449LF/HS - xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3W06449LF/HS-12 = 12 inches long cable  
PE3W06449LF/HS-100cm = 100 cm long cable

N Female Bulkhead to BNC Male Right Angle Cable 200 cm Length Using RG400 Coax with HeatShrink, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female Bulkhead to BNC Male Right Angle Cable 200 cm Length Using RG400 Coax with HeatShrink, LF Solder PE3W06449LF/HS-200CM](#)


URL: <https://www.pasternack.com/n-female-bnc-male-rg400u-cable-assembly-pe3w06449lf-hs-200cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3W06449LF/HS-200CM CAD Drawing

N Female Bulkhead to BNC Male Right Angle Cable 200 cm  
Length Using RG400 Coax with HeatShrink, LF Solder

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/23/19	SELLIS

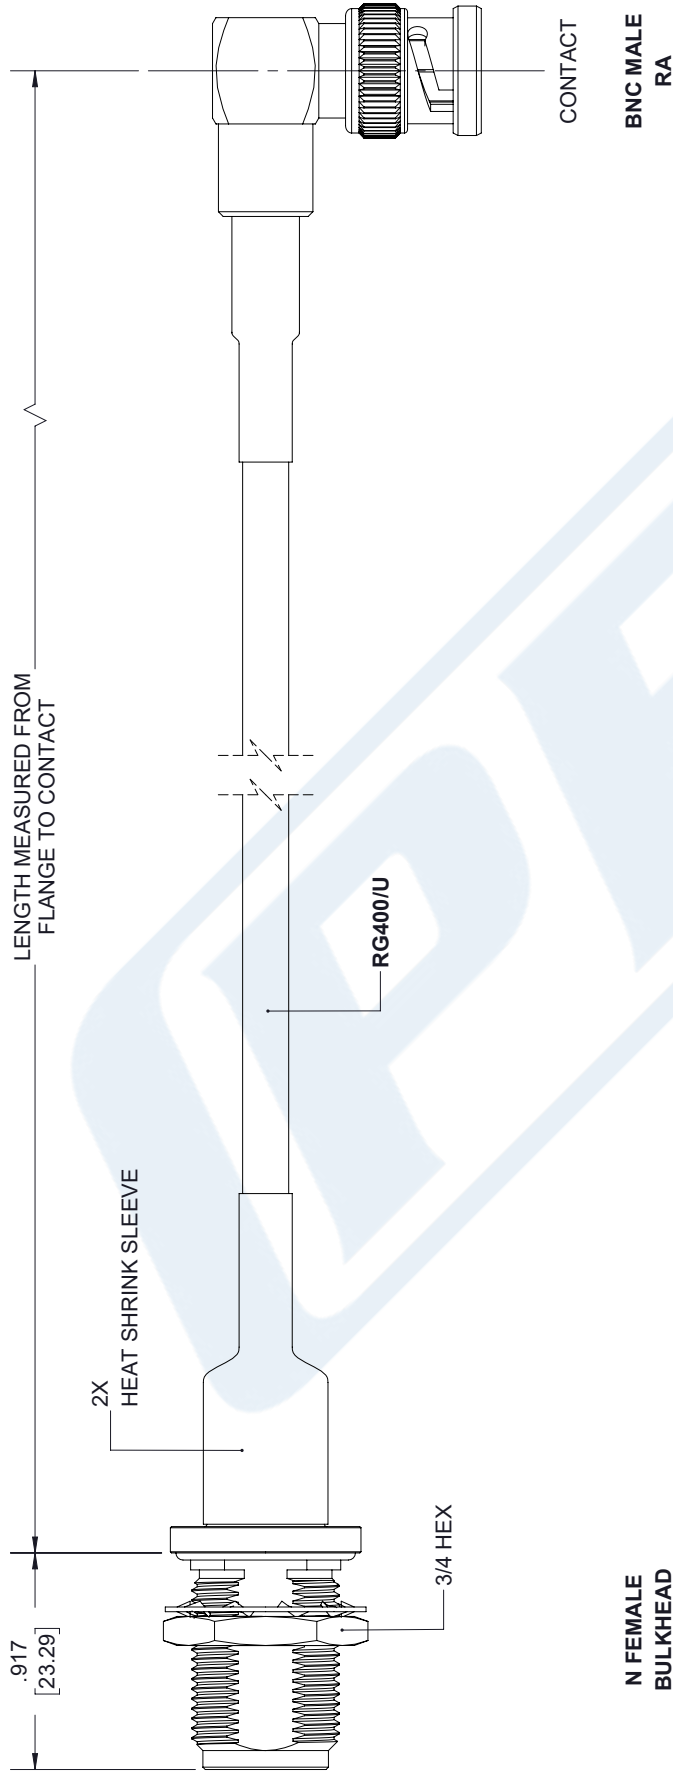

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE IN INCHES DIMENSIONS IN [ ] ARE MILLIMETERS			
TOLERANCES:			
X±.2	[5.08]	FRACTIONS	
.XX±.01	[.25]		+132
.XXX±.005	[.13]	ANGLES ± 1°	
ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.			
THIRD-ANGLE PROJECTION			

<b>PE PASTERNAK</b> an INFINITO brand		Pasternack Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920   1.866.727.8376 Fax: 1.949.261.7451 www.pasternack.com   e-mail: sales@pasternack.com	
SIZE	CAGE	DRAWN BY	PART NUMBER
A	53919	K.DANG	PE3W06449LF/HS
REV			A

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED.			
SHEET	1	OF	1
SCALE	N/A		

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT  
ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.