



SSMB Plug to SMA Male Cable 36 Inch Length Using RG188-DS Coax

RF Cable Assemblies Technical Data Sheet


PE3W06717-36

**Configuration**

- Connector 1: SSMB Plug
- Connector 2: SMA Male
- Cable Type: RG188-DS

**Features**

- Max Frequency 6 GHz
- Double Shielded
- PTFE Jacket

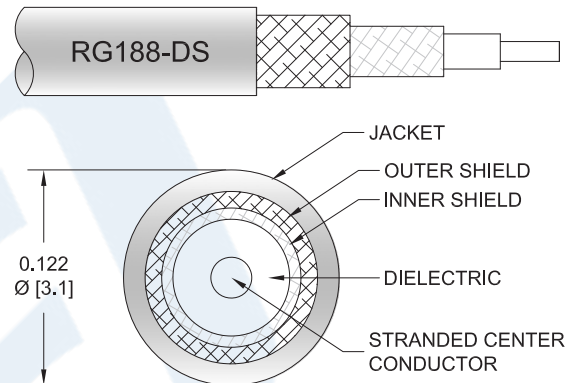

**Applications**

- General Purpose
- Laboratory Use

**Description**

Pasternack's PE3W06717-36 SSMB plug to SMA male 36 inch cable using RG188-DS coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SSMB to SMA cable assembly has a plug to male gender configuration with 50 ohm flexible RG188-DS coax. The PE3W06717-36 SSMB plug to SMA male cable assembly operates to 6 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

**Electrical Specifications**

| Description     | Minimum | Typical     | Maximum | Units        |
|-----------------|---------|-------------|---------|--------------|
| Frequency Range | DC      |             | 6       | GHz          |
| VSWR            |         |             | 1.5:1   |              |
| Capacitance     |         | 32 [104.99] |         | pF/ft [pF/m] |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMB Plug to SMA Male Cable 36 Inch Length Using RG188-DS Coax PE3W06717-36](#)



SSMB Plug to SMA Male Cable 36 Inch  
Length Using RG188-DS Coax

RF Cable Assemblies Technical Data Sheet

PE3W06717-36

**Specifications by Frequency**

| Description           | F1  | F2  | F3   | F4   | F5   | Units |
|-----------------------|-----|-----|------|------|------|-------|
| Frequency             | 0.5 | 1   | 2    | 4    | 6    | GHz   |
| Insertion Loss (Max.) | 0.7 | 1.1 | 1.25 | 1.98 | 2.72 | dB    |

**Electrical Specification Notes:**

The Insertion Loss data above is based on the performance specifications of the coax use in this assembly. The Insertion Loss includes an estimated insertion loss of 0.2dB of connector Loss

**Mechanical Specifications**

**Cable Assembly**

Length\* 36 in [914.4 mm]  
Diameter 0.313 in [7.95 mm]

**Cable**

Cable Type RG188-DS  
Impedance 50 Ohms  
Inner Conductor Type Stranded  
Inner Conductor Material and Plating Copper Clad Steel, Silver  
Dielectric Type PTFE  
Number of Shields 2  
Shield Layer 1 Silver Plated Copper Braid  
Shield Layer 2 Silver Plated Copper Braid  
Jacket Material PTFE, White  
Jacket Diameter 0.118 in [3 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMB Plug to SMA Male Cable 36 Inch Length Using RG188-DS Coax PE3W06717-36](#)



## SSMB Plug to SMA Male Cable 36 Inch Length Using RG188-DS Coax

### RF Cable Assemblies Technical Data Sheet

PE3W06717-36

#### Connectors

| Description                        | Connector 1            | Connector 2        |
|------------------------------------|------------------------|--------------------|
| Type                               | SSMB Plug              | SMA Male           |
| Specification                      | MIL-STD-348A           | MIL-STD-348A       |
| Impedance                          | 50 Ohms                | 50 Ohms            |
| Contact Material and Plating       | Beryllium Copper, Gold | Brass, Gold        |
| Contact Plating Specification      | 30µ in. minimum        | 50 µin minimum     |
| Dielectric Type                    | Teflon                 | PTFE               |
| Body Material and Plating          | Beryllium Copper, Gold | Brass, Nickel      |
| Body Plating Specification         | 30µ in. minimum        | 100 µin minimum    |
| Coupling Nut Material and Plating  |                        | Brass, Nickel      |
| Coupling Nut Plating Specification |                        | 100 µin minimum    |
| Hex Size                           |                        | 5/16 inch          |
| Torque                             |                        | 3 in-lbs [0.34 Nm] |

#### Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or ± 3/8", whichever is greater.

#### Environmental Specifications

##### Temperature

Operating Range -55 to +165 deg C

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMB Plug to SMA Male Cable 36 Inch Length Using RG188-DS Coax PE3W06717-36](#)



SSMB Plug to SMA Male Cable 36 Inch  
Length Using RG188-DS Coax

RF Cable Assemblies Technical Data Sheet

PE3W06717-36

**How to Order**

Part Number Configuration:

**PE3W06717**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3W06717-12 = 12 inches long cable  
PE3W06717-100cm = 100 cm long cable

SSMB Plug to SMA Male Cable 36 Inch Length Using RG188-DS Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMB Plug to SMA Male Cable 36 Inch Length Using RG188-DS Coax PE3W06717-36](https://www.pasternack.com/ssmb-plug-sma-male-rg188-ds-cable-assembly-pe3w06717-36-p.aspx)


URL: <https://www.pasternack.com/ssmb-plug-sma-male-rg188-ds-cable-assembly-pe3w06717-36-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3W06717-36 CAD Drawing

## SSMB Plug to SMA Male Cable 36 Inch Length Using RG188-DS Coax


| REVISIONS |                 |          |
|-----------|-----------------|----------|
| REV.      | DESCRIPTION     | DATE     |
| A         | INITIAL RELEASE | 05/10/19 |
|           |                 | APPROVED |
|           |                 | S. ELLIS |

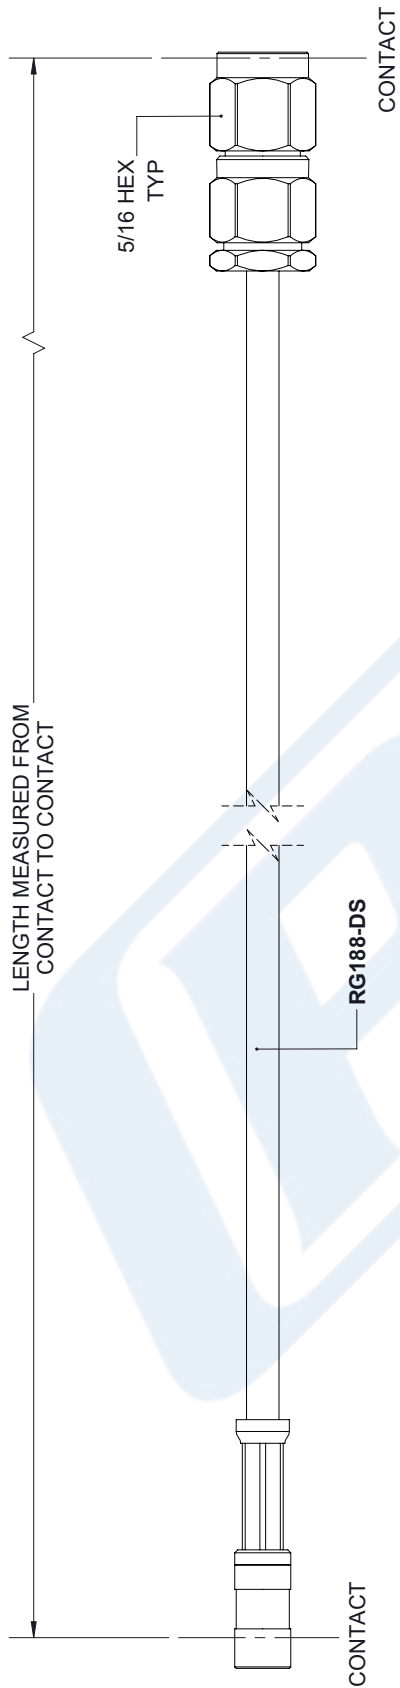

**SSMB PLUG**

**SMA MALE**

|  |             |
|--|-------------|
| UNLESS OTHERWISE SPECIFIED<br>LEADING DIMENSIONS ARE INCHES<br>DIMENSIONS IN [ ] ARE MILLIMETERS |             |
| TOLERANCES:  | FRACTIONS   |
| X±.2   | [5/16]      |
| .XX±.01  | [.25]       |
| .XXX±.005  | [.13]       |
|  | ±.132       |
|  | ANGLES ± 1° |
| ALL DIMENSIONS SHOWN<br>ARE FOR REFERENCE ONLY.  |             |
| THIRD-ANGLE PROJECTION   |             |

|   |                          |  |
|---|--------------------------|--|
|  <b>PASTERNAK</b><br>an INFINITO brand   |                          | THE INFORMATION AND<br>DESIGN IN THIS DOCUMENT<br>IS THE PROPERTY OF<br>PASTERNAK CORPORATION.<br>ALL RIGHTS RESERVED. |
| Pasternack Enterprises, Inc.<br>P.O. Box 16759, Irvine, CA 92623.<br>Phone: 1.949.261.1920   1.866.727.8376<br>Fax: 1.949.261.7451<br>www.pasternack.com   e-mail: sales@pasternack.com |                          | SHEET 1 OF 1<br>SCALE N/A  |
| SIZE A<br>CAGE 53919<br>DRAWN BY K.DANG   | PART NUMBER<br>PE3W06717 | REV A  |

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.