



MMCX Plug to SMC Plug Cable 36 Inch Length Using RG178 Coax

RF Cable Assemblies Technical Data Sheet

PE3W07653-36

Configuration

- Connector 1: MMCX Plug
- Connector 2: SMC Plug
- Cable Type: RG178

Features

- 70% Phase Velocity
- FEP Jacket

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W07653-36 MMCX plug to SMC plug 36 inch cable using RG178 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack MMCX to SMC cable assembly has a plug to plug gender configuration with 50 ohm flexible RG178 coax.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------|---------|--------------|---------|--------------|
| Velocity of Propagation | | 70 | | % |
| Capacitance | | 29.4 [96.46] | | pF/ft [pF/m] |

Mechanical Specifications

Cable Assembly

| | |
|----------|-------------------|
| Length* | 36 in [914.4 mm] |
| Diameter | 0.25 in [6.35 mm] |

Cable

| | |
|--------------------------------------|---------------------------|
| Cable Type | RG178 |
| Impedance | 50 Ohms |
| Inner Conductor Type | Stranded |
| Inner Conductor Material and Plating | Copper Clad Steel, Silver |
| Dielectric Type | PTFE |
| Number of Shields | 1 |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MMCX Plug to SMC Plug Cable 36 Inch Length Using RG178 Coax PE3W07653-36](#)



MMCX Plug to SMC Plug Cable 36 Inch Length Using RG178 Coax

RF Cable Assemblies Technical Data Sheet

PE3W07653-36

Shield Layer 1 Silver Plated Copper Braid
Jacket Material FEP, Tan
Jacket Diameter 0.072 in [1.83 mm]

Repeated Minimum Bend Radius 0.4 in [10.16 mm]

Connectors

| Description | Connector 1 | Connector 2 |
|------------------------------------|-------------|------------------------|
| Type | MMCX Plug | SMC Plug |
| Specification | | MIL-STD-348A |
| Impedance | 50 Ohms | 50 Ohms |
| Contact Material and Plating | Gold | Beryllium Copper, Gold |
| Contact Plating Specification | | 30 µin minimum |
| Dielectric Type | PTFE | PTFE |
| Body Material and Plating | Brass, Gold | Brass, Nickel |
| Body Plating Specification | | 100 µin minimum |
| Coupling Nut Material and Plating | | Brass, Nickel |
| Coupling Nut Plating Specification | | 100 µin minimum |
| Hex Size | | 1/4 inch |

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8"$, whichever is greater.

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MMCX Plug to SMC Plug Cable 36 Inch Length Using RG178 Coax PE3W07653-36](#)



MMX Plug to SMC Plug Cable 36 Inch Length Using RG178 Coax

RF Cable Assemblies Technical Data Sheet

PE3W07653-36

How to Order

Part Number Configuration:

PE3W07653

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W07653-12 = 12 inches long cable
PE3W07653-100cm = 100 cm long cable

MMX Plug to SMC Plug Cable 36 Inch Length Using RG178 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MMX Plug to SMC Plug Cable 36 Inch Length Using RG178 Coax PE3W07653-36](https://www.pasternack.com/mmxc-plug-smc-plug-rg178bu-cable-assembly-pe3w07653-36-p.aspx)

URL: <https://www.pasternack.com/mmxc-plug-smc-plug-rg178bu-cable-assembly-pe3w07653-36-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W07653-36 CAD Drawing
MMCX Plug to SMC Plug Cable 36 Inch Length Using RG178 Coax

| REVISIONS | | | |
|-----------|-----------------|----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 04/30/19 | SELLIS |

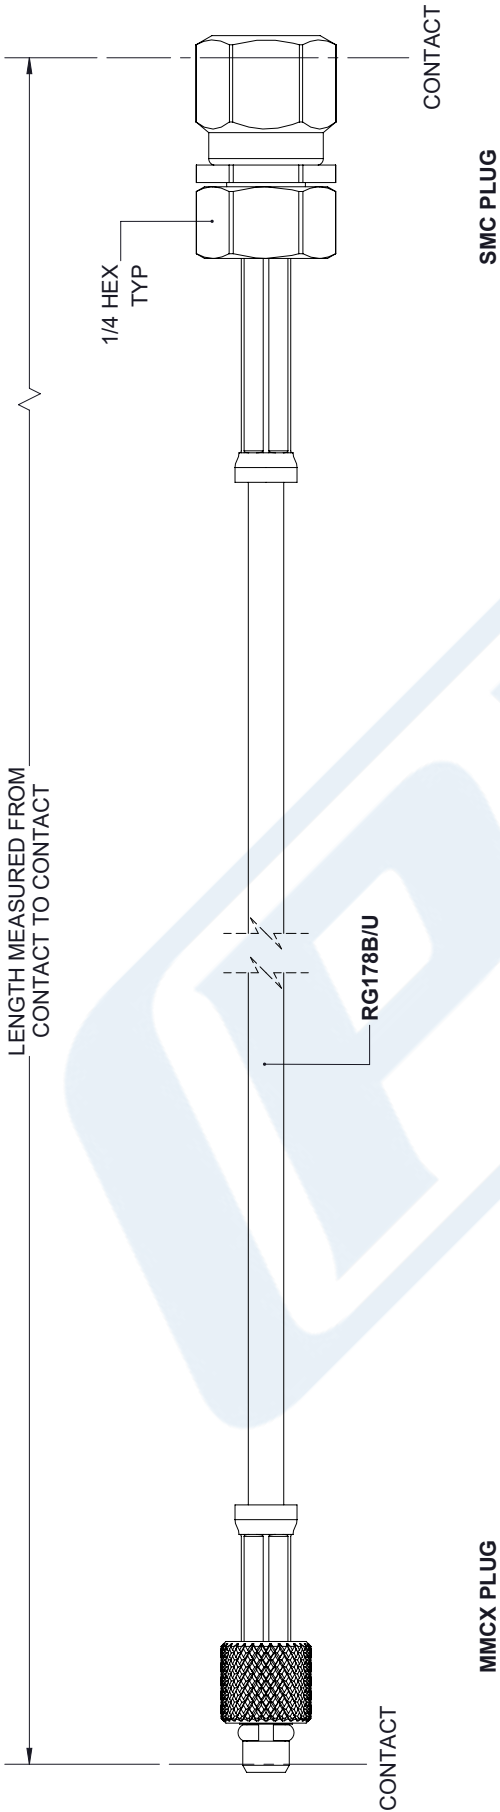

| | |
|--|-------------|
| UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS | |
| TOLERANCES: | FRACTIONS |
| X±.2 [5.08] | ±.132 |
| .XX±.01 [.25] | ±.005 |
| .XXX±.005 [.13] | ANGLES ± 1° |
| ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY. | |
| THIRD-ANGLE PROJECTION | |

| | |
|---|-----------|
| PE PASTERNAK an INFINITI brand | |
| Pasternack Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 www.pasternack.com e-mail: sales@pasternack.com | |
| SIZE | A |
| CAGE | 53919 |
| DRAWN BY | K.DANG |
| PART NUMBER | PE3W07653 |
| REV | A |

| | |
|--|--------|
| THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED. | |
| SHEET | 1 OF 1 |
| SCALE | N/A |

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.