



## MCX Plug Right Angle to SMP Female Right Angle Cable 18 Inch Using PE-SR405FL Coax

### RF Cable Assemblies Technical Data Sheet

PE3W08556-18

#### Configuration

- Connector 1: MCX Plug Right Angle
- Connector 2: SMP Female Right Angle
- Cable Type: PE-SR405FL

#### Features

- Max Frequency 6 GHz
- 69.5% Phase Velocity


#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3W08556-18 MCX plug right angle to SMP female right angle 18 inch cable using PE-SR405FL coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack MCX to SMP cable assembly has a plug to female gender configuration with 50 ohm formable PE-SR405FL coax. The PE3W08556-18 MCX plug to SMP female cable assembly operates to 6 GHz. The right angle MCX and right angle SMP interfaces on the PE-SR405FL cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

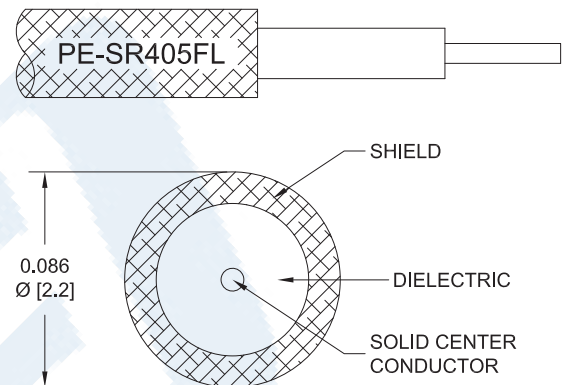

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug Right Angle to SMP Female Right Angle Cable 18 Inch Using PE-SR405FL Coax PE3W08556-18](#)



## MCX Plug Right Angle to SMP Female Right Angle Cable 18 Inch Using PE-SR405FL Coax

### RF Cable Assemblies Technical Data Sheet

PE3W08556-18

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.5:1	
Velocity of Propagation		69.5		%
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Conductor		65.7 [215.55]		$\Omega$ /1000ft [ $\Omega$ /Km]
DC Resistance Outer Conductor		10.2 [33.46]		$\Omega$ /1000ft [ $\Omega$ /Km]

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	6	GHz
Insertion Loss (Max.)	0.57	0.63	0.74	0.93	1.31	dB

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss is estimated as 0.2 dB per MCX plug right angle connector and 0.2 dB per SMP female right angle connector.

#### Mechanical Specifications

##### Cable Assembly

Length*	18 in [457.2 mm]
Diameter	0.24 in [6.1 mm]

##### Cable

Cable Type	PE-SR405FL
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Outer Conductor Material and Plating	Copper, Tin
Repeated Minimum Bend Radius	0.78 in [19.81 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug Right Angle to SMP Female Right Angle Cable 18 Inch Using PE-SR405FL Coax PE3W08556-18](#)



MCX Plug Right Angle to SMP Female Right Angle  
Cable 18 Inch Using PE-SR405FL Coax

RF Cable Assemblies Technical Data Sheet

PE3W08556-18

**Connectors**

Description	Connector 1	Connector 2
Type	MCX Plug Right Angle	SMP Female Right Angle
Specification	MIL-C-39012	DESC 94008
Impedance	50 Ohms	50 Ohms
Mating Cycles	500	
Contact Material and Plating	Brass, Gold over Nickel	Beryllium Copper, Gold
Contact Plating Specification	30 µin minimum	MIL-G-45204
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating	Brass, Gold over Nickel	Beryllium Copper, Gold
Outer Conductor Plating Specification	10 µin minimum	MIL-G-45204
Body Material and Plating	Brass, Gold over Nickel	Beryllium Copper, Gold
Body Plating Specification	10 µin minimum	MIL-G-45204

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug Right Angle to SMP Female Right Angle Cable 18 Inch Using PE-SR405FL Coax PE3W08556-18](#)



# MCX Plug Right Angle to SMP Female Right Angle Cable 18 Inch Using PE-SR405FL Coax

## RF Cable Assemblies Technical Data Sheet

PE3W08556-18

### How to Order

Part Number Configuration:

**PE3W08556**

- **xx**

**uu**

Unit of Measure:  
 cm = Centimeters  
 <blank> = Inches  
 Length  
 Base Number

Example: PE3W08556-12 = 12 inches long cable  
 PE3W08556-100cm = 100 cm long cable

MCX Plug Right Angle to SMP Female Right Angle Cable 18 Inch Using PE-SR405FL Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug Right Angle to SMP Female Right Angle Cable 18 Inch Using PE-SR405FL Coax PE3W08556-18](https://www.pasternack.com/mcx-plug-smp-female-pe-sr405fl-cable-assembly-pe3w08556-18-p.aspx)

URL: <https://www.pasternack.com/mcx-plug-smp-female-pe-sr405fl-cable-assembly-pe3w08556-18-p.aspx>


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3W08556-18 CAD Drawing

## MCX Plug Right Angle to SMP Female Right Angle

### Cable 18 Inch Using PE-SR405FL Coax

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	1/28/2020	S. ELLIS

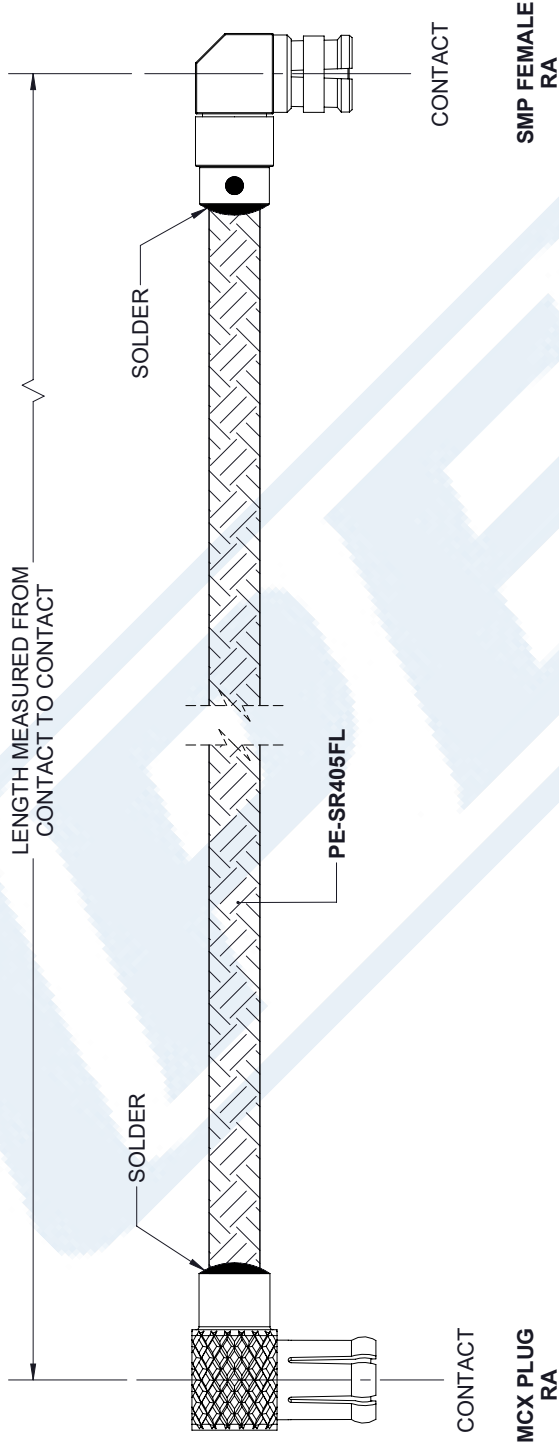

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS

**TOLERANCES:**

.X = ±.2	[.08]	FRACTIONS	
.XX = ±.02	[.51]		± 1/32
.XXX = ±.005	[.13]	ANGLES ± 1°	

**CABLE LENGTH (L) TOLERANCES:**

L ≤ 12 [305]	= +1 [25] / -0
12 [305] < L ≤ 60 [1524]	= +2 [51] / -0
60 [1524] < L ≤ 120 [3048]	= +4 [102] / -0
120 [3048] < L ≤ 300 [7620]	= +6 [152] / -0
300 [7620] < L ≤ ∞	= +5% L / -0

ALL DIMENSIONS SHOWN  
ARE FOR REFERENCE ONLY.

**PE PASTERNAK**  
an INFINITO brand

Pasternack Enterprises, Inc.  
P. O. Box 16759, Irvine, CA 92623.  
Phone: 1.949.261.1920 | 1.866.727.8376  
Fax: 1.949.261.7451  
Website: www.pasternack.com  
E-mail: sales@pasternack.com

ITEM NO. PE3W08556

SIZE A CAGE CODE 53919 DRAWN BY K.DANG

THIRD-ANGLE PROJECTION

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

REV A