

TECHNICAL DATA SHEET

PE44029

Connector	SMA Male
Connector Interface Type	0.015 inch Pin
Cable Attachment Method (Shield/Contact)	Field Replaceable
Body Style	Straight
Mount Method	2 Hole Flange
Option	EMI Gasket

Impedance, Ohms	50
-----------------	----

Size	
Length, in [mm]	0.5 [12.7]
Width/Dia., in [mm]	0.312 [7.92]
Height, in [mm]	0.64 [16.26]
Weight, lbs [g]	0.013 [5.9]

Type	SMA Male
Contact Material and Plating	Gold
Coupling Nut Material and Plating	Brass, Nickel
Hex Size, in.	5/16
Torque, in-lbs [Nm]	5 [0.57]
Body Material and Plating	Passivated Stainless Steel
Dielectric Type	PTFE

RoHS Compliant Yes

Notes: Values at 25 °C, sea level


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Field Replaceable Connector With EMI Gasket 2 Hole Flange 0.015 inch Pin PE44029](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



PE44029 CAD Drawing

SMA Male Field Replaceable Connector With EMI Gasket 2 Hole Flange 0.015 inch Pin

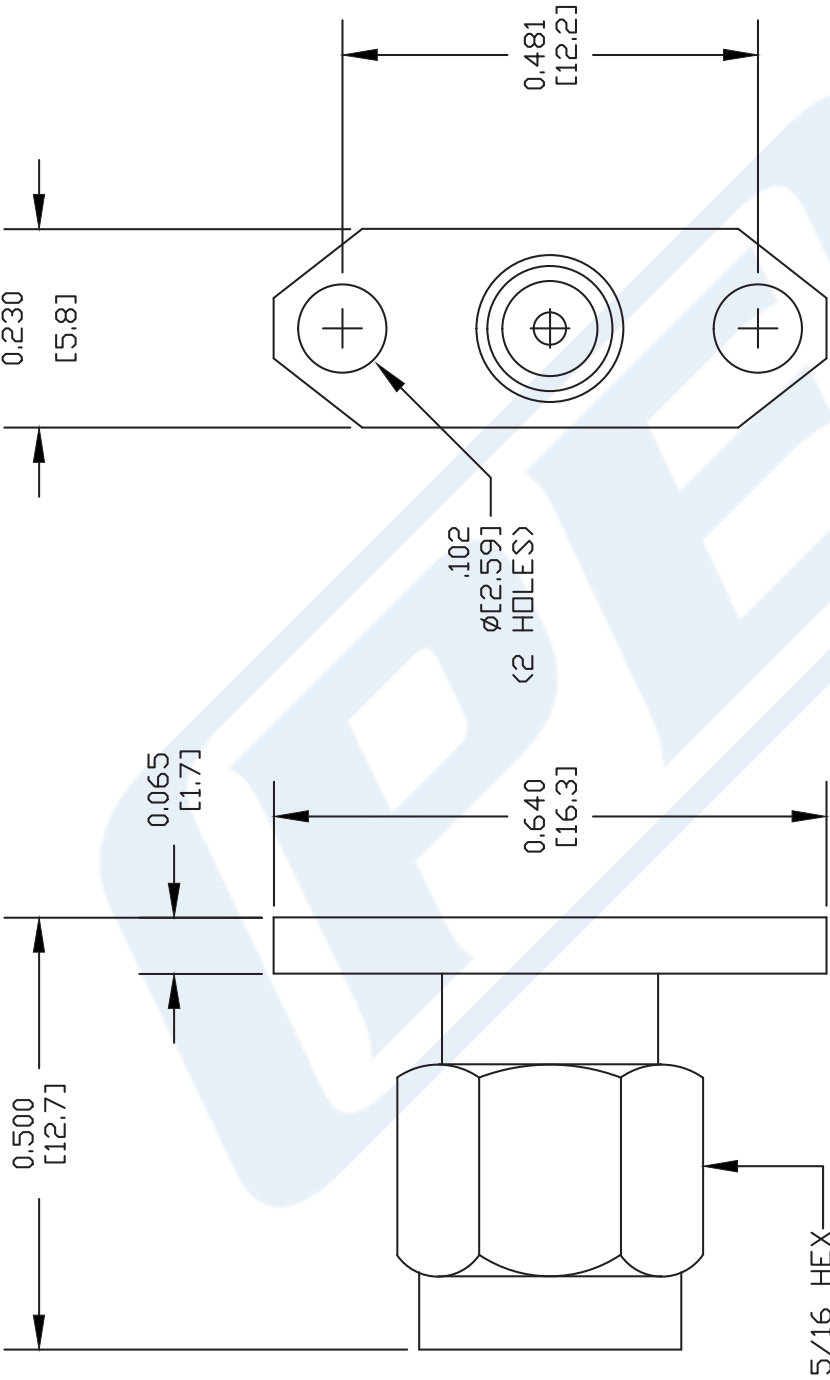

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].
 4. FITS MIL-C-17 AND EQUIVALENT CABLES.

DWG TITLE

PE44029

FSCM NO. 53919

SIZE A

SCALE N/A

CAD FILE 062002

127



Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com