



## 75 Ohm MCX Jack Right Angle Connector Solder Attachment Thru Hole PCB, .200 inch x .055 inch Hole Spacing

### RF Connectors Technical Data Sheet

PE44304

#### Configuration

- MCX Jack Connector
- MIL-C-39012
- 75 Ohms
- Right Angle Body Geometry
- Thru Hole Interface Type
- Solder Attachment

#### Features

- Max. Operating Frequency 6 GHz
- Gold over Nickel Plated Beryllium Copper Contact
- 30  $\mu$ m minimum contact plating

#### Applications

- General Purpose Test
- PCB Applications

#### Description

Pasternack's PE44304 75 ohm MCX jack right angle connector with solder attachment for thru hole PCB (.200 inch x .055 inch hole spacing) is part of our full line of RF components available for same-day shipping. Our MCX jack connector operates up to a maximum frequency of 6 GHz. Its right angle body geometry allows for easier connections in tight spaces.

Our 75 ohm MCX jack right angle connector PE44304 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
Operating Voltage (AC)			335	Vrms
Dielectric Withstanding Voltage (AC)			1,000	Vrms
High Potential Voltage at 4 and 7 MHz			600	Vrms
Corona Discharge at 70,000 feet			250	Vrms
Insulation Resistance	1,000			MOhms

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm MCX Jack Right Angle Connector Solder Attachment Thru Hole PCB, .200 inch x .055 inch Hole Spacing PE44304](#)



75 Ohm MCX Jack Right Angle Connector Solder Attachment  
Thru Hole PCB, .200 inch x .055 inch Hole Spacing

RF Connectors Technical Data Sheet

PE44304

**Mechanical Specifications**

**Size**

Length	0.375 in [9.53 mm]
Width/Dia.	0.236 in [5.99 mm]
Height	0.368 in [9.35 mm]
Weight	0.005 lbs [2.27 g]
Mating Cycles	500 Cycles

**Material Specifications**

Description	Material	Plating
Contact	Beryllium Copper	Gold over Nickel 30 µin minimum
Insulation	PTFE	
Body	Brass	Gold over Nickel 10 µin minimum

**Environmental Specifications**

**Temperature**

Operating Range	-65 to +165 deg C
Shock	MIL-STD-202, Method 213, Condition B
Vibration	MIL-STD-202, Method 204, Condition B
Thermal Shock	MIL-STD-202, Method 107, Condition F
Salt Spray	MIL-STD-202, Method 101, Condition B

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm MCX Jack Right Angle Connector Solder Attachment Thru Hole PCB, .200 inch x .055 inch Hole Spacing PE44304](#)



## 75 Ohm MCX Jack Right Angle Connector Solder Attachment Thru Hole PCB, .200 inch x .055 inch Hole Spacing

### RF Connectors Technical Data Sheet

PE44304

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

75 Ohm MCX Jack Right Angle Connector Solder Attachment Thru Hole PCB, .200 inch x .055 inch Hole Spacing from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm MCX Jack Right Angle Connector Solder Attachment Thru Hole PCB, .200 inch x .055 inch Hole Spacing PE44304](#)

URL: <https://www.pasternack.com/mcx-jack-standard-thru-hole-pcb-connector-pe44304-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE44304 CAD Drawing

75 Ohm MCX Jack Right Angle Connector Solder Attachment  
Thru Hole PCB, .200 inch x .055 inch Hole Spacing

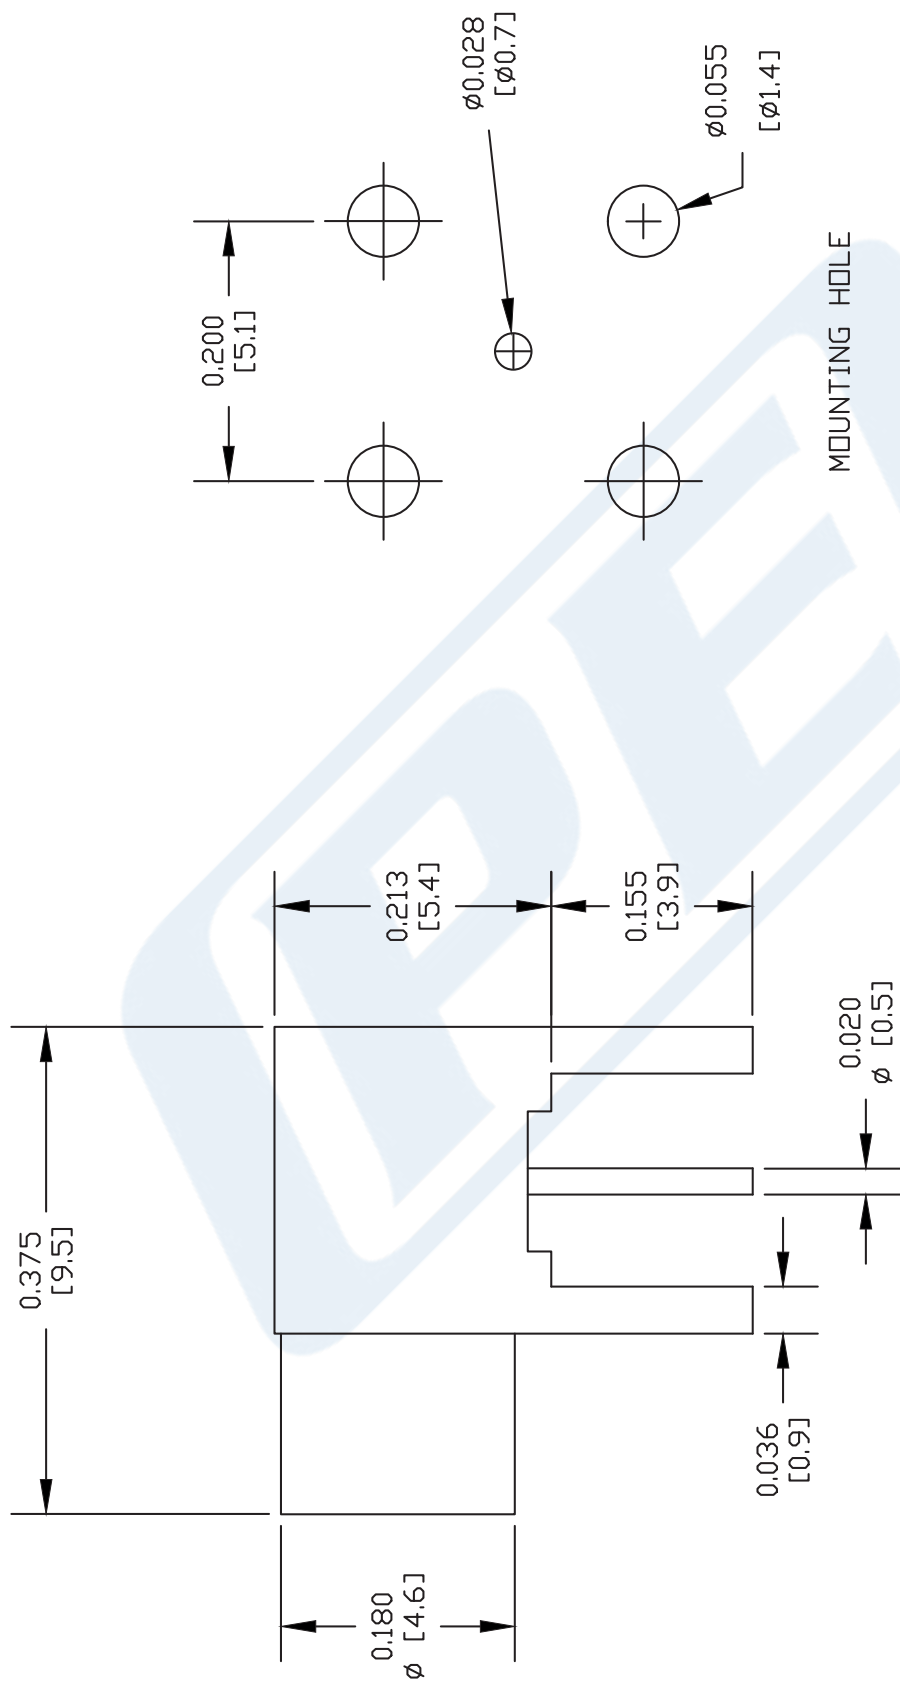

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].  
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

DWG TITLE  
**PE44304**

FSCM NO. 53919

**PE PASTERNAK®**  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com