

SSMA Female Connector Solder Attachment 4 Hole Flange Mount Pin Terminal, .232 inch Hole Spacing



RF Connectors Technical Data Sheet

PE44434

Configuration

- SSMA Female Connector
- MIL-STD-348
- 50 Ohms
- Straight Body Geometry

Features

• Gold Plated Contact

Applications

- General Purpose Test
- Rack and Panel Mount Applications

• Pin Interface Type

Solder Attachment

Contact plating according to MIL-G-45204

• 4 Hole Flange

Description

Pasternack's PE44434 SSMA female connector solder attachment 4 hole flange mount pin terminal, .232 inch hole spacing is part of our full line of RF components available for same-day shipping. This SSMA 4 hole flange connector allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Our SSMA female 4 hole flange connector PE44434 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable connector assemblies for you and ship same-day.

Mechanical Specifications

Size	
Length	0.875 in [22.23 m
Width/Dia.	0.375 in [9.53 mr
Height	0.375 in [9.53 mr
Weight	0.005 lbs [2.27 g]


Material Specifications

Description	Material	Plating
Contact		Gold MIL-G-45204
Insulation	PTFE	
Body	Stainless Steel	Gold MIL-G-45204

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SSMA Female Connector Solder Attachment 4 Hole Flange Mount Pin Terminal, .232 inch Hole Spacing PE44434

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com





SSMA Female Connector Solder Attachment 4 Hole Flange Mount Pin Terminal, .232 inch Hole Spacing

RF Connectors Technical Data Sheet

PASTERNACK

PE44434

Environmental Specifications Temperature

Operating Range

-65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

SSMA Female Connector Solder Attachment 4 Hole Flange Mount Pin Terminal, .232 inch Hole Spacing from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SSMA Female Connector Solder Attachment 4 Hole Flange Mount Pin Terminal, .232 inch Hole Spacing PE44434

URL: https://www.pasternack.com/ssma-female-standard-pin-terminal-connector-pe44434-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451 Sales@Pasternack.com • Techsupport@Pasternack.com



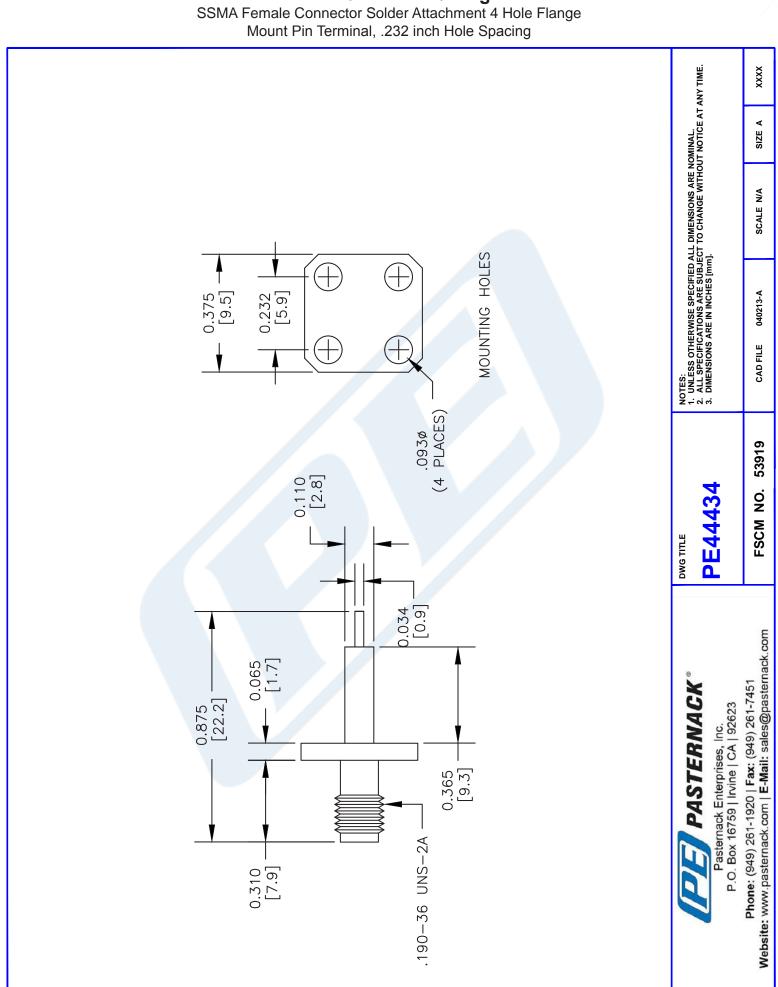

PE44434 CAD Drawing

3