



Mini SMP Male Connector Solder Attachment End Launch PCB

RF Connectors Technical Data Sheet

PE44490

Configuration

- Mini SMP Male Connector
- MIL-STD-348A
- 50 Ohms
- Straight Body Geometry
- End Launch Interface Type
- Solder Attachment

Features

- Max. Operating Frequency 65 GHz
- Gold Plated Beryllium Copper Contact
- Blind Mate Connector

Applications

- General Purpose Test
- Space Saving for PCB Applications

Description

Pasternack's PE44490 Mini SMP male connector with solder attachment for end launch PCB is part of our full line of RF components available for same-day shipping. Our Mini SMP male connector operates up to a maximum frequency of 65 GHz. The Pasternack blind mate connector is ideal for applications where direct visual or tactile access to the connection point is not possible, for example, when two circuit boards need to be mated.

Our Mini SMP male connector PE44490 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		65	GHz
Operating Voltage (AC)			325	Vrms
Inner Conductor DC Resistance			6	mOhms
Outer Conductor DC Resistance			2	mOhms
Insulation Resistance	5,000			MOhms

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 6	6 to 18	18 to 26.5			GHz
VSWR, Max	1.11:1	1.26:1	1.5:1			

Electrical Specification Notes:

Insertion loss = $0.1 \times \sqrt{f(\text{GHz})}$ dB max up to 18 GHz.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Mini SMP Male Connector Solder Attachment End Launch PCB PE44490](#)



Mini SMP Male Connector Solder Attachment End Launch PCB

RF Connectors Technical Data Sheet

PE44490

Mechanical Specifications

Size

Length 0.27 in [6.86 mm]

Width/Dia. 0.16 in [4.06 mm]

Weight 0.003 lbs [1.36 g]

Mating Cycles 100 Cycles

Material Specifications

Description	Material	Plating
Contact	Beryllium Copper	Gold
Insulation	PTFE	
Body	Brass	Gold

Environmental Specifications

Temperature

Operating Range -55 to +155 deg C

Humidity MIL-STD-202, Method 106

Shock MIL-STD-202, Method 213, Condition A

Vibration MIL-STD-202, Method 204, Condition A

Thermal Shock MIL-STD-202, Method 107, Condition B

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Mini SMP Male Connector Solder Attachment End Launch PCB PE44490](#)



Mini SMP Male Connector Solder Attachment End Launch PCB

RF Connectors Technical Data Sheet

PE44490

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Mini SMP Male Connector Solder Attachment End Launch PCB from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Mini SMP Male Connector Solder Attachment End Launch PCB PE44490](#)

URL: <https://www.pasternack.com/mini-smp-male-standard-surface-mount-end-launch-connector-pe44490-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE44490 CAD Drawing

Mini SMP Male Connector Solder Attachment End Launch PCB

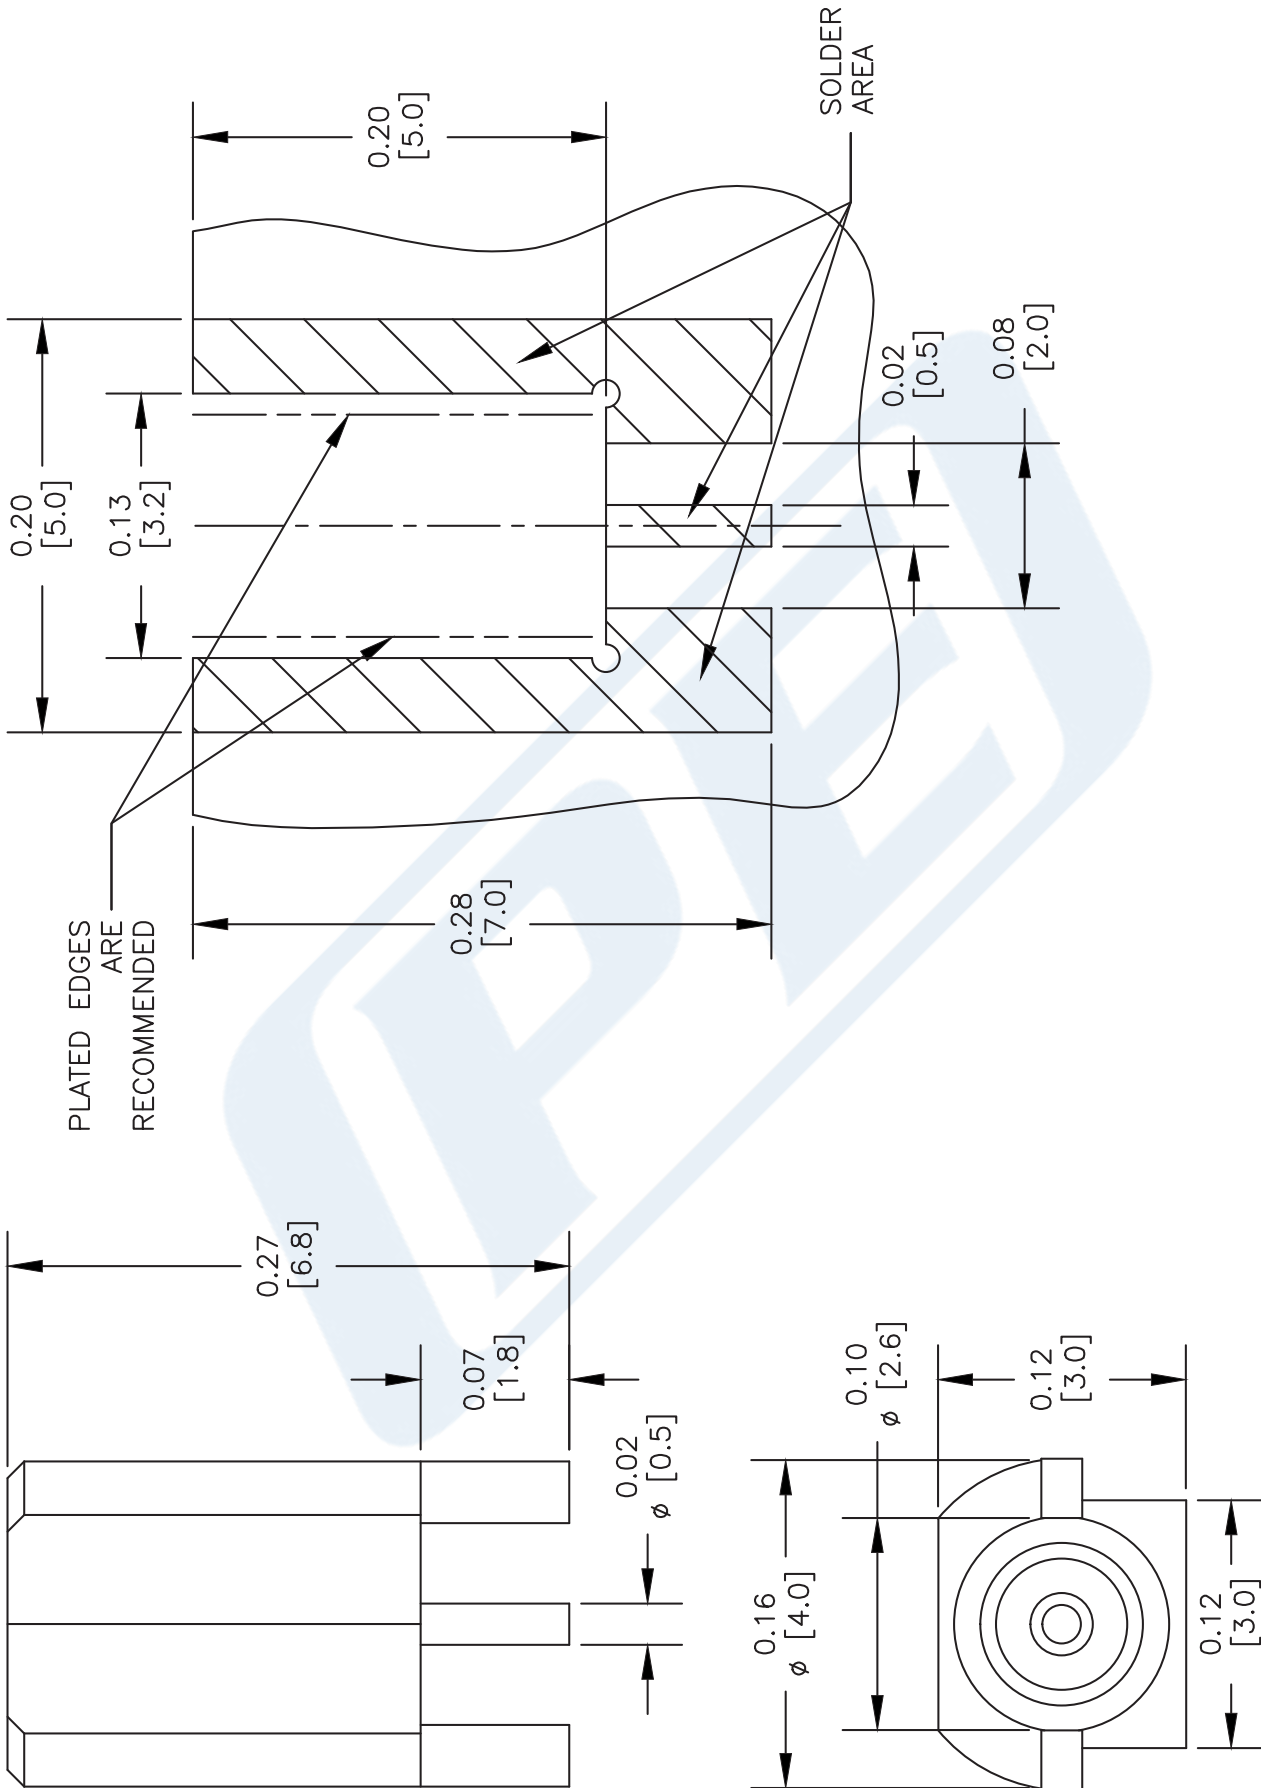

DWG TITLE

PE44490

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

FSCM NO. 53919

SIZE A

SCALE N/A

CAD FILE 080212-B

2233

PE PASTERNAK®

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com