



75 Ohm RCA Male Connector Compression Attachment
for PE-B159, 1855A, Mini 59, Gold Plated

RF Connectors Technical Data Sheet

PE44575

Configuration

- RCA Male Connector
- 75 Ohms
- Straight Body Geometry
- PE-B159, 1855A, Mini 59 Interface Type
- Compression Attachment

Features

- Gold Plated Brass Contact

Applications

- General Purpose Test
- Custom Cable Assemblies
- CATV

Description

Pasternack's PE44575 75 ohm RCA male connector with compression attachment for PE-B159, 1855A and Mini 59 is part of our full line of RF components available for same-day shipping.

their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assemblies for you and ship same-day.

Mechanical Specifications

Size
Length 1.67 in [42.42 mm]

Material Specifications

Description	Material	Plating
Contact	Brass	Gold
Insulation	POM	
Body	Brass	Gold

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price,
75 Ohm RCA Male Connector Compression Attachment for PE-B159, 1855A, Mini 59, Gold
Plated PE44575



75 Ohm RCA Male Connector Compression Attachment for PE-B159, 1855A, Mini 59, Gold Plated

RF Connectors Technical Data Sheet

PE44575

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data


75 Ohm RCA Male Connector Compression Attachment for PE-B159, 1855A, Mini 59, Gold Plated from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, [75 Ohm RCA Male Connector Compression Attachment for PE-B159, 1855A, Mini 59, Gold Plated PE44575](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE44575 CAD Drawing

75 Ohm RCA Male Connector Compression Attachment
for PE-B159, 1855A, Mini 59, Gold Plated

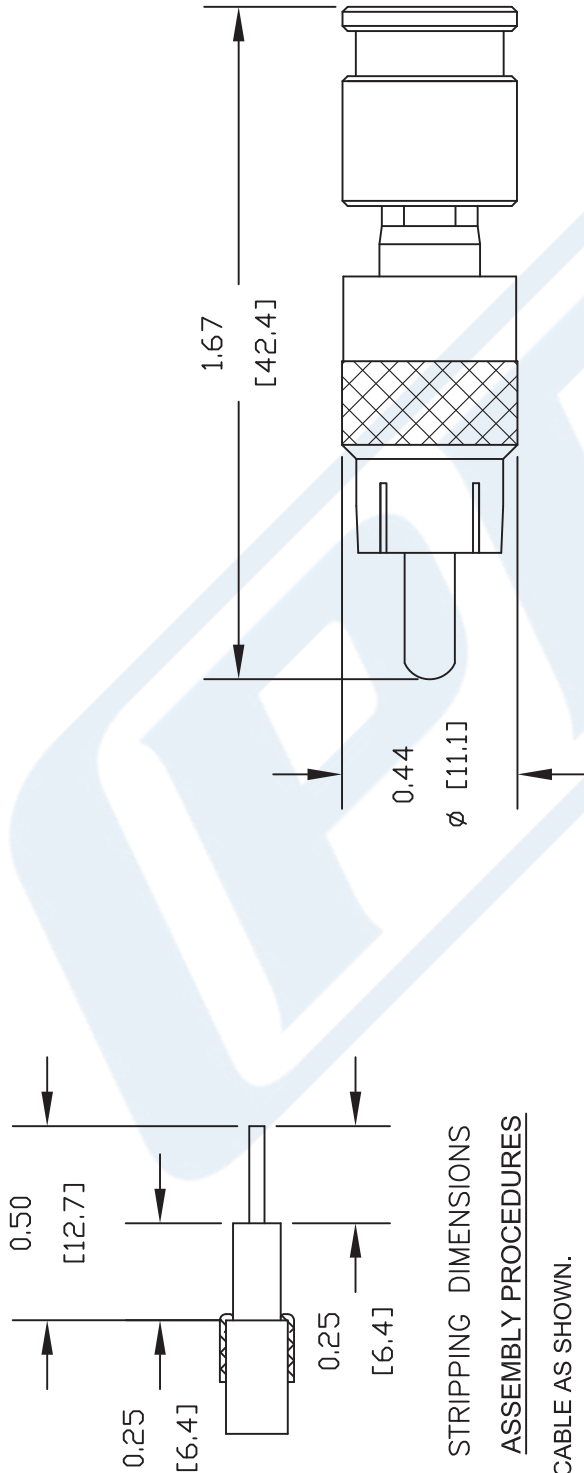

**STRIPPING DIMENSIONS
ASSEMBLY PROCEDURES**

1. STRIP CABLE AS SHOWN.
2. PUSH BRAID BACK AGAINST CABLE JACKET EVENLY.
3. INSERT CABLE INTO BODY WHILE TWISTING CONNECTOR SLIGHTLY.
4. INSERT ASSEMBLY INTO COMPRESSION TOOL & COMPRESS USING A PE5012.

DWG TITLE
PE44575

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

PE PASTERNAK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

REV. C	FSCM NO. 53919	CAD FILE 102511	SCALE N/A	SIZE A	2233
--------	----------------	-----------------	-----------	--------	------