

PE44583

RCA Male
PE-B159
Crimp/Solder
Precision
Straight

75 Ohms

1.525 in [38.74 mm]
0.436 in [11.07 mm]
0.001 lbs [0.45 g]

RCA Male
Brass, Gold
Brass, Gold
Delrin

12/19/2011



PASTERNAK ENTERPRISES, INC.
UL
REGISTERED FIRM
CERTIFICATE NO. 1009457 Q4002
9001 • 2004



75 Ohm RCA Male Precision Connector Crimp/ Solder Attachment for PE-B159

TECHNICAL DATA SHEET

PE44583

Plotted and Other Data

Notes:

- Values at +25 °C, sea level

75 Ohm RCA Male Precision Connector Crimp/Solder Attachment for PE-B159 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm RCA Male Precision Connector Crimp/Solder Attachment for PE-B159 PE44583](#)

URL: <http://www.pasternack.com/rca-male-standard-pe-b159-connector-pe44583-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE44583 CAD Drawing

75 Ohm RCA Male Precision Connector Crimp/Solder Attachment for PE-B159

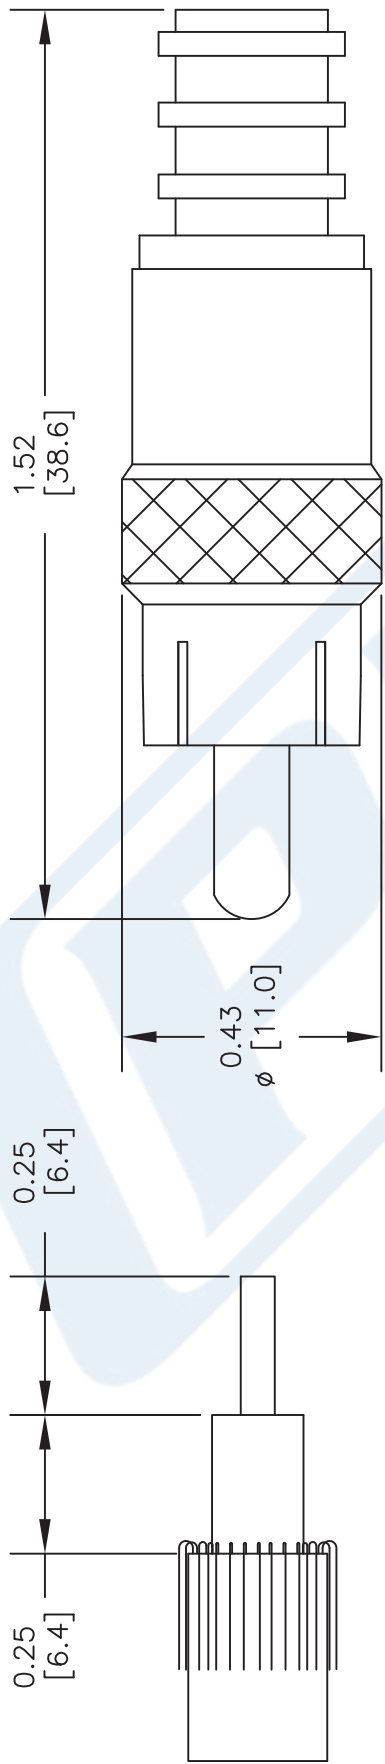

STRIPPING DIMENSIONS

ASSEMBLY PROCEDURES

1. STRIP CABLE AS SHOWN [FOIL SHOULD REMAIN ON DIELECTRIC].
2. FOLD BRAID BACK OVER JACKET.
3. INSERT PREPARED CABLE INTO CONNECTOR. PUSH CABLE FORWARD INTO CONNECTOR WHILE SLIGHTLY TWISTING CONNECTOR AND CRIMP.

CRIMP SIZE REQUIRED

FERRULE: .255" HEX CRIMP TOOL

PE PASTERNAK®
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE
PE44583

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

FSCM NO. 53919

CAD FILE 050514 SCALE N/A SIZE A 2233