



BNC Female Connector Field Replaceable
Attachment 4 Hole Flange Slotted Contact Terminal,
1.24 Sq. Flange Watt Meter Connector

TECHNICAL DATA SHEET

PE44720

BNC Female Connector Field Replaceable Attachment 4 Hole Flange Slotted Contact Terminal, 1.24 Sq. Flange Watt Meter Connector

Configuration

Connector	BNC Female
Connector Specification	MIL-STD-348
Connector Interface Type	Slotted Contact
Cable Attachment Method (Shield/Contact)	Field Replaceable
Body Style	Straight
Mount Method	4 Hole Flange

Electrical Specifications

Frequency Range, GHz	DC to 4
Impedance, Ohms	50
Maximum Operating Voltage, Volts	500
Dielectric Withstanding Voltage, Vrms	1,500

Mechanical Specifications

Temperature

Operating Range, deg C	-65 to +165
------------------------	-------------

Size

Length, in [mm]	1.165 [29.59]
Width/Dia., in [mm]	1.24 [31.50]
Height, in [mm]	1.24 [31.5]
Weight, lbs [g]	0.066 [29.94]

Connector

Type	BNC Female
Contact Material and Plating	Silver
Body Material and Plating	Brass, Nickel
Dielectric Type	PTFE

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Female Connector Field Replaceable Attachment 4 Hole Flange Slotted Contact Terminal, 1.24 Sq. Flange Watt Meter Connector PE44720](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



BNC Female Connector Field Replaceable
Attachment 4 Hole Flange Slotted Contact Terminal,
1.24 Sq. Flange Watt Meter Connector

TECHNICAL DATA SHEET

PE44720

Plotted and Other Data

Notes:

Values at 25 °C, sea level

BNC Female Connector Field Replaceable Attachment 4 Hole Flange Slotted Contact Terminal, 1.24 Sq. Flange Watt Meter Connector from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Female Connector Field Replaceable Attachment 4 Hole Flange Slotted Contact Terminal, 1.24 Sq. Flange Watt Meter Connector PE44720](http://www.pasternack.com/bnc-female-standard-slotted-contact-terminal-connector-pe44720-p.aspx)

URL: <http://www.pasternack.com/bnc-female-standard-slotted-contact-terminal-connector-pe44720-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE44720 CAD Drawing

BNC Female Connector Field Replaceable Attachment 4 Hole Flange
Slotted Contact Terminal, 1.24 Sq. Flange Watt Meter Connector

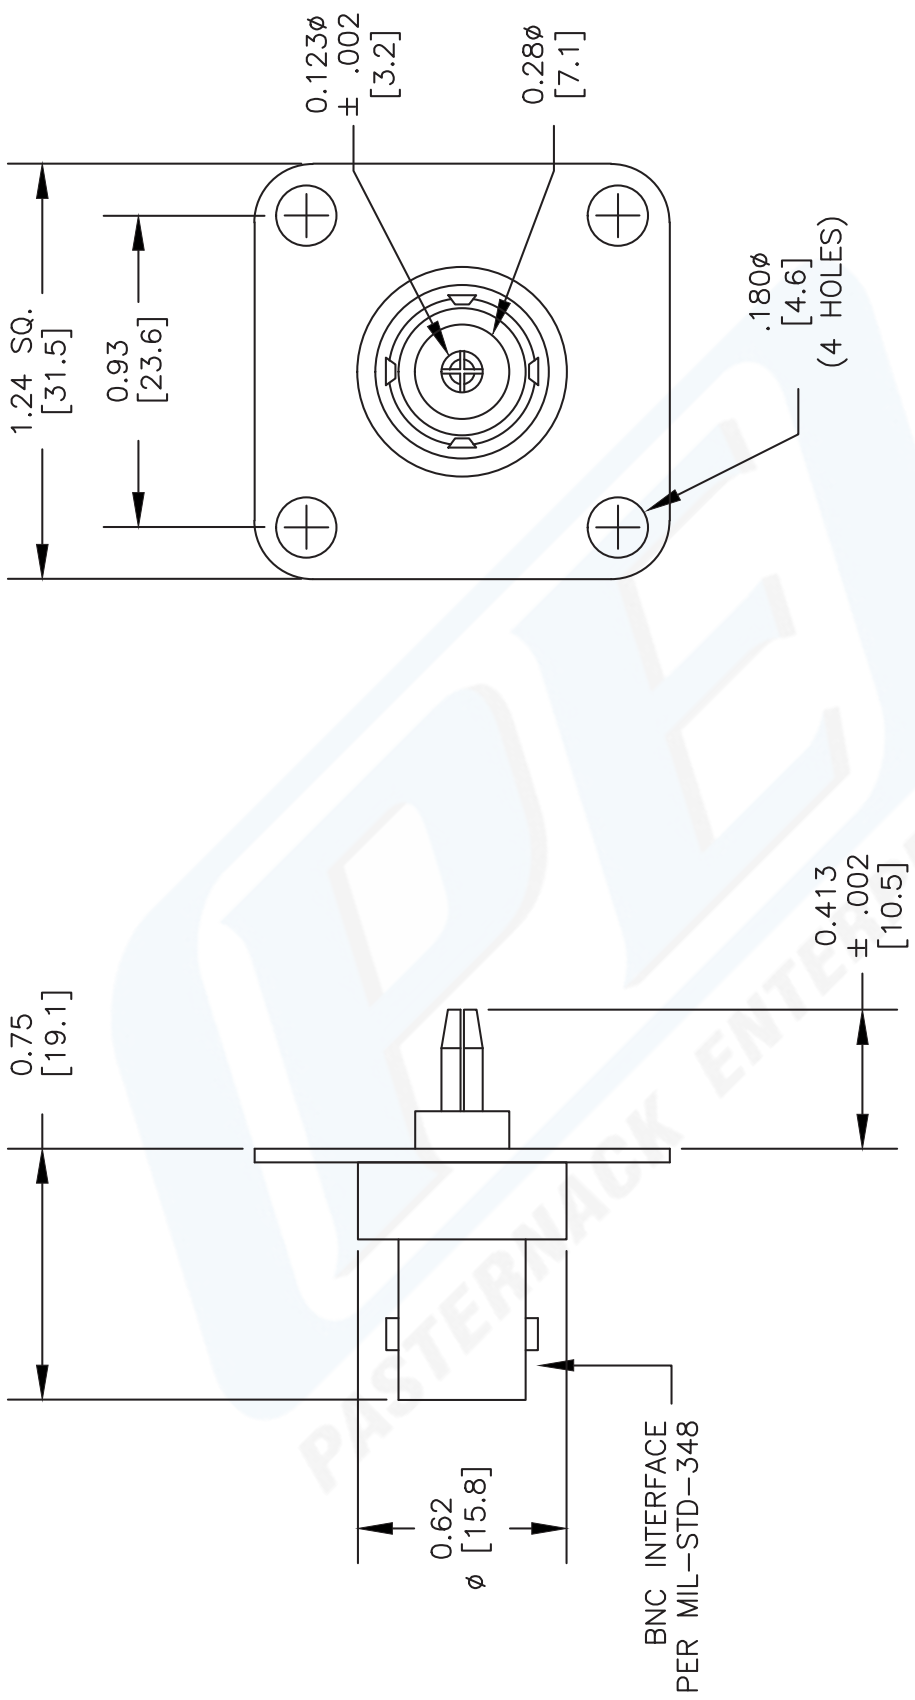

- NOTES:
- 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 - 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 - 3. DIMENSIONS ARE IN INCHES [mm].
 - 4. FITS MIL-C-17 AND EQUIVALENT CABLES.

DWG TITLE
PE44720

REV. -	FSCM NO. 53919	CAD FILE 020712	SCALE N/A	SIZE A	2233
--------	----------------	-----------------	-----------	--------	------



PASTERNAK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com