SMP Male Full Detent Connector Solder Attachment Thread-In Mount Pin Terminal .065 inch Pin Length Pre-Tinned

TECHNICAL DATA SHEET	PE44963

Configuration

Connector	SMP Male, Full Detent
Connector Specification	MIL-STD-348
Connector Interface Type	Pin
Attachment Method (Shield/Contact)	Solder
Body Style	Straight
Mount Method	Thread-In

Electrical Specifications

Impedance	50 Ohms

Mechanical Specifications

Temperature

Operating Range	-55 to +125 deg C

Size

Length	0.297 in [7.54 mm]
Width/Dia.	0.19 in [4.83 mm]
Weight	0.082 lbs [37.19 g]

Connector

Type	SMP Male
Contact Material and Plating	Beryllium Copper, Gold
Contact Plating Specification	MIL-G-45204
Body Material and Plating	Passivated Stainless Steel
Body Plating Specification	AMS-QQ-P-35
Dielectric Type	PTFE

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMP Male Full Detent Connector Solder Attachment Thread-In Mount Pin Terminal .065 inch Pin Length Pre-Tinned PE44963

SMP Male Full Detent Connector Solder Attachment Thread-In Mount Pin Terminal .065 inch Pin Length Pre-Tinned

TECHNICAL DATA SHEET   PE44963
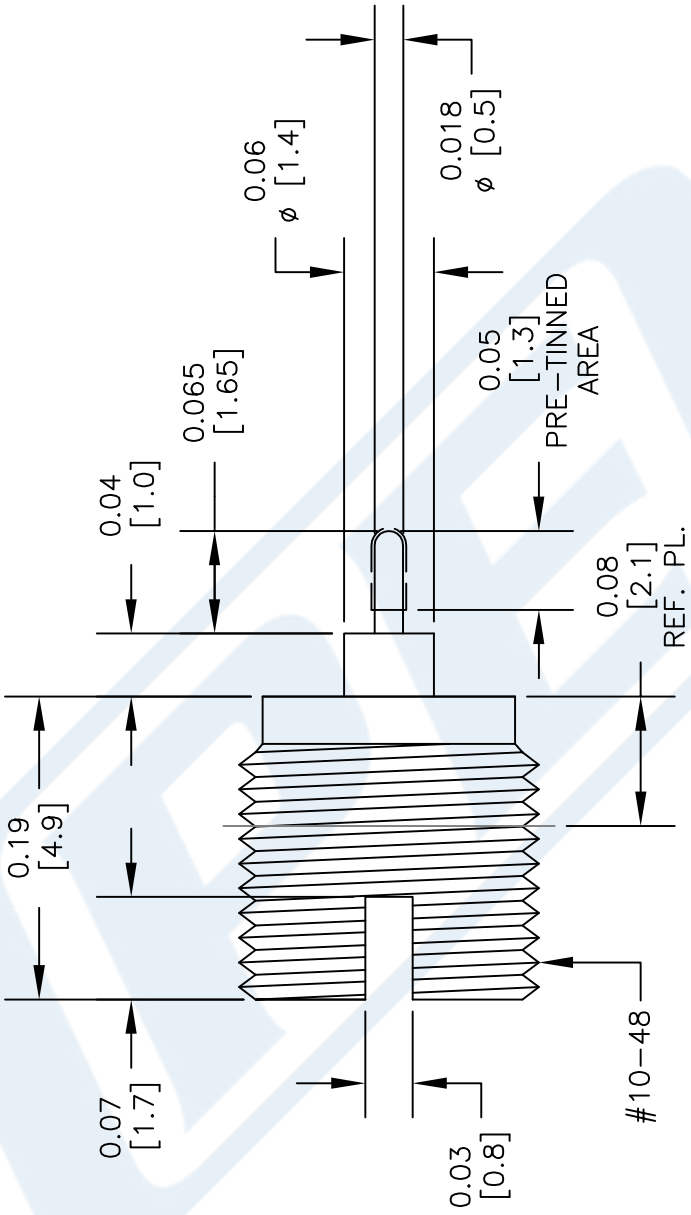
Plotted and Other Data
Notes:
- Values at +25 °C, sea level

SMP Male Full Detent Connector Solder Attachment Thread-In Mount Pin Terminal .065 inch Pin Length Pre-Tinned from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMP Male Full Detent Connector Solder Attachment Thread-In Mount Pin Terminal .065 inch Pin Length Pre-Tinned PE44963

URL: http://www.pasternack.com/smp-male-standard-pin-terminal-connector-pe44963-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2014 Pasternack Enterprises All Rights Reserved   PE44963 REV 1.0   2

PE44963 CAD Drawing

SMP Male Full Detent Connector Solder Attachment Thread-
In Mount Pin Terminal .065 inch Pin Length Pre-Tinned

0.06
∅ [1.4]

0.018
∅ [0.5]

0.065
[1.65]

0.05
[1.3]
PRE-TINNED
AREA

0.04
[1.0]

0.08
[2.1]
REF. PL.

0.19
[4.9]

0.07
[1.7]

0.03
[0.8]

#10-48

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE	FSCM NO. 53919	CAD FILE 022714	SCALE N/A	SIZE A	150
PE44963					

PE44963 REV 1.0