


Product Features

- GSM Freq Range
- 900-960 MHz, 1/4 Wave
- 50W power handling
- Unity Gain, Omni Radiation Pattern
- Right Angle 70mm Fiberglass Radome

Specifications ⁽¹⁾

Parameter	Value	Units	Description
Minimum Frequency	900	MHz	
Maximum Frequency	960	MHz	
Impedance	50	Ohms	
Gain	Unity	dBi	Max Gain
Polarization	Omni		
Max Input Pwr	50	W	Watts (Max) at 900MHz
Maximum VSWR	<1.5	ratio	@ 50 MHz BW Fc range
Length	70	mm	2.75 inches
Diameter	8	mm	.3 inch
Connector Type	SMA (m) Right Angle		SMA (male) Right Angle
Water Proof	IP65		
Wip			Silver Copper

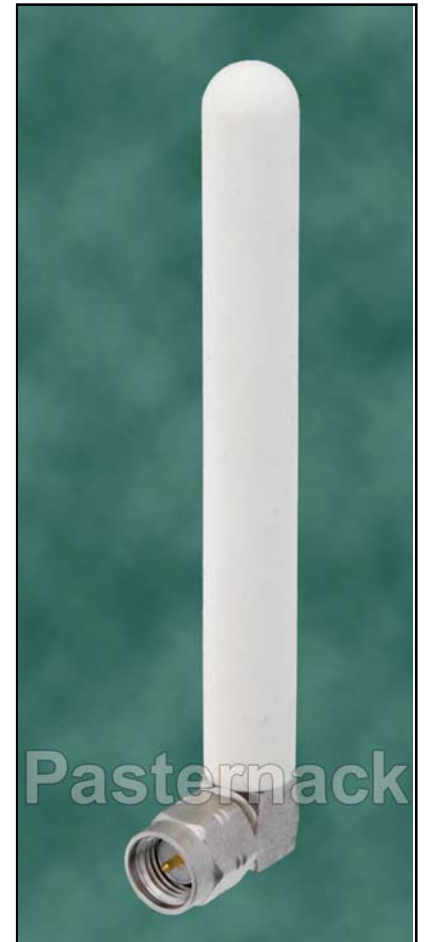

Ordering Information

Part Number	Description
PE51056	900-960 MHz Unity Gain Omni Antenna with SMA Male Right Angle

(1) Pasternack reserves the right to change specifications or information without notice.

(2) All specification values are "typical"