



GPS Passive Antenna Operates From
1.5724 GHz to 1.5784 GHz With a Typical 0 dBi Gain
SMA Male Input Connector on 16 ft. of RG174

TECHNICAL DATA SHEET

PE51066-2

Configuration

Design	GPS Passive
Frequency Range	1.5724 to 1.5784 GHz
Polarization	RHCP
Cable Type	RG174A/U
Cable Length	192 in [487.68 cm]
Interface 1	SMA Male
Number of Output Ports	1

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Impedance		50		Ohms
Input VSWR			1.5:1	

Mechanical Specifications

Radome Material	Plastic
Size	
Length	1.694 in [43.03 mm]
Width	1.3 in [33.02 mm]
Height	0.552 in [14.02 mm]
Weight	0.26 lbs [117.93 g]

Environmental Specifications

Temperature	
Operating Range	-40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [GPS Passive Antenna Operates From 1.5724 GHz to 1.5784 GHz With a Typical 0 dBi Gain SMA Male Input Connector on 16 ft. of RG174 Rated PE51066-2](#)



GPS Passive Antenna Operates From
1.5724 GHz to 1.5784 GHz With a Typical 0 dBi Gain
SMA Male Input Connector on 16 ft. of RG174

TECHNICAL DATA SHEET

PE51066-2

GPS Passive Antenna Operates From 1.5724 GHz to 1.5784 GHz With a Typical 0 dBi Gain SMA Male Input Connector on 16 ft. of RG174 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, micro-wave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [GPS Passive Antenna Operates From 1.5724 GHz to 1.5784 GHz With a Typical 0 dBi Gain SMA Male Input Connector on 16 ft. of RG174 Rated PE51066-2](https://www.pasternack.com/single-antenna-1.5724-1.5784-ghz-0-dbi-gain-sma-pe51066-2-p.aspx)

URL: <https://www.pasternack.com/single-antenna-1.5724-1.5784-ghz-0-dbi-gain-sma-pe51066-2-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE51066-2 CAD Drawing

GPS Passive Antenna Operates From 1.5724 GHz to 1.5784 GHz With a
Typical 0 dBi Gain SMA Male Input Connector on 16 ft. of RG174

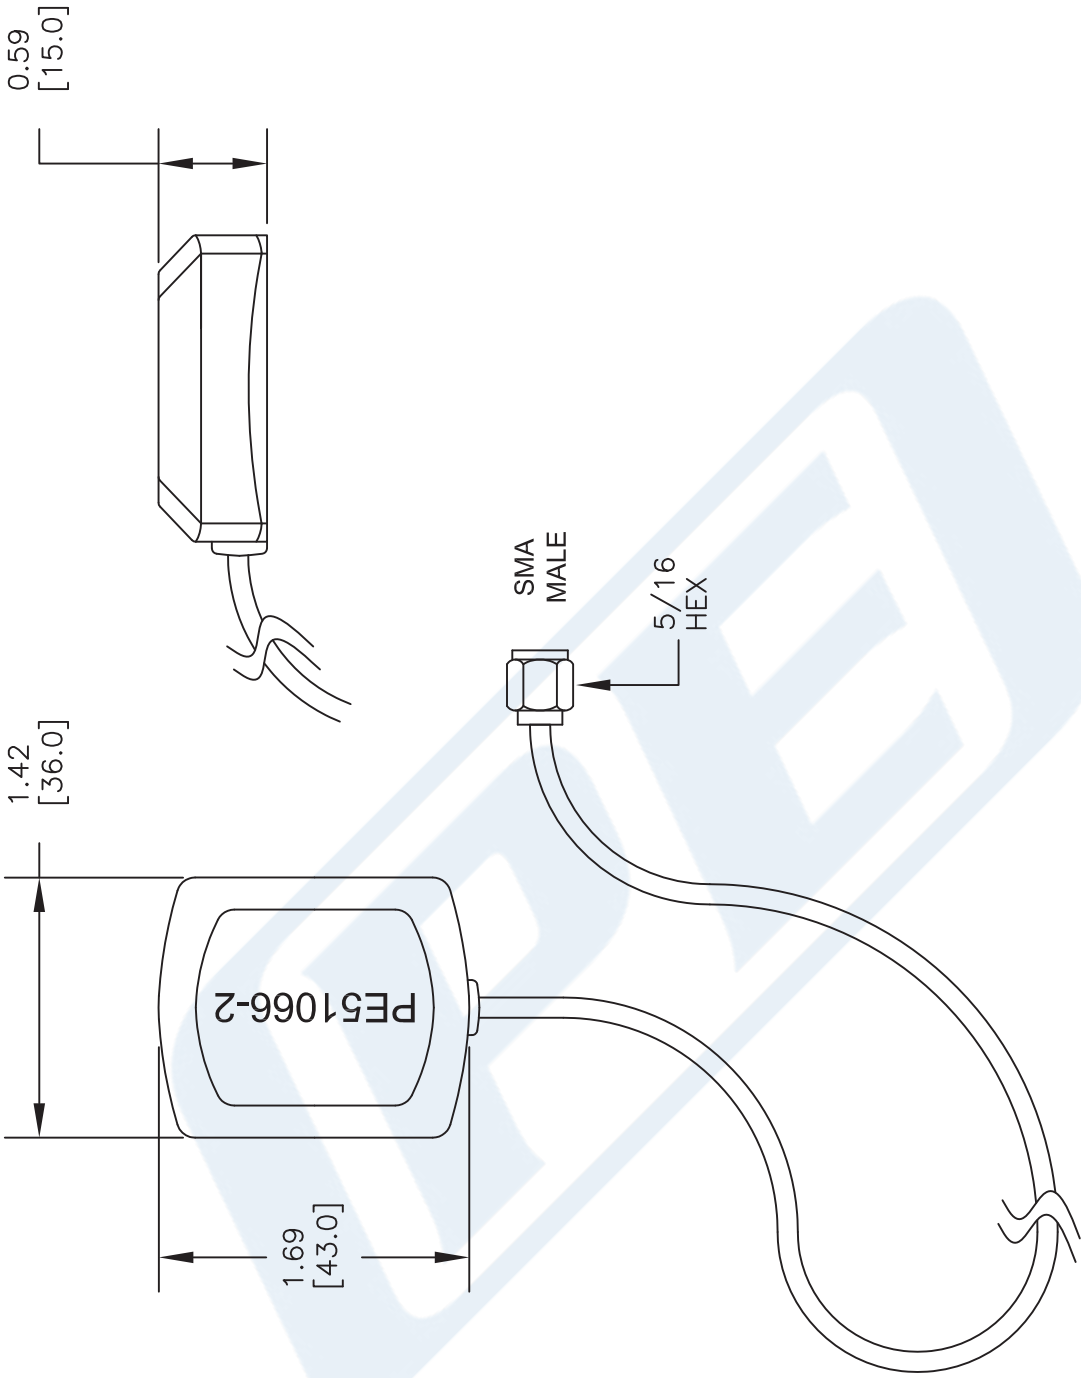

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.1
.XXX	±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE	
PE51066-2	
CAGE CODE	53919



PASTERNAK®
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

CAD FILE	101916	SCALE	N/A	SIZE	A	2233
----------	--------	-------	-----	------	---	------