


MATERIALS

BODY	PASSIVATED STAINLESS STEEL
CONTACT	GOLD PLATED
INSULATOR	PS

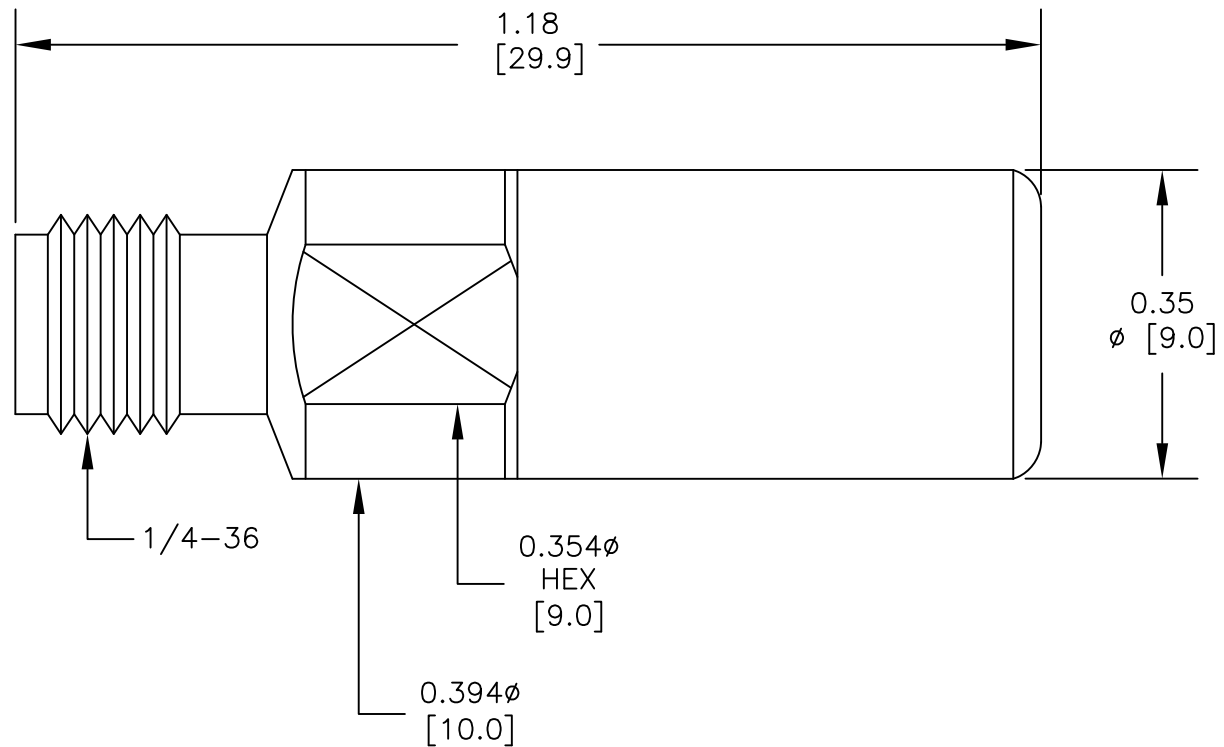

SPECIFICATIONS

FREQUENCY RANGE: DC TO 26.5 GHz

RETURN LOSS:

DC TO 4 GHz = 0.10 dB

4 GHz TO 26.5 GHz = 0.20dB



PASTERNAK ENTERPRISES, INC.

P.O BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com

COAXIAL & FIBER OPTICS

DWG TITLE

PE5500-2

DES. OPEN CIRCUIT, 3.5mm FEMALE

REV. A

FSCM NO. 53919

CAD FILE 012712

SCALE N/A

SIZE A

2233

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].