



## 2 Watt RF Load Up to 18 GHz With TNC Male Input Passivated Stainless Steel

### RF Terminations Technical Data Sheet

PE6089

#### Features

- DC to 18 GHz Frequency Range
- VSWR 1.25:1 Max
- Max Power 2 Watt (CW)
- TNC Male Coaxial Interface

#### Applications

- Wireless
- SatCom
- Radar Systems
- Test and Measurement
- Commercial and Military Communication

#### Description

Pasternack's PE6089 is an RF termination (also called RF load or dummy load) that operates from DC to 18 GHz and handles up to 2 Watt (CW). Our TNC termination / load has a male gender. PE6089 TNC load termination offers 1.25:1 max VSWR.

RF load / terminations are indispensable components in many RF, microwave and millimeter wave systems where signal reflection from unused ports can potentially damage the device or reduce the signal integrity. By using a terminator on an unused port with a matched load (dummy load), the incident energy will be absorbed with minimal reflection. These termination components are commonly used to terminate devices such as couplers, circulators, and switches. They are also widely used in measurement systems to ensure accurate results. Pasternack offers a huge selection of RF, microwave and millimeter wave terminations up to 65 GHz with excellent performance over the entire operating range and power handling capabilities up to 800 Watt (CW).

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
Impedance		50		Ohms
VSWR			1.25:1	
Input Power (CW) derated linearly to 1W at +125°C			2	Watts
Input Power (Peak) 5µs pulse, 0.05% duty cycle			250	Watts

#### Mechanical Specifications

<b>Size</b>	
Length	1.25 in [31.75 mm]
Width	0.625 in [15.88 mm]
Weight	0.082 lbs [37.19 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 Watt RF Load Up to 18 GHz With TNC Male Input Passivated Stainless Steel PE6089](#)



2 Watt RF Load Up to 18 GHz With TNC  
Male Input Passivated Stainless Steel

RF Terminations Technical Data Sheet

PE6089

**Configuration**

Connector	TNC Male
Connector Specification	MIL-C-39012
Hex Size	5/8 inch

**Material Specifications**

Description	Material	Plating
Connector 1 Contact	Beryllium Copper	Gold
Insulation	Teflon	
Body	Passivated Stainless Steel	
Coupling Nut	Passivated Stainless Steel	
Housing	Passivated Stainless Steel	

Mechanical Specification Notes:  
TNC connectors are mode-free up to 18 GHz.

**Environmental Specifications**

**Temperature**

Operating Range -65 to +125 deg C

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant  
REACH Compliant 12/17/2015

**Plotted and Other Data**

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 Watt RF Load Up to 18 GHz With TNC Male Input Passivated Stainless Steel PE6089](#)



## 2 Watt RF Load Up to 18 GHz With TNC Male Input Passivated Stainless Steel

### RF Terminations Technical Data Sheet

PE6089

2 Watt RF Load Up to 18 GHz With TNC Male Input Passivated Stainless Steel from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 Watt RF Load Up to 18 GHz With TNC Male Input Passivated Stainless Steel PE6089](http://www.pasternack.com/2-watts-tnc-male-rf-load-up-to-18-ghz-precision-pe6089-p.aspx)

URL: <http://www.pasternack.com/2-watts-tnc-male-rf-load-up-to-18-ghz-precision-pe6089-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE6089 CAD Drawing

2 Watt RF Load Up to 18 GHz With TNC Male Input Passivated Stainless Steel

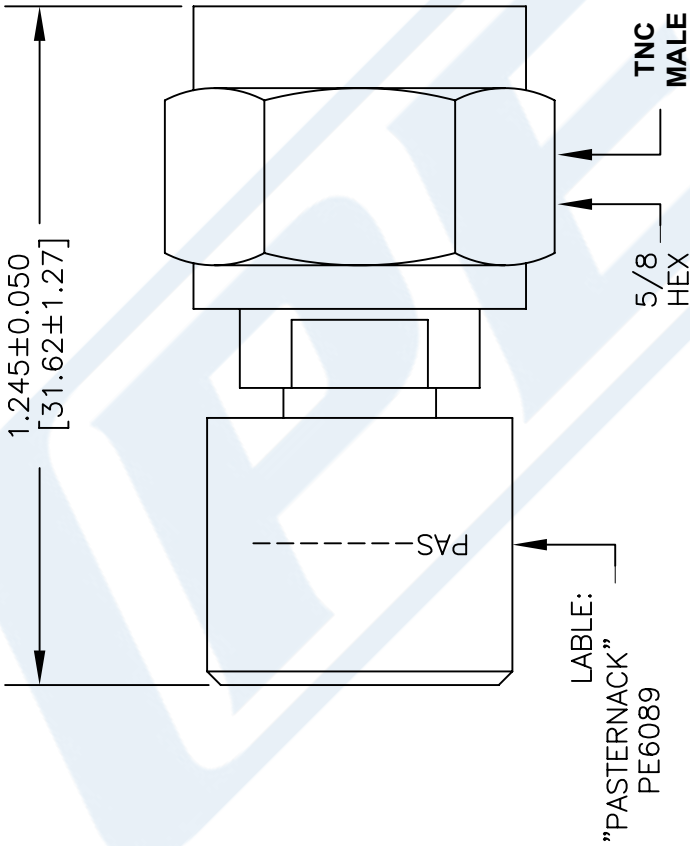

STANDARD TOLERANCES

DECIMAL

.XX ±0.01

.XXX ±0.005

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

PE

PASTERNAK®

THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.

P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

DWG TITLE  
**PE6089**

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 052616

SCALE N/A

SIZE A

3045