



Medium Power 50 Watts RF Load Up To 8 GHz With 7/16 DIN
Male Input Square Body Black Anodized Aluminum Heatsink

TECHNICAL DATA SHEET

PE6217

Configuration

Connector	7/16 DIN Male
Connector Specification	MIL-STD-348
Heat Sink	Black Anodized Aluminum Heatsink
Connection Method	Standard
Body Style	Straight

Electrical Specifications

Frequency Range, GHz	DC to 8
Impedance, Ohms	50
Maximum VSWR	1.6:1
Maximum Input Power, Watts	50
Peak Power, Watts	500

Frequency 1

Frequency, GHz	DC to 6
VSWR	1.3:1

Mechanical Specifications

Temperature

Operating Range, deg C	-65 to +125
Color	Black

Connector

Type	7/16 DIN Male
Inner Conductor Material and Plating	Brass, Tri-Metal
Outer Conductor Material and Plating	Brass, Silver
Hex Size, Inch	7/16
Body Material and Plating	Brass, Silver
Dielectric Type	PTFE

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Medium Power 50 Watts RF Load Up To 8 GHz With 7/16 DIN Male Input Square Body Black Anodized Aluminum Heatsink PE6217](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



Medium Power 50 Watts RF Load Up To 8 GHz With 7/16 DIN
Male Input Square Body Black Anodized Aluminum Heatsink

TECHNICAL DATA SHEET

PE6217

Plotted and Other Data

Notes:

Values at 25 °C, sea level

Medium Power 50 Watts RF Load Up To 8 GHz With 7/16 DIN Male Input Square Body Black Anodized Aluminum Heatsink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Medium Power 50 Watts RF Load Up To 8 GHz With 7/16 DIN Male Input Square Body Black Anodized Aluminum Heatsink PE6217](http://www.pasternack.com/50-watts-7-16-male-rf-load-up-to-8-ghz-pe6217-p.aspx)

URL: <http://www.pasternack.com/50-watts-7-16-male-rf-load-up-to-8-ghz-pe6217-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE6217 CAD Drawing

Medium Power 50 Watts RF Load Up To 8 GHz With 7/16 DIN
Male Input Square Body Black Anodized Aluminum Heatsink

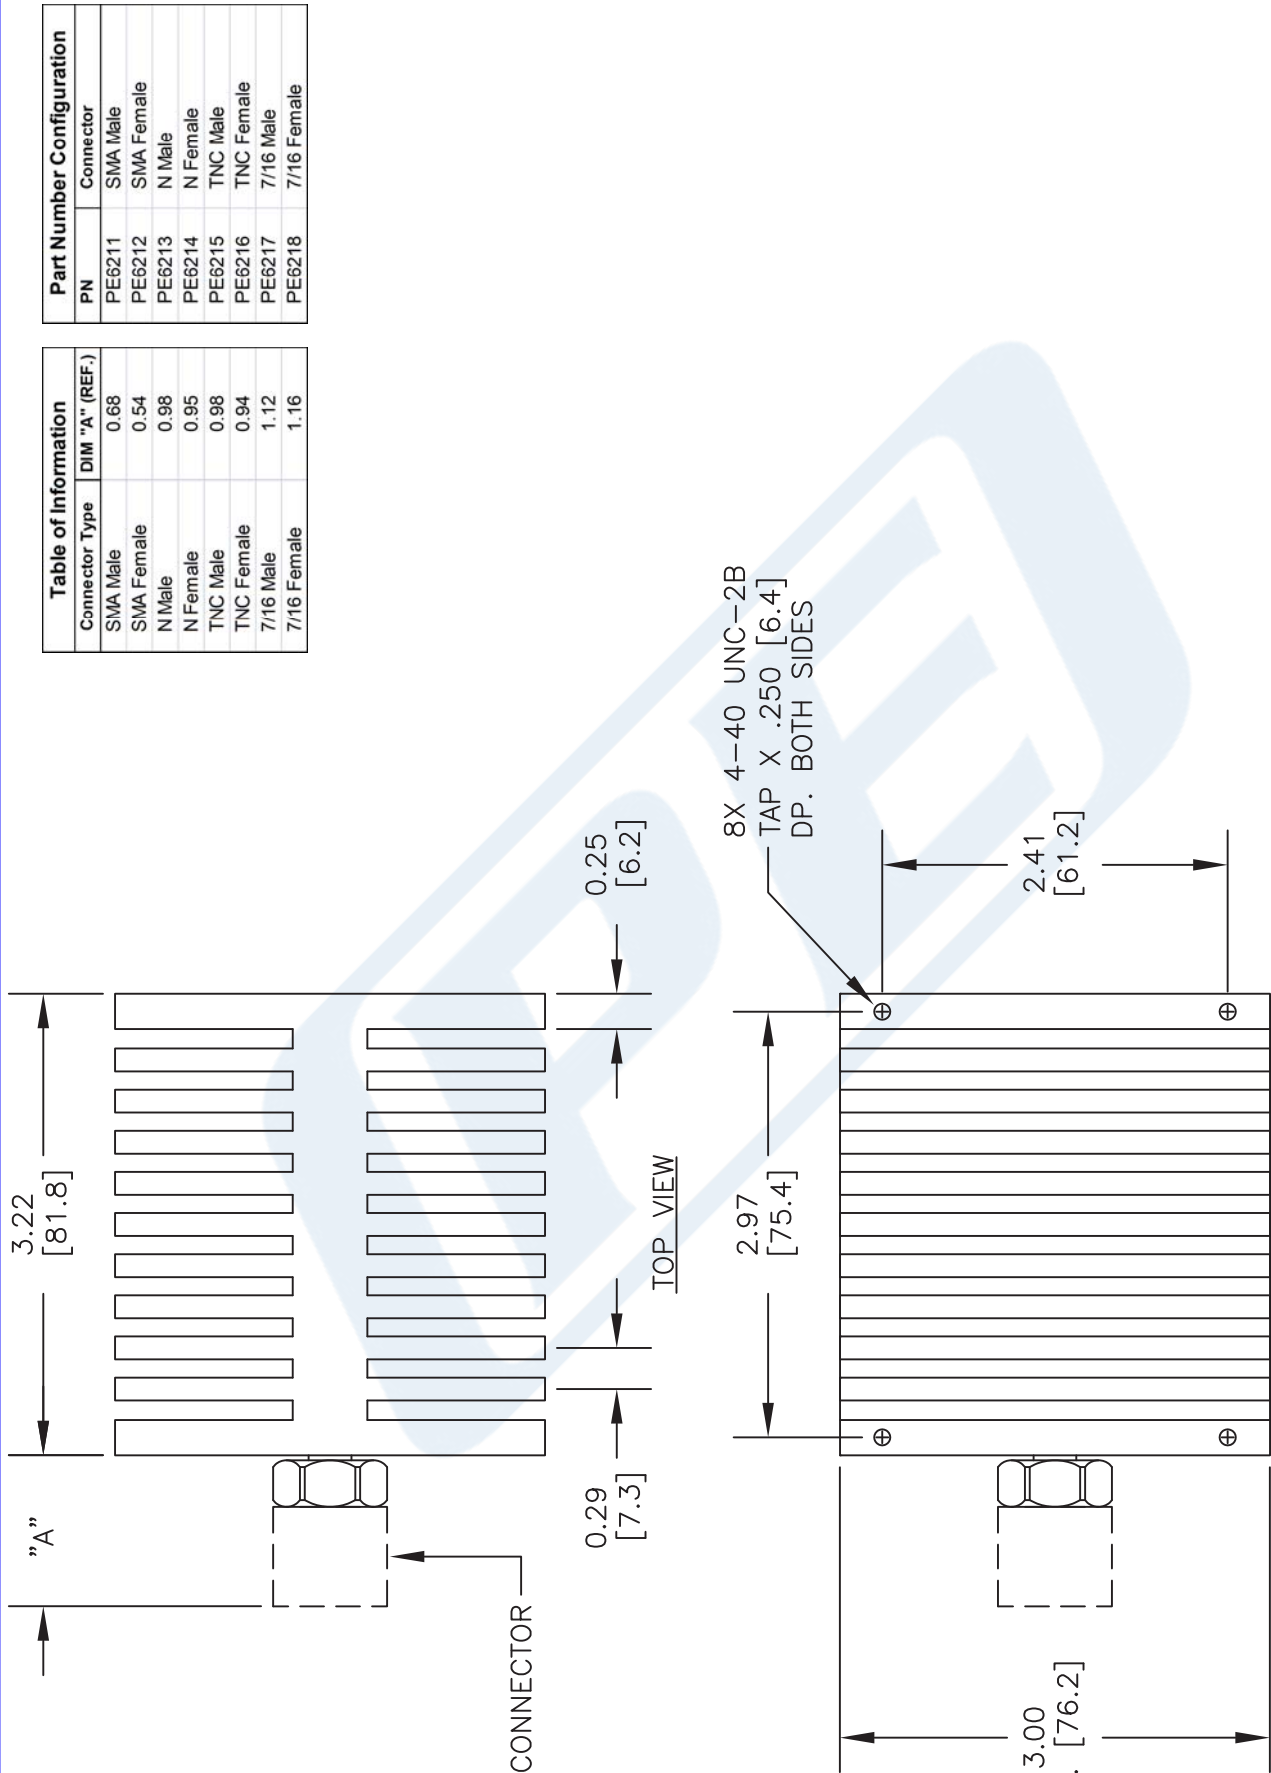


Table of Information		Part Number Configuration	
Connector Type	DIM "A" (REF.)	PN	Connector
SMA Male	0.68	PE6211	SMA Male
SMA Female	0.54	PE6212	SMA Female
N Male	0.98	PE6213	N Male
N Female	0.95	PE6214	N Female
TNC Male	0.98	PE6215	TNC Male
TNC Female	0.94	PE6216	TNC Female
7/16 Male	1.12	PE6217	7/16 Male
7/16 Female	1.16	PE6218	7/16 Female

NOTES:		SCALE N/A		SIZE A		2233	
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.		CAD FILE		080213		FSCM NO. 53919	
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.		DWG TITLE		PE62xx		DWG TITLE	
3. DIMENSIONS ARE IN INCHES [mm].		FSCM NO. 53919		PE62xx		FSCM NO. 53919	

**PASTERNAK®**
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].