



## 1 Watt RF Load Up to 18 GHz with SMP Female

### RF Terminations Technical Data Sheet

PE6TR1040

#### Features

- 50 Ohm RF Load
- DC to 18 GHz Frequency Range
- VSWR 1.20:1 Max
- Max Power 1 Watt (CW)
- SMP Female Coaxial Interface

#### Applications

- Wireless
- Radar Systems
- Test and Measurement
- Commercial and Military Communication
- SatCom

#### Description

RF termination (also called RF load or dummy load) PE6TR1040 from Pasternack operates from DC to 18 GHz and handles up to 1 Watt (CW). This SMP termination (or load) is a 50 Ohm impedance and has a Female gender. PE6TR1040 50 Ohm SMP load termination offers 1.20:1 max VSWR. RF terminations / loads are critical passive components in many RF, microwave and millimeter wave systems where signal reflection from unused ports can reduce the signal integrity can potentially damage the device. By terminating an unused port with a matched load (dummy load), the incident energy will be absorbed with minimal reflection. These radio frequency termination components are commonly used to terminate devices such as couplers, circulators, and switches. Loads / terminations are also widely used in measurement systems to ensure accurate results. Pasternack offers a large selection of in-stock RF, microwave and millimeter wave terminations up to 65 GHz with great performance over the entire operating range and with power handling capabilities up to 800 Watts (CW).

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
Impedance		50		Ohms
VSWR			1.2:1	
Input Power (CW)			1	Watts
Input Power (Peak)			100	Watts
1 $\mu$ sec PW, 1% DC				

#### Mechanical Specifications

##### Configuration

Connector	SMP Female
Connector Specification	MIL STD-348A

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 Watt RF Load Up to 18 GHz with SMP Female PE6TR1040](#)



## 1 Watt RF Load Up to 18 GHz with SMP Female

### RF Terminations Technical Data Sheet

PE6TR1040

#### Material Specifications

Description	Material	Plating
Connector 1 Contact	Beryllium Copper	Gold
Insulation	PTFE	
Body	Beryllium Copper	Gold

#### Environmental Specifications

##### Temperature

Operating Range

-55 to +125 deg C

Storage Range


-55 to +125 deg C

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

#### Typical Performance Data

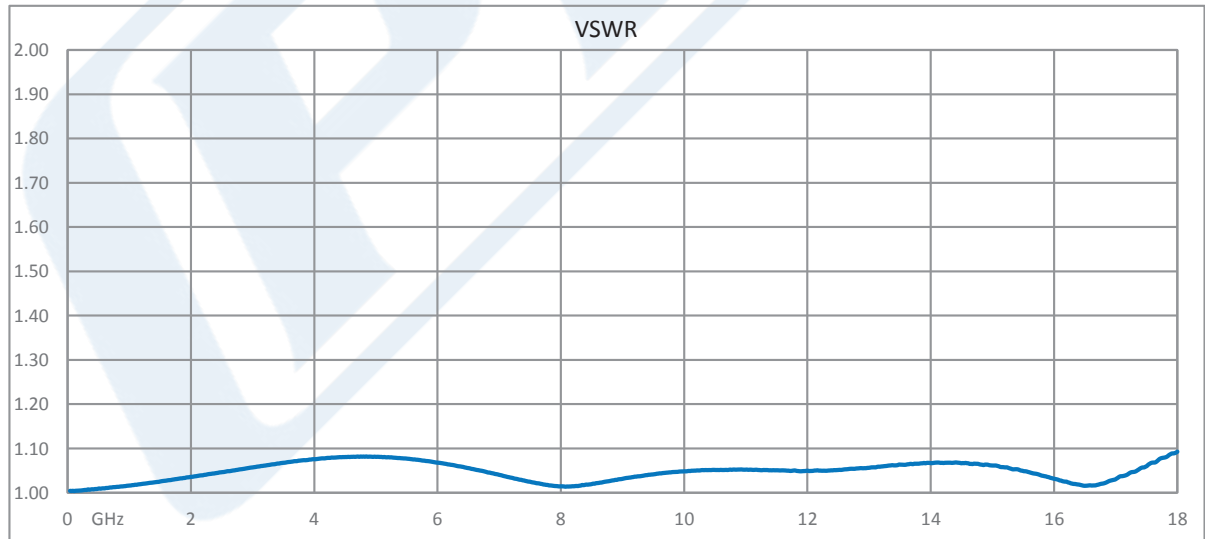

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 Watt RF Load Up to 18 GHz with SMP Female PE6TR1040](#)




## 1 Watt RF Load Up to 18 GHz with SMP Female

### RF Terminations Technical Data Sheet

PE6TR1040

#### Power derating Vs. temperature

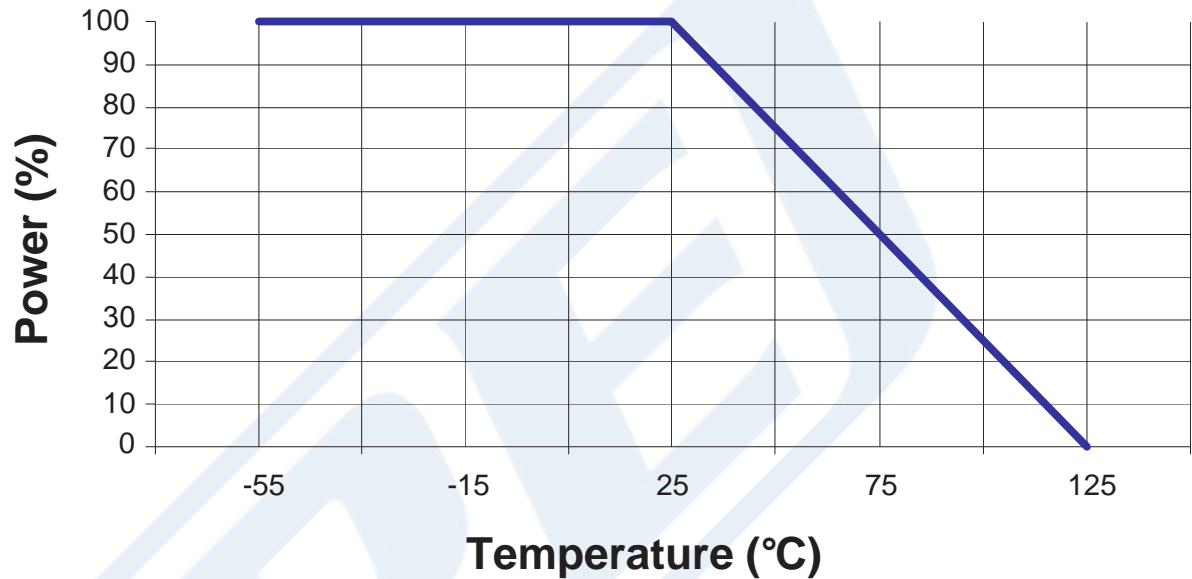


1 Watt RF Load Up to 18 GHz with SMP Female from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 Watt RF Load Up to 18 GHz with SMP Female PE6TR1040](https://www.pasternack.com/1-watts-smp-female-rf-load-18-ghz-pe6tr1040-p.aspx)

URL: <https://www.pasternack.com/1-watts-smp-female-rf-load-18-ghz-pe6tr1040-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE6TR1040 CAD Drawing  
1 Watt RF Load Up to 18 GHz with SMP Female

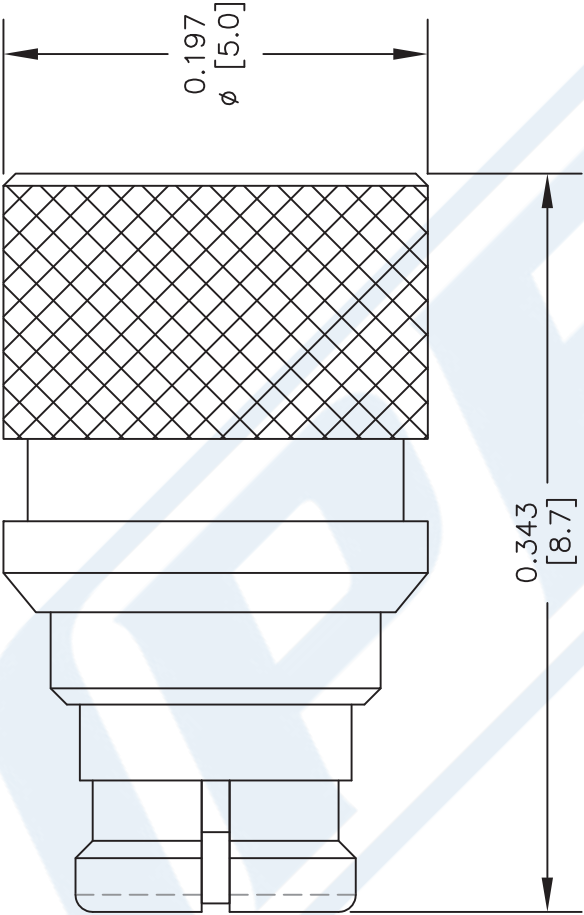

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.1
.XXX	±0.05

\*STANDARD TOLERANCES APPLY  
ONLY TO DIMENSIONS IN INCHES

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].  
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

DWG TITLE  
**PE6TR1040**

CAGE CODE 53919

CAD FILE 061417

SCALE N/A

SIZE A

2233

**PE PASTERNAK®**  
THE ENGINEER'S RF SOURCE  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)