


MATERIALS

BODY	PASSIVATED STAINLESS STEEL
CONTACT	GOLD PLATED
SUPPORT BEAD	AIR-POLYPHENYLENE OXIDE COMPOSITE
COUPLING NUT	BRASS NICKEL PLATED

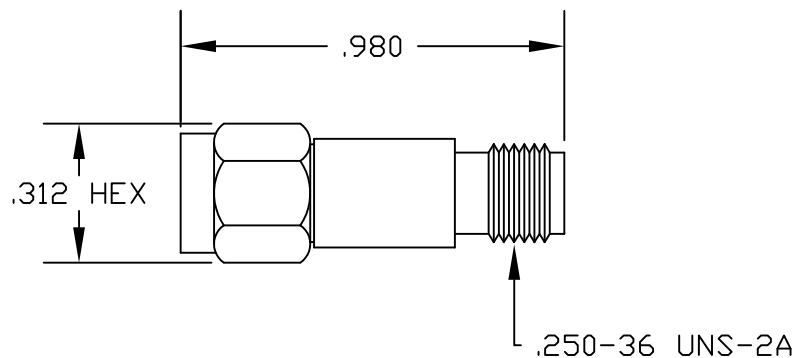

SPECIFICATIONS

FREQUENCY RANGE: DC TO 26.5 GHz

ATTENUATION: 30 dB

IMPEDANCE: 50 OHMS

ACCURACY: ± 1.0 dB

VSWR:

DC – 26 GHz 1.60:1 MAX

18 GHz – 26.5 GHz 1.40:1 MAX

AVG. POWER HANDLING CAPABILITY: 2 WATT

*2.9mm CONNECTORS WILL MATE BOTH

ELECTRICALLY & MECHANICALLY WITH ALL SMA,
3.5mm & K CONNECTORS. THE K CONNECTOR
IS A TRADE MARK OF ANRITSU CORPORATION.*



PASTERNAK ENTERPRISES, INC.

P.O BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com

COAXIAL & FIBER OPTICS

DWG TITLE

PE7024/SP-30

DES.

2.9mm ATTENUATOR, 30 dB FREQUENCY
RANGE: DC TO 26.5 GHz

REV. -

FSCM NO. 53919

CAD FILE 121409

SCALE N/A

SIZE A

127

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES.