



## 10 dB Fixed Attenuator, BNC Male to BNC Female Brass Nickel Body Rated to 2 Watts Up to 4 GHz

### RF Fixed Attenuators Technical Data Sheet

PE7049-10

#### Features

- Bidirectional
- DC to 4 GHz Frequency Range
- Attenuation 10±0.6 dB
- Max Power 2 Watts (CW)
- VSWR < 1.25:1

#### Applications

- Instrumentation
- Precision measurements
- Prototyping and characterization
- Production systems

#### Description

Pasternack carries a wide range of fixed attenuators with a broad selection of attenuation levels, frequency ranges, and power dissipation ranges. RF microwave attenuators (also known as RF pads) lower the amplitude of a signal (attenuate) a known amount and can be used in a wide variety of applications. These attenuator pads are used when a signal needs to be reduced to protect measurement equipment or other circuitry, to extend the range of power meters and amplifiers, and to impedance match circuits by reducing the VSWR seen by adjacent components. RF attenuators can prevent signal overload in amplifiers, receivers and detectors, adjusting the signal level to a range that is optimal.

Few RF components are as commonly used as fixed coaxial attenuators, and Pasternack carries one of the largest in-stock varieties and ships them same day. The 10 dB Fixed Attenuator PE7049-10 is rated to 2 Watts and operates from DC to 4 GHz. The versatile coaxial package uses BNC male to BNC female connectors and is also REACH and RoHS compliant.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
Impedance		50		Ohms
Nominal Attenuation		10		dB
Attenuation Accuracy		±0.6		dB
VSWR			1.25:1	
Input Power, CW			2	Watts
derated linearly to 0.5W at +125°C				
Input Power, Peak			250	Watts
5µs pulse, 0.05% duty cycle				

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 dB Fixed Attenuator, BNC Male to BNC Female Brass Nickel Body Rated to 2 Watts Up to 4 GHz PE7049-10](#)



## 10 dB Fixed Attenuator, BNC Male to BNC Female Brass Nickel Body Rated to 2 Watts Up to 4 GHz

### RF Fixed Attenuators Technical Data Sheet

PE7049-10

#### Mechanical Specifications

##### Size

Length 1.36 in [34.54 mm]  
Width/Diameter 0.58 in [14.73 mm]

Weight 0.041 lbs [18.6 g]

Body Material and Plating Brass, Nickel

##### Configuration

Design Fixed, Bidirectional  
Package Style Connectorized Module

#### Connectors

Description	Connector 1	Connector 2
Type	BNC Male	BNC Female
Connector Specification	MIL-STD-348	MIL-STD-348
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Coupling Nut Material and Plating	Brass, Nickel	
Body Material and Plating	Brass, Nickel	Brass, Nickel

#### Environmental Specifications

##### Temperature

Operating Range -65 to +125 deg C

#### Compliance Certifications (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant

REACH Compliant 12/17/2015

#### Plotted and Other Data

Notes:

10 dB Fixed Attenuator, BNC Male to BNC Female Brass Nickel Body Rated to 2 Watts Up to 4 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 dB Fixed Attenuator, BNC Male to BNC Female Brass Nickel Body Rated to 2 Watts Up to 4 GHz PE7049-10](http://www.Pasternack.com/10db-fixed-bnc-male-bnc-female-2-watts-attenuator-pe7049-10-p.aspx)

URL: <http://www.pasternack.com/10db-fixed-bnc-male-bnc-female-2-watts-attenuator-pe7049-10-p.aspx>

PE7049-10 CAD Drawing

10 dB Fixed Attenuator, BNC Male to BNC Female Brass  
Nickel Body Rated to 2 Watts Up to 4 GHz

P/N	ATTEN.	FIGURE
PE7049-1	1 dB	1
PE7049-2	2 dB	1
PE7049-3	3 dB	1
PE7049-6	6 dB	1
PE7049-10	10 dB	1
PE7049-20	20 dB	1
PE7049-30	30 dB	1

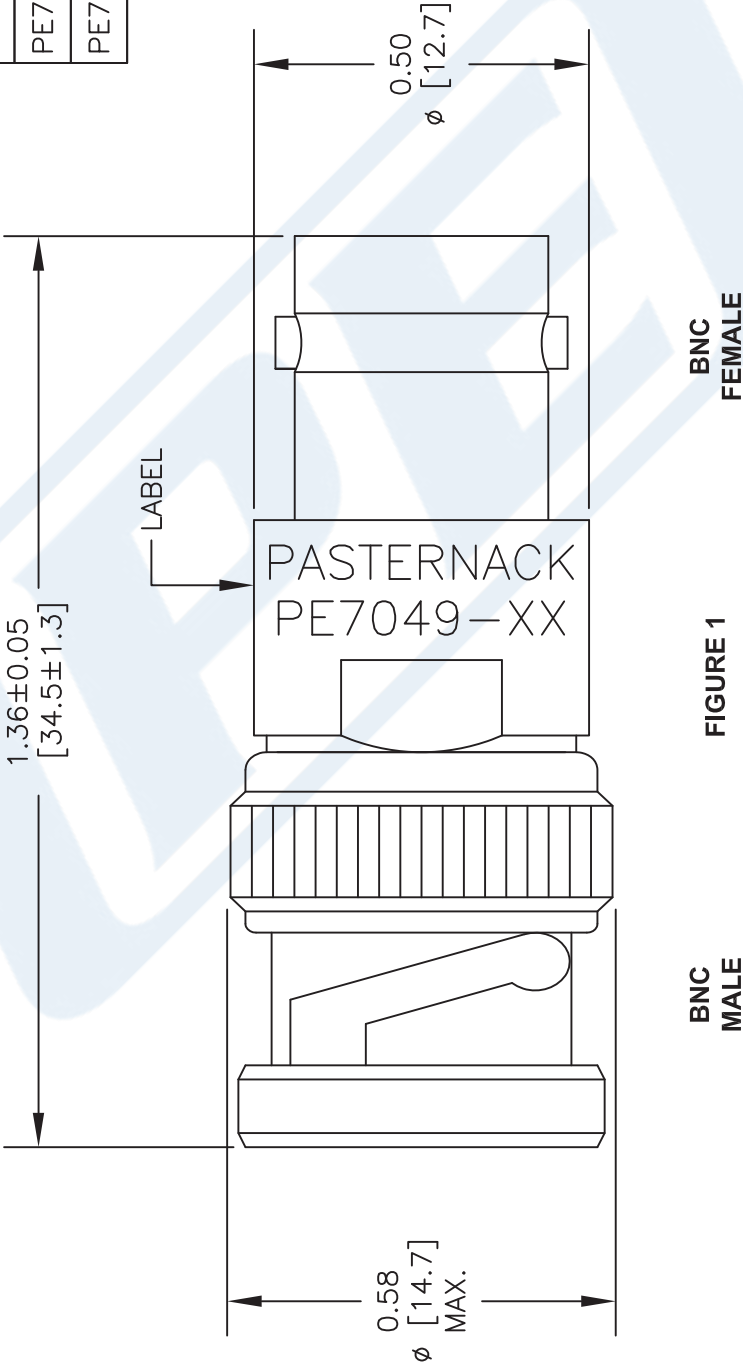

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE	FSCM NO. 53919	CAD FILE	SCALE N/A	SIZE A	3045
PE7049					

**PASTERNAK®**  
THE ENGINEER'S RF SOURCE  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)