



Absorptive SPST PIN Diode Switch Operating
From 500 MHz to 40 GHz Up to 0.1 Watts
(+20 dBm) and Field Replaceable 2.92mm

PIN Diode Switches Technical Data Sheet

PE71S6214

Features

- SPST Absorptive Switch
- 0.5 GHz to 40.0 GHz
- High Speed Switching
- Insertion Loss 5.5 dB max
- Isolation 80 dB typ
- Power Input 20 dBm CW max
- Field Replaceable Connectors

Applications

- Test & Measurement
- Military Communication
- Commercial Communication

Description

The PE71S6214 is a Single Pole Single Throw (SPST) Absorptive PIN Diode Switch that operates from 0.5 GHz to 40 GHz. The output port is terminated in 50 ohms when switched in the isolation (off) state. Outstanding performance includes 5.5 dB max insertion loss, 80 dB typ isolation and 100 ns max switching speed. The design incorporates TTL compatible driver circuitry for accurate logic control. Operational temperature range is -40°C to +85°C and dual voltage controls of +5 VDC and -5 VDC are required. The rugged package is designed to meet a series of MIL-STD-202F environmental conditions including humidity, shock, vibration, and temperature cycle. Package interfaces include solder terminals and female 2.92mm connectors.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.5		40	GHz
Impedance		50		Ohms
VSWR			2.5:1	
Insertion Loss			5.5	dB
Isolation	55			dB
Switching Time			100	ns
Input Power (CW)			0.1	Watts
Survival Power			1	Watts
Positive Operating Voltage		5		Vdc
Negative Operating Voltage		-5		Vdc
Current @ 5 Vdc		20		mA
Current @ -5 Vdc		66		mA
Operating Temperature	-40		+85	deg C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Absorptive SPST PIN Diode Switch Operating From 500 MHz to 40 GHz Up to 0.1 Watts \(+20 dBm\) and Field Replaceable 2.92mm PE71S6214](#)



Absorptive SPST PIN Diode Switch Operating
From 500 MHz to 40 GHz Up to 0.1 Watts
(+20 dBm) and Field Replaceable 2.92mm

PIN Diode Switches Technical Data Sheet

PE71S6214

Mechanical Specifications

Size

Length	1 in [25.4 mm]
Width	1 in [25.4 mm]
Height	0.5 in [12.7 mm]
Weight	0.058 lbs [26.31 g]
Design	Absorptive, SPST
RF Connector	2.92mm Female
RF Connector Option	Field Replaceable
TTL Control Connector	Solder Pin

Environmental Specifications

Temperature

Operating Range	-40 to +85 deg C
Storage Range	-55 to +125 deg C

Humidity

Shock

Vibration

Altitude

Temperature Cycling

ESD Sensitivity

MIL-STD-202F, METHOD 103B COND. B
MIL-STD-202F, METHOD 213B COND. B
MIL-STD-202F, METHOD 204D COND. B
MIL-STD-202F, METHOD 105C COND. B
MIL-STD-202F, METHOD 107D COND. A
ESD Sensitive Material, Transport material in Approved
ESD bags. Handle only in ESD Workstation.



Compliance Certifications (visit www.Pasternack.com for current document)

Not RoHS Compliant
REACH Compliant

12/17/2015

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Absorptive SPST PIN Diode Switch Operating From 500 MHz to 40 GHz Up to 0.1 Watts \(+20 dBm\) and Field Replaceable 2.92mm PE71S6214](#)




Absorptive SPST PIN Diode Switch Operating
From 500 MHz to 40 GHz Up to 0.1 Watts
(+20 dBm) and Field Replaceable 2.92mm

PIN Diode Switches Technical Data Sheet


PE71S6214

Typical Performance Data

(J1 – J2) Insertion Loss and Return Loss

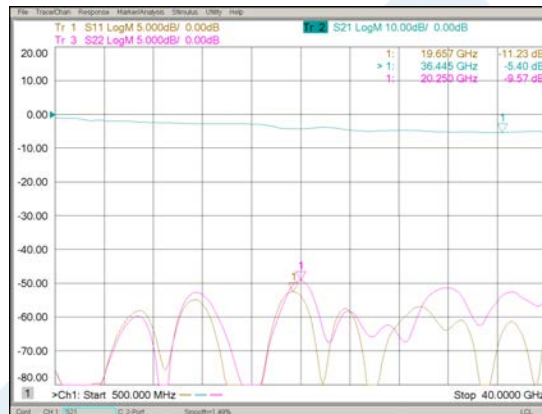

(J1 – J2) Isolation and Termination Return Loss

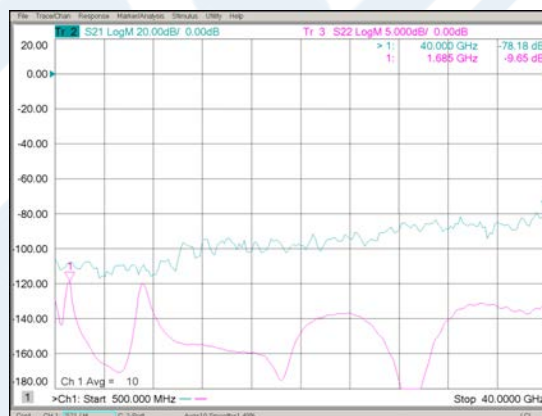


Absorptive SPST PIN Diode Switch Operating From 500 MHz to 40 GHz Up to 0.1 Watts (+20 dBm) and Field Replaceable 2.92mm from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Absorptive SPST PIN Diode Switch Operating From 500 MHz to 40 GHz Up to 0.1 Watts \(+20 dBm\) and Field Replaceable 2.92mm PE71S6214](#)

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Absorptive SPST PIN Diode Switch Operating From 500 MHz to 40 GHz Up to 0.1 Watts \(+20 dBm\) and Field Replaceable 2.92mm PE71S6214](#)

PE71S6214 CAD Drawing

Absorptive SPST PIN Diode Switch Operating From 500 MHz to 40 GHz
Up to 0.1 Watts (+20 dBm) and Field Replaceable 2.92mm

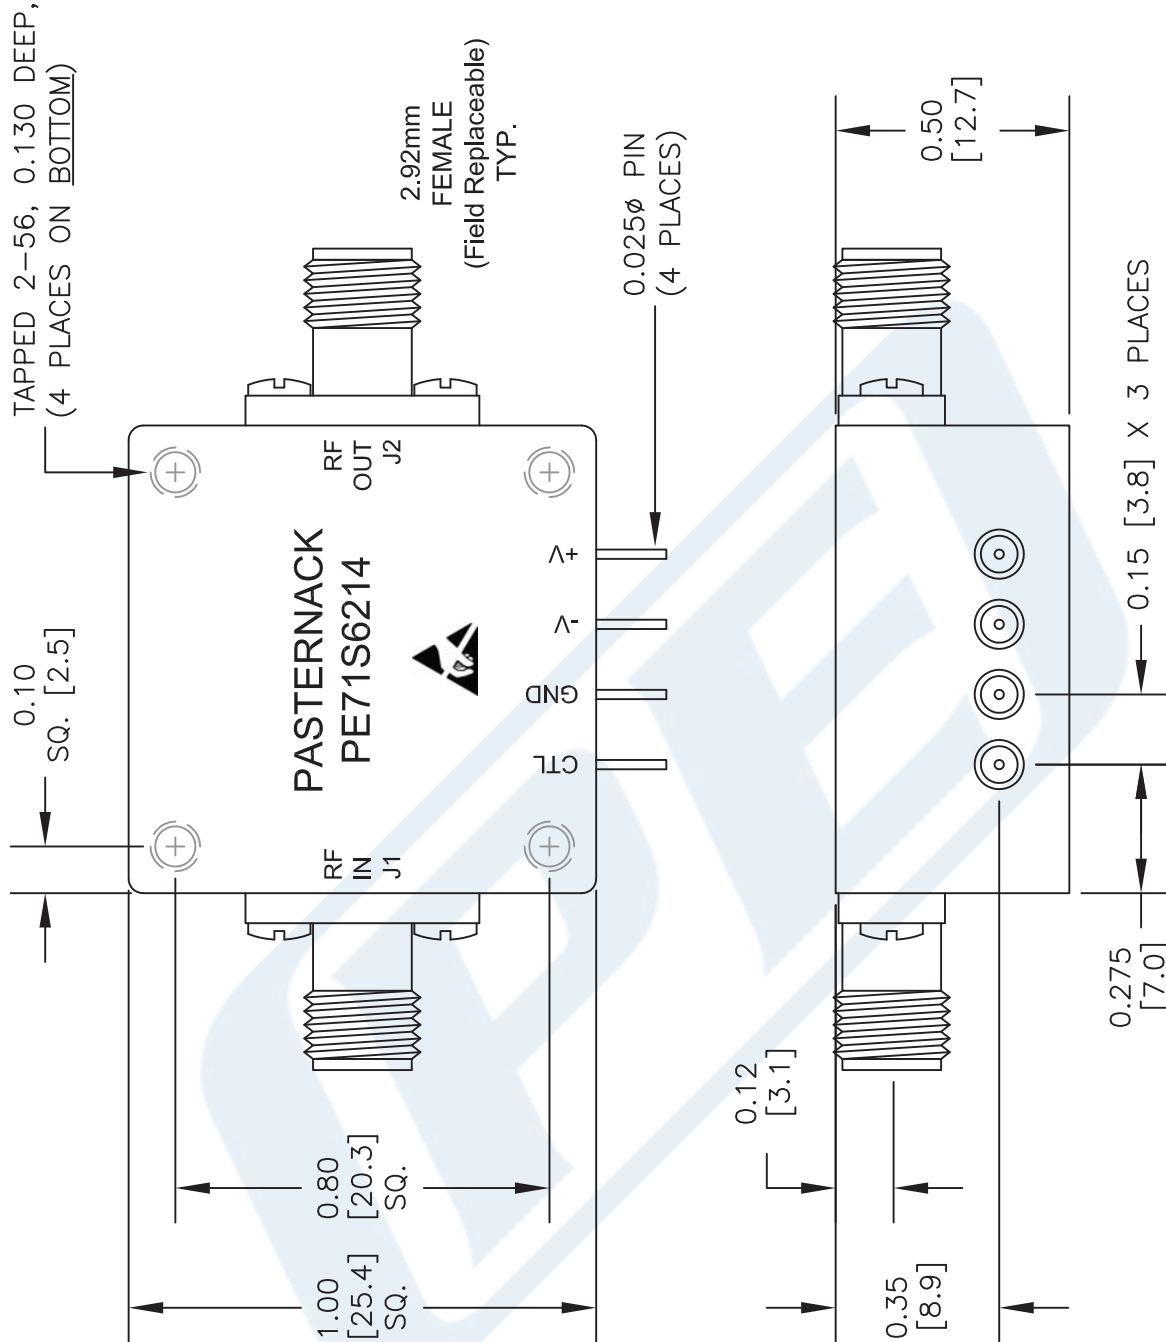

ALL DIMENSIONS ARE IN INCHES.
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010

* THESE DIMENSIONS AND TOLERANCES
SUPERSEDE NOTE #1 ON TITLE BLOCK.

PE PASTERNAK®
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE71S6214

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 041916

SCALE N/A

SIZE A

2233