



Absorptive SPDT PIN Diode Switch Operating From 10 MHz to 1,000 MHz Up to +20 dBm and Field Replaceable SMA

PIN Diode Switches Technical Data Sheet

PE71S6237

Features

- SPDT Absorptive Switch
- 0.01 GHz to 1.0 GHz
- High Speed Switching
- Insertion Loss 1.3 dB max
- Isolation 80 dB typ
- Power Input 20 dBm CW max
- Field Replaceable Connectors

Applications

- Test & Measurement
- Military Communication
- Commercial Communication
- Wireless Communications
- SATCOM
- Military Electronic Systems
- RF Test Stations

Description

The PE71S6237 is a Single Pole Double Throw (SPDT) Absorptive PIN Diode Switch that operates from 0.01 GHz to 1 GHz. The output port is terminated in 50 ohms when switched in the isolation (off) state. Outstanding performance includes 1.3 dB max insertion loss, 80 dB typ isolation, and 200 nsec max switching speed. The design incorporates TTL compatible driver circuitry for accurate logic control. Operational temperature range is -40°C to +85°C and dual voltage controls of +5 DC and -15 DC are required. The rugged package is designed to meet a series of MIL-STD-202F environmental conditions including humidity, shock, vibration, and temperature cycle. Package interfaces include solder terminals and female SMA connectors.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	10		1,000	MHz
Impedance		50		Ohms
Insertion Loss			1.3	dB
Isolation		80		dB
Switching Time			200	ns
Input Power (CW)			0.1	Watts
Survival Power			1	Watts
Positive Operating Voltage		5		V
Negative Operating Voltage		-15		V
Current @ 5 V		100		mA
Current @ -15 V		100		mA
Operating Temperature	-40		+85	deg C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Absorptive SPDT PIN Diode Switch Operating From 10 MHz to 1,000 MHz Up to +20 dBm and Field Replaceable SMA PE71S6237](#)



Absorptive SPDT PIN Diode Switch Operating From 10 MHz
to 1,000 MHz Up to +20 dBm and Field Replaceable SMA

PIN Diode Switches Technical Data Sheet

PE71S6237

Mechanical Specifications

Size

Length	1 in [25.4 mm]
Width	1 in [25.4 mm]
Height	0.4 in [10.16 mm]
Weight	0.05 lbs [22.68 g]
Finish	Blue Paint

Configuration

Design	Absorptive, SPDT
RF Connector	SMA Female
RF Connector Option	Field Replaceable
TTL Control Connector	Solder Pin

Environmental Specifications

Temperature

Operating Range	-40 to +85 deg C
Storage Range	-55 to +125 deg C

Humidity

MIL-STD-202F, Method 103B, Condition B

MIL-STD-202F, Method 213B, Condition B

MIL-STD-202F, Method 204D, Condition B

MIL-STD-202F, Method 105C, Condition B

MIL-STD-202F, Method 107D, Condition A

ESD Sensitive Material, Transport material in Approved
ESD bags. Handle only in ESD Workstation.



Compliance Certifications (visit www.Pasternack.com for current document)

Not RoHS Compliant

REACH Compliant

12/17/2015

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Absorptive SPDT PIN Diode Switch Operating From 10 MHz to 1,000 MHz Up to +20 dBm and Field Replaceable SMA PE71S6237](#)





Absorptive SPDT PIN Diode Switch Operating From 10 MHz to 1,000 MHz Up to +20 dBm and Field Replaceable SMA

PIN Diode Switches Technical Data Sheet

PE71S6237

Typical Performance Data

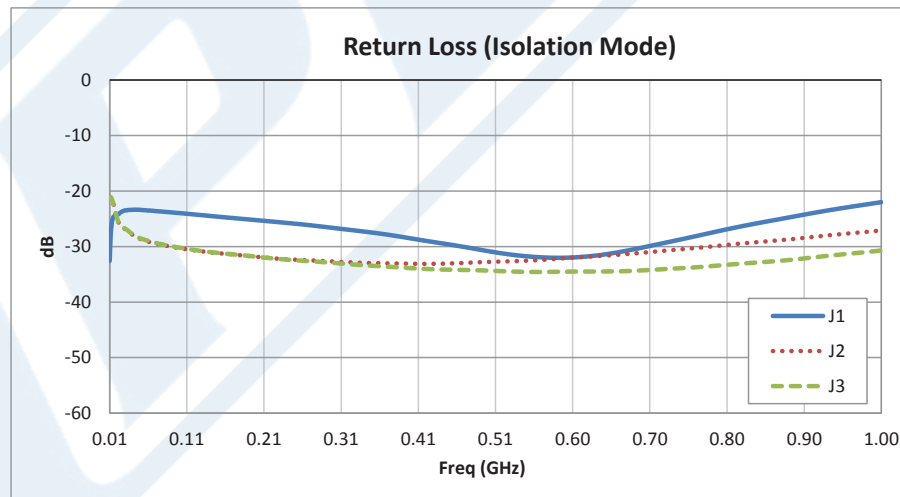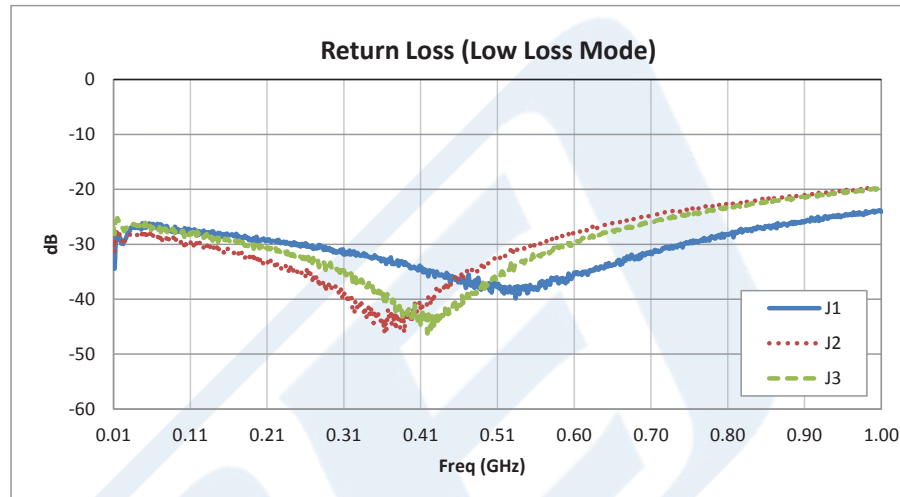



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Absorptive SPDT PIN Diode Switch Operating From 10 MHz to 1,000 MHz Up to +20 dBm and Field Replaceable SMA PE71S6237](#)



Absorptive SPDT PIN Diode Switch Operating From 10 MHz to 1,000 MHz Up to +20 dBm and Field Replaceable SMA

PIN Diode Switches Technical Data Sheet

PE71S6237

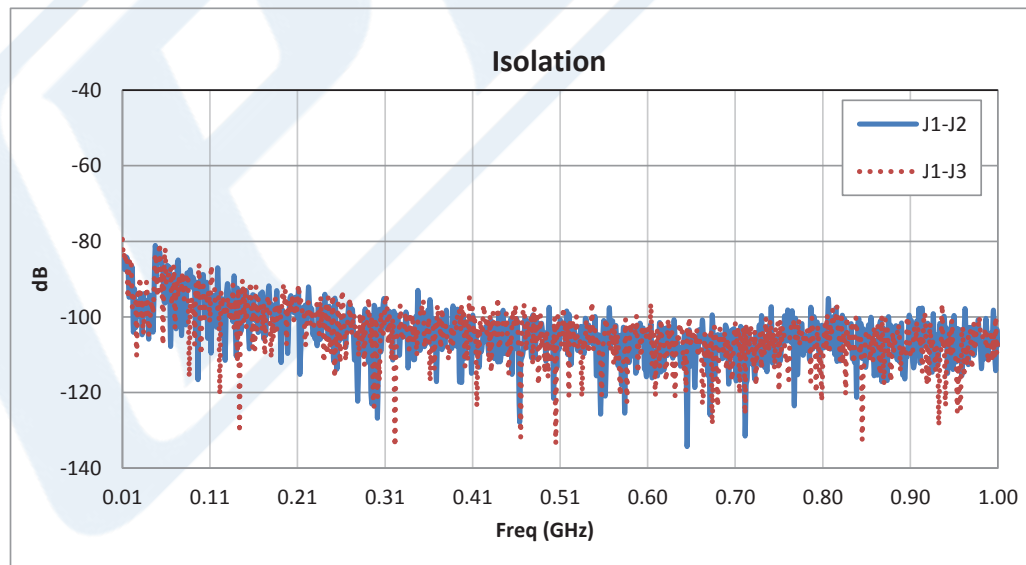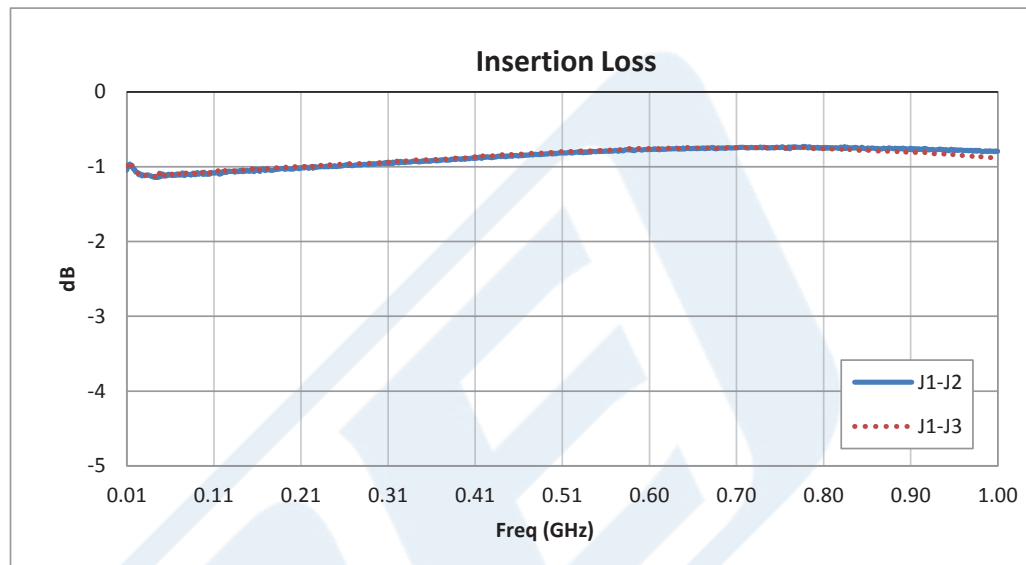

Absorptive SPDT PIN Diode Switch Operating From 10 MHz to 1,000 MHz Up to +20 dBm and Field Replaceable SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Absorptive SPDT PIN Diode Switch Operating From 10 MHz to 1,000 MHz Up to +20 dBm and Field Replaceable SMA PE71S6237](#)



Absorptive SPDT PIN Diode Switch Operating From 10 MHz
to 1,000 MHz Up to +20 dBm and Field Replaceable SMA

PIN Diode Switches Technical Data Sheet


PE71S6237

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Absorptive SPDT PIN Diode Switch Operating From 10 MHz to 1,000 MHz Up to +20 dBm and Field Replaceable SMA PE71S6237](http://www.pasternack.com/absorptive-spdt-pin-diode-switch-1000-mhz-20-dbm-sma-pe71s6237-p.aspx)

URL: <http://www.pasternack.com/absorptive-spdt-pin-diode-switch-1000-mhz-20-dbm-sma-pe71s6237-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

Absorptive SPDT PIN Diode Switch Operating From 10 MHz to 1,000 MHz Up to +20 dBm and Field Replaceable SMA

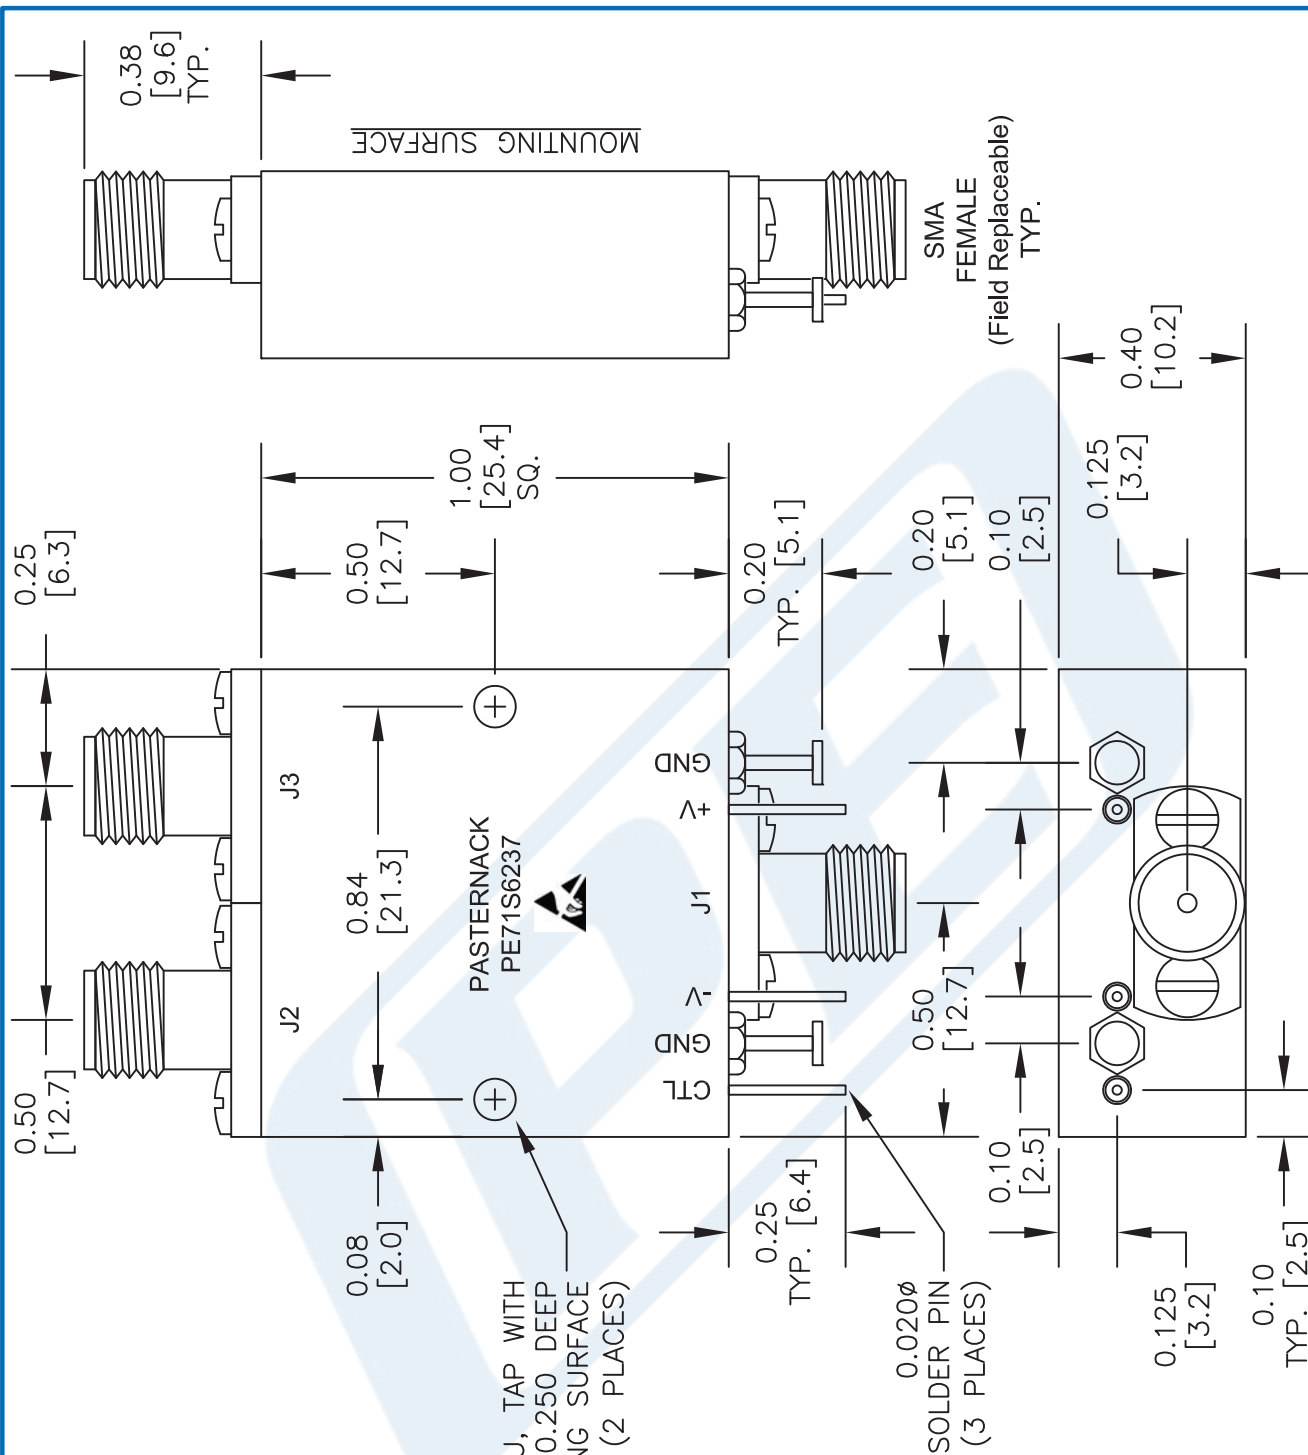

LOGIC TABLE		
CTL	J1-J2	J1-J3
0	ON	OFF
1	OFF	ON

ALL DIMENSIONS ARE IN INCHES.
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010

* THESE DIMENSIONS AND TOLERANCES
SUPERSEDE NOTE #1 ON TITLE BLOCK.



PASTERNAK®
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.

P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Phone: (345) 201-1921 | Fax: (345) 201-1741
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE71S6237

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES (mm).

FSCM NO. 53919

CAD FILE 033016

SCALE N/A

SIZE A

2233