



SP6T 0.03 dB Low Insertion Loss Repeatability
Relay Latching Switch, Terminated, DC to 20 GHz,
70W, 24V, Indicators, Self Cut Off, SMA

Electromechanical Relay Switches Technical Data Sheet

PE71S6331

Features

- DC to 20 GHz SP6T Switch
- Guaranteed Low Insertion loss Repeatability: 0.03 dB max over 10 Million Lifecycles
- Insertion Loss: 0.6 dB max
- Isolation: up to 80 dB min
- +24 Vdc Nominal Voltage
- Hot Switching: 1W CW max
- Latching Self Cutoff Actuator
- Position Indicators
- Guaranteed to meet MIL-STD-202 Environmental Conditions
- SMA connectors
- HE10 receptacle with ribbon cable and HE10 connector
- -25°C to +75°C Operating Temperature
- 10 Million Lifecycles Minimum

Applications

- Electronic Warfare
- Electronic Countermeasures
- Microwave Radio
- VSAT
- Radar
- Space Systems
- Test Instrumentation
- Research and Development
- Signal Monitoring Devices

Description

The PE71S6331 is a single pole six throw (SP6T) terminated electromechanical switch that operates across a wide frequency range from DC to 20 GHz and has guaranteed insertion loss repeatability of 0.03 dB max over a life span of 10 million switching cycles in a Break Before Make condition. Maximum Insertion loss is 0.2 dB and Isolation is rated up to 85 dB minimum. The model also supports a hot switching limit of up to 1W CW maximum. The Latching Self Cut-Off actuator design includes indicators, a +24 Vdc operating voltage, and operates over a temperature range of -25°C to +75°C. The rugged and compact package assembly supports SMA connectors and an HE10 receptacle, ribbon cable, and HE10 connector for command control capability. And for highly reliable operation, the model is guaranteed to meet MIL-STD-202 environmental test conditions that include temperature cycle, vibration, and shock.

Electrical Specifications

Switch Type	SP6T, Terminated
Actuator Type	Latching
Switching Sequence	Break Before Make
Actuator Options	Indicators, Self Cut Off, Reset
Polarity	Positive Common

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		20	GHz
Impedance		50		Ohms
Operating Voltage	20	24	32	Volts
Actuating Current @ 24 Volts		200		mA
Insertion Loss			0.6	dB
Insertion Loss Repeatability			0.03	dB
Coil Resistance		120		Ohms
Third Order Intermodulation		-120		dBc
Input Power (CW)			70	Watts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP6T 0.03 dB Low Insertion Loss Repeatability Relay Latching Switch, Terminated, DC to 20 GHz, 70W, 24V, Indicators, Self Cut Off, SMA PE71S6331](#)



SP6T 0.03 dB Low Insertion Loss Repeatability
 Relay Latching Switch, Terminated, DC to 20 GHz,
 70W, 24V, Indicators, Self Cut Off, SMA

Electromechanical Relay Switches Technical Data

PE71S6331

Switching Time	15	ms Max
----------------	----	--------

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 6	6 to 12.4	12.4 to 18	18 to 20		GHz
VSWR, Max	1.2:1	1.35:1	1.45:1	1.7:1		
Insertion Loss, Max	0.39	0.486	0.57	0.6		dB
Isolation, Min	100	90	80	80		dB

Electrical Specification Notes:
 Insertion Loss Repeatability at 25° is 0.03 dB

Mechanical Specifications

Size

Length	1.25 in [31.75 mm]
Width/Diameter	1.25 in [31.75 mm]
Height	0.5 in [12.7 mm]
Weight	0.587 lbs [266.26 g]
Body Material and Plating	Aluminum, Nickel
Package Type	Connectorized
Operating Life	10,000,000 Cycles

Connectors

RF Connector Type	SMA Female
RF Connector Contact Material and Plating	Beryllium Copper, Gold
RF Connector Body Material and Plating	Passivated Stainless Steel
Control Connector	HE 10

Environmental Specifications

Temperature

Operating Range	-25 to +75 deg C
Storage Range	-55 to +85 deg C

Humidity	MIL-STD-202, Method 106E, Condition E, 65°C, 95% RH, 10 days
----------	--

Shock	MIL-STD-202, method 213B, Condition G, 50g, 6 ms, 1/2 Sine, Operating
-------	---

Vibration	MIL-STD-202, Method 204D, Condition D, 10-2000 Hz, 10g, Operating
-----------	---

Altitude	MIL-STD-202-Method 105C, Condition B, 50,000 feet (15,240 meters)
----------	---

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP6T 0.03 dB Low Insertion Loss Repeatability Relay Latching Switch, Terminated, DC to 20 GHz, 70W, 24V, Indicators, Self Cut Off, SMA PE71S6331](#)



SP6T 0.03 dB Low Insertion Loss Repeatability
Relay Latching Switch, Terminated, DC to 20 GHz,
70W, 24V, Indicators, Self Cut Off, SMA

Electromechanical Relay Switches Technical Data

PE71S6331

Temperature Cycling

EMI/RFI

Magnetic Field
ESD Sensitivity



MIL-STD-202, Method 107D, Condition A, -55oC to +85oC, 10 cycles

MIL-STD-1344, Method 3008, or IEC 61726, 55 dB at 20 GHz

< 5x10⁻⁵ gauss at 1 meter


ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in ESD Workstation.

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data

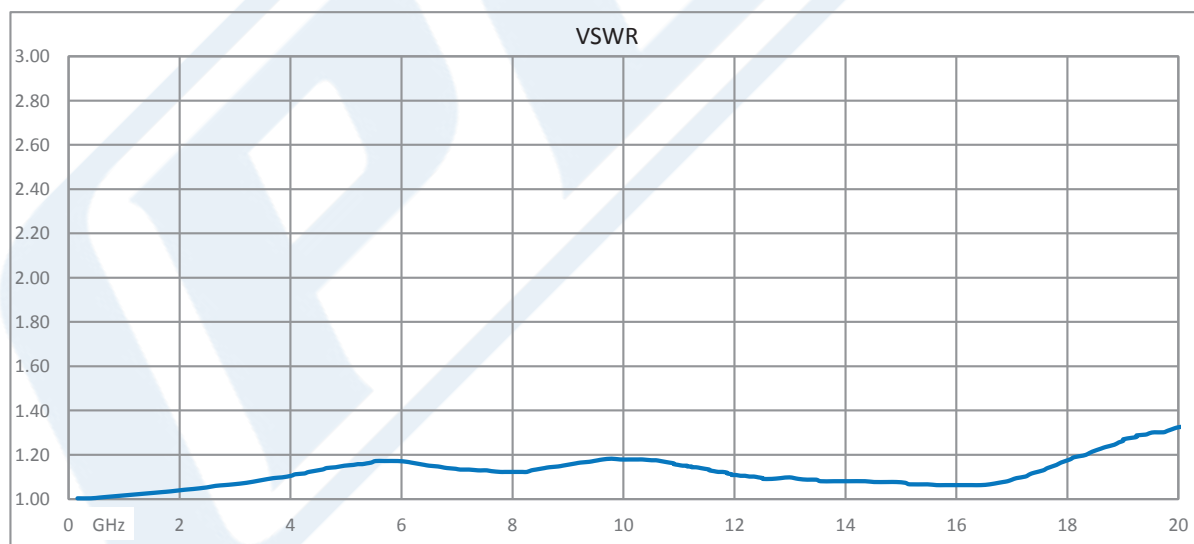


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP6T 0.03 dB Low Insertion Loss Repeatability Relay Latching Switch, Terminated, DC to 20 GHz, 70W, 24V, Indicators, Self Cut Off, SMA PE71S6331](#)



SP6T 0.03 dB Low Insertion Loss Repeatability
Relay Latching Switch, Terminated, DC to 20 GHz,
70W, 24V, Indicators, Self Cut Off, SMA

Electromechanical Relay Switches Technical Data

PE71S6331

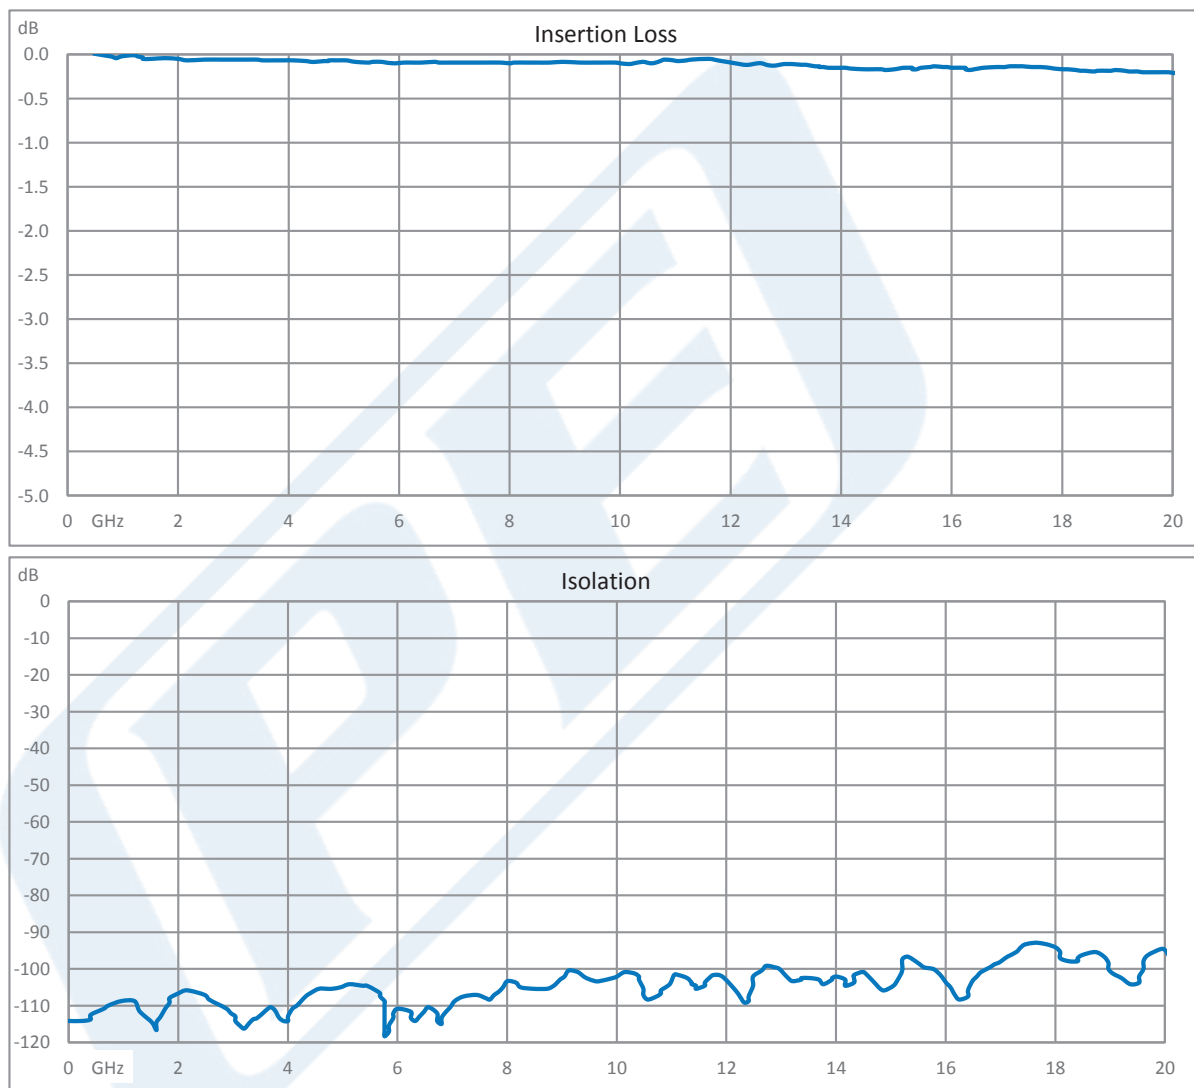

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP6T 0.03 dB Low Insertion Loss Repeatability Relay Latching Switch, Terminated, DC to 20 GHz, 70W, 24V, Indicators, Self Cut Off, SMA PE71S6331](#)



SP6T 0.03 dB Low Insertion Loss Repeatability
Relay Latching Switch, Terminated, DC to 20 GHz,
70W, 24V, Indicators, Self Cut Off, SMA


Electromechanical Relay Switches Technical Data

PE71S6331

POWER RATING CHART


This graph is based on the following conditions :

- Ambient temperature : + 25°C
- Sea level
- V.S.W.R. : 1 and cold switching

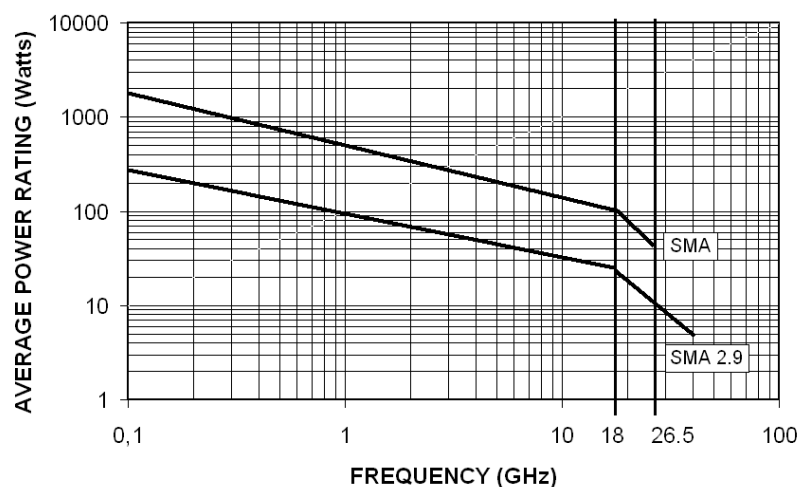

DERATING FACTOR VERSUS V.S.W.R.

The average power input must be reduced for load V.S.W.R. above 1.

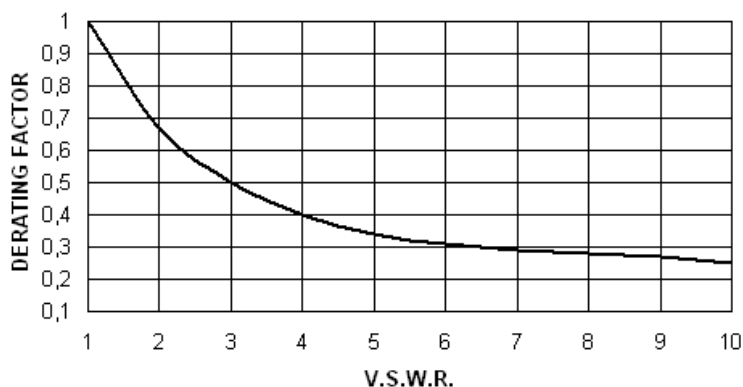

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP6T 0.03 dB Low Insertion Loss Repeatability Relay Latching Switch, Terminated, DC to 20 GHz, 70W, 24V, Indicators, Self Cut Off, SMA PE71S6331](#)



SP6T 0.03 dB Low Insertion Loss Repeatability
Relay Latching Switch, Terminated, DC to 20 GHz,
70W, 24V, Indicators, Self Cut Off, SMA

Electromechanical Relay Switches Technical Data

PE71S6331

SP6T 0.03 dB Low Insertion Loss Repeatability Relay Latching Switch, Terminated, DC to 20 GHz, 70W, 24V, Indicators, Self Cut Off, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP6T 0.03 dB Low Insertion Loss Repeatability Relay Latching Switch, Terminated, DC to 20 GHz, 70W, 24V, Indicators, Self Cut Off, SMA PE71S6331](https://www.pasternack.com/sma-sp6t-electromechanical-relay-latching-switch-indicators-self-cut-off-reset-pe71s6331-p.aspx)

URL: <https://www.pasternack.com/sma-sp6t-electromechanical-relay-latching-switch-indicators-self-cut-off-reset-pe71s6331-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE71S6331 CAD Drawing

SP6T 0.03 dB Low Insertion Loss Repeatability Relay Latching Switch,
Terminated, DC to 20 GHz, 70W, 24V, Indicators, Self Cut Off, SMA

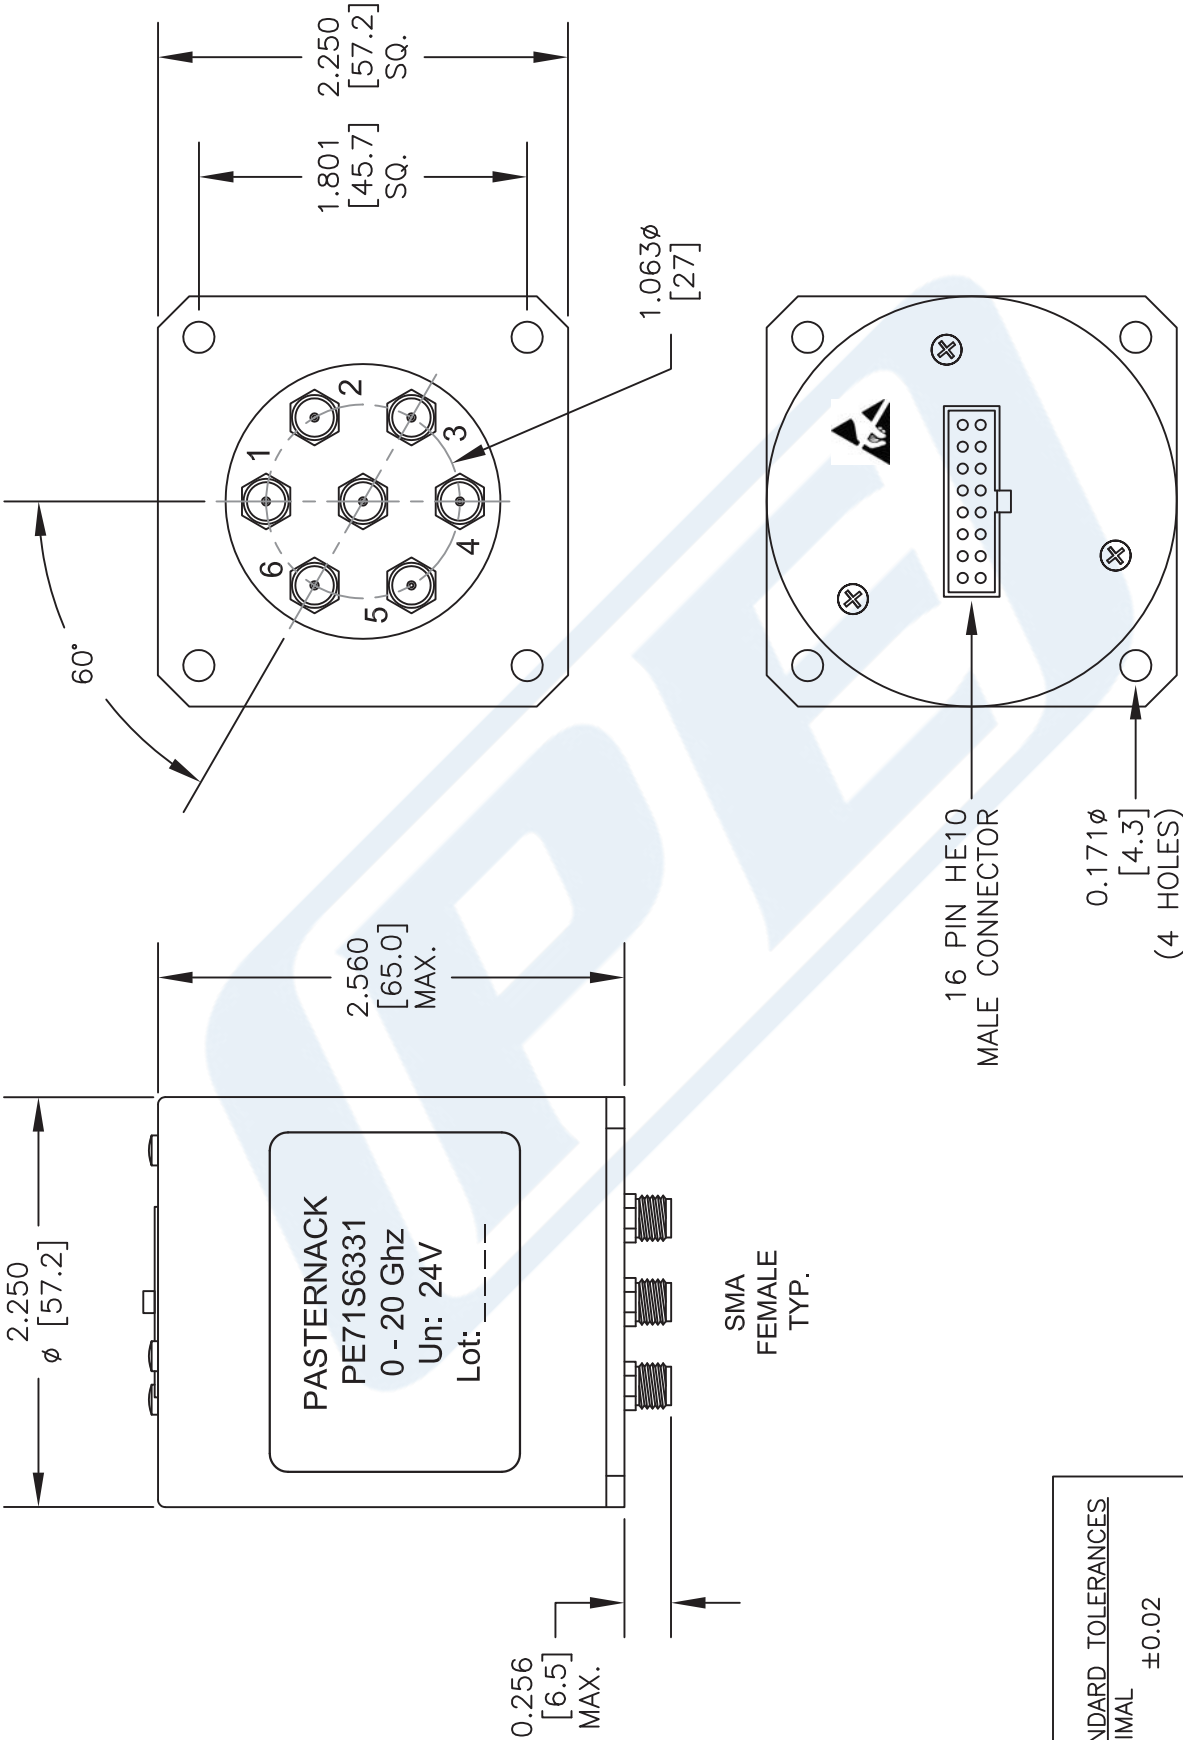

DWG TITLE

PE71S6331

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

Website: www.pasternack.com | E-Mail: sales@pasternack.com

PASTERNAK
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.

P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: www.pasternack.com | E-Mail: sales@pasternack.com

CAGE CODE 53919

CAD FILE 031717


SCALE N/A

SIZE A

2233

PE71S6331 CAD Drawing

SP6T 0.03 dB Low Insertion Loss Repeatability Relay Latching Switch,
Terminated, DC to 20 GHz, 70W, 24V, Indicators, Self Cut Off, SMA

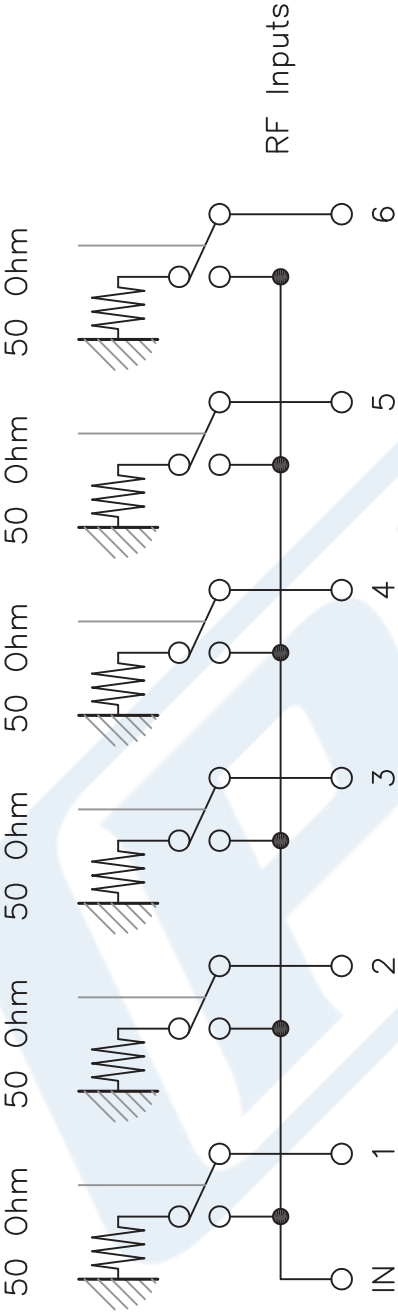

SINGLE POLE 6 THROW TERMINATED

STANDARD TOLERANCES
DECIMAL
±0.02

*STANDARD TOLERANCES APPLY
ONLY TO DIMENSIONS IN INCHES

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].


DWG TITLE
PE71S6331

CAGE CODE 53919

PE PASTERNAK®
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

PE71S6331 CAD Drawing

SP6T 0.03 dB Low Insertion Loss Repeatability Relay Latching Switch,
Terminated, DC to 20 GHz, 70W, 24V, Indicators, Self Cut Off, SMA

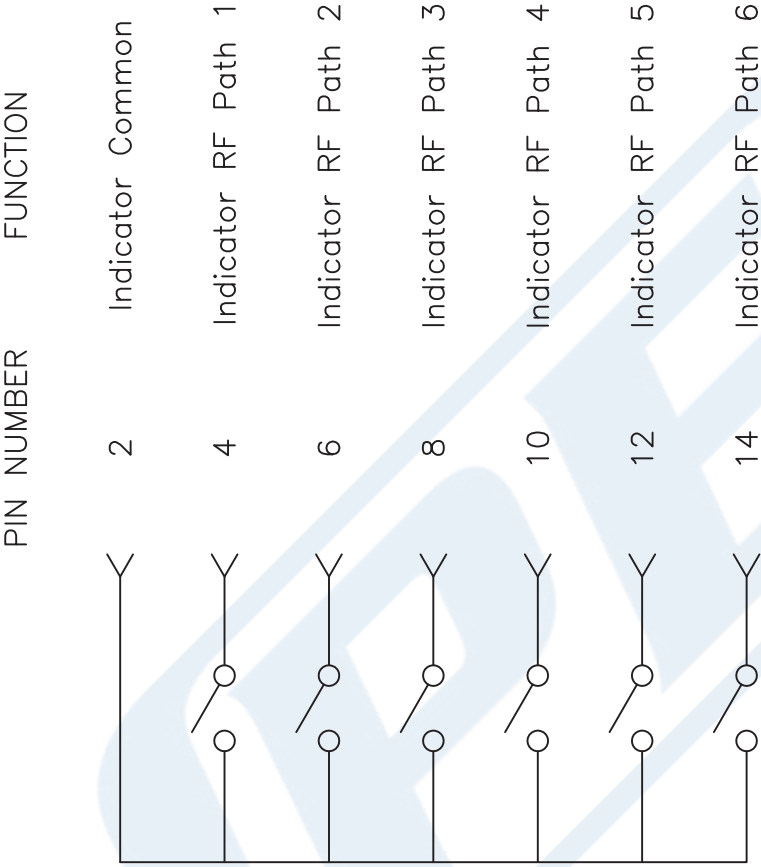

ELECTRONIC POSITION INDICATORS

The electronic position indicators use photo-MOS transistors which are driven by the mechanical position of the RF paths moving elements. The circuitry consists of a common which can be connected to an output corresponding to selected RF path. If one or several RF paths are closed, the corresponding indicators are connected to the common. The photo-MOS transistors are configured for AC and/or DC operation. The electronic position indicators require the supply (20 to 32 VDC) to be connected to pin 1 and ground connected to pin 15.

STANDARD TOLERANCES
DECIMAL
±0.02

*STANDARD TOLERANCES APPLY
ONLY TO DIMENSIONS IN INCHES

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE

PE71S6331

CAGE CODE 53919

CAD FILE 031717

SCALE N/A


SIZE A

2233

**PASTERNAK®**
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

PE71S6331 CAD Drawing

SP6T 0.03 dB Low Insertion Loss Repeatability Relay Latching Switch,
Terminated, DC to 20 GHz, 70W, 24V, Indicators, Self Cut Off, SMA

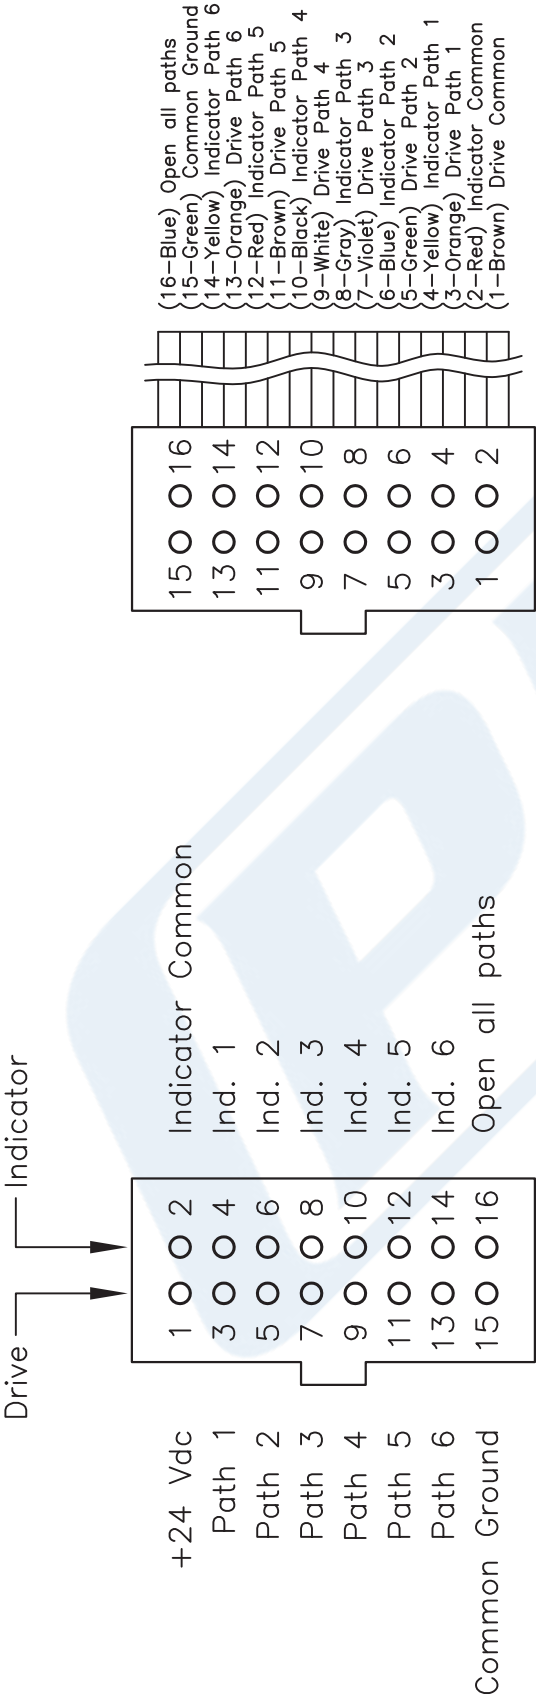

Mating Cable Connector

Switch Connector

STANDARD TOLERANCES
DECIMAL ±0.02

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE	CAGE CODE	53919
PE71S6331	CAD FILE	031717
SCALE	N/A	SIZE A
		2233



PASTERNAK®
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com