



TNC F/F In/Out Coax RF Surge Protector, 800MHz - 2.5GHz,
DC Pass, 300W, IP67, 20kA, Hybrid, Bracket Toward Body

RF Surge Protectors Technical Data Sheet

PE73SP1016

Features

- Surge current of 20kA
- Max Power 300W
- Frequency range from 800 MHz to 2.5 GHz
- TNC female connectors
- Waterproof IP67 rated
- DC Pass
- VSWR <1.1:1
- Low insertion loss
- CE & RoHS compliant

Applications

- GPS systems
- Active antenna systems

Description

RF surge protector (also known as lightning arrester) PE73SP1016 from Pasternack, utilizing a patented hybrid protection technology integrating a silicon avalanche suppression diode (SASD) and a MOV and gas tube, enables a quick response to a lightning surge to protect critical hardware while maintaining the RF performance. This RF surge protector component is manufactured in a coaxial in-line design with wide operating frequency range. All Pasternack RF surge protector products are available in stock with same day shipping.

Electrical Specifications

Surge Protector Type
DC Handling

Hybrid
DC Pass

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.8		2.5	GHz
Impedance		50		Ohms
VSWR			1.1:1	
Return Loss			26	dB
Insertion Loss			0.1	dB
Input Power, CW			300	Watts
Surge Current IEC 61000-4-5 8/20μs Waveform			20,000	Amps
Turn On Voltage		16.5		Volts
Throughput Energy FOR 3kA @ 8/20μs WAVEFORM			500	μJ

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC F/F In/Out Coax RF Surge Protector, 800MHz - 2.5GHz, DC Pass, 300W, IP67, 20kA, Hybrid, Bracket Toward Body PE73SP1016](#)



TNC F/F In/Out Coax RF Surge Protector, 800MHz - 2.5GHz,
DC Pass, 300W, IP67, 20kA, Hybrid, Bracket Toward Body

RF Surge Protectors Technical Data Sheet

PE73SP1016

Mechanical Specifications

Configuration

Input Connector

TNC Female

Output Connector

TNC Female

Environmental Specifications

Temperature

Operating Range

-50 to 85 deg C

Ingress Protection (IP) Rating

IP 67

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:


TNC F/F In/Out Coax RF Surge Protector, 800MHz - 2.5GHz, DC Pass, 300W, IP67, 20kA, Hybrid, Bracket Toward Body from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC F/F In/Out Coax RF Surge Protector, 800MHz - 2.5GHz, DC Pass, 300W, IP67, 20kA, Hybrid, Bracket Toward Body PE73SP1016](#)

URL: <https://www.pasternack.com/tnc-surge-protector-2.5ghz-hybrid-pe73sp1016-p.aspx>

PE73SP1016 CAD Drawing

TNC F/F In/Out Coax RF Surge Protector, 800MHz - 2.5GHz, DC Pass, 300W, IP67, 20kA, Hybrid, Bracket Toward Body

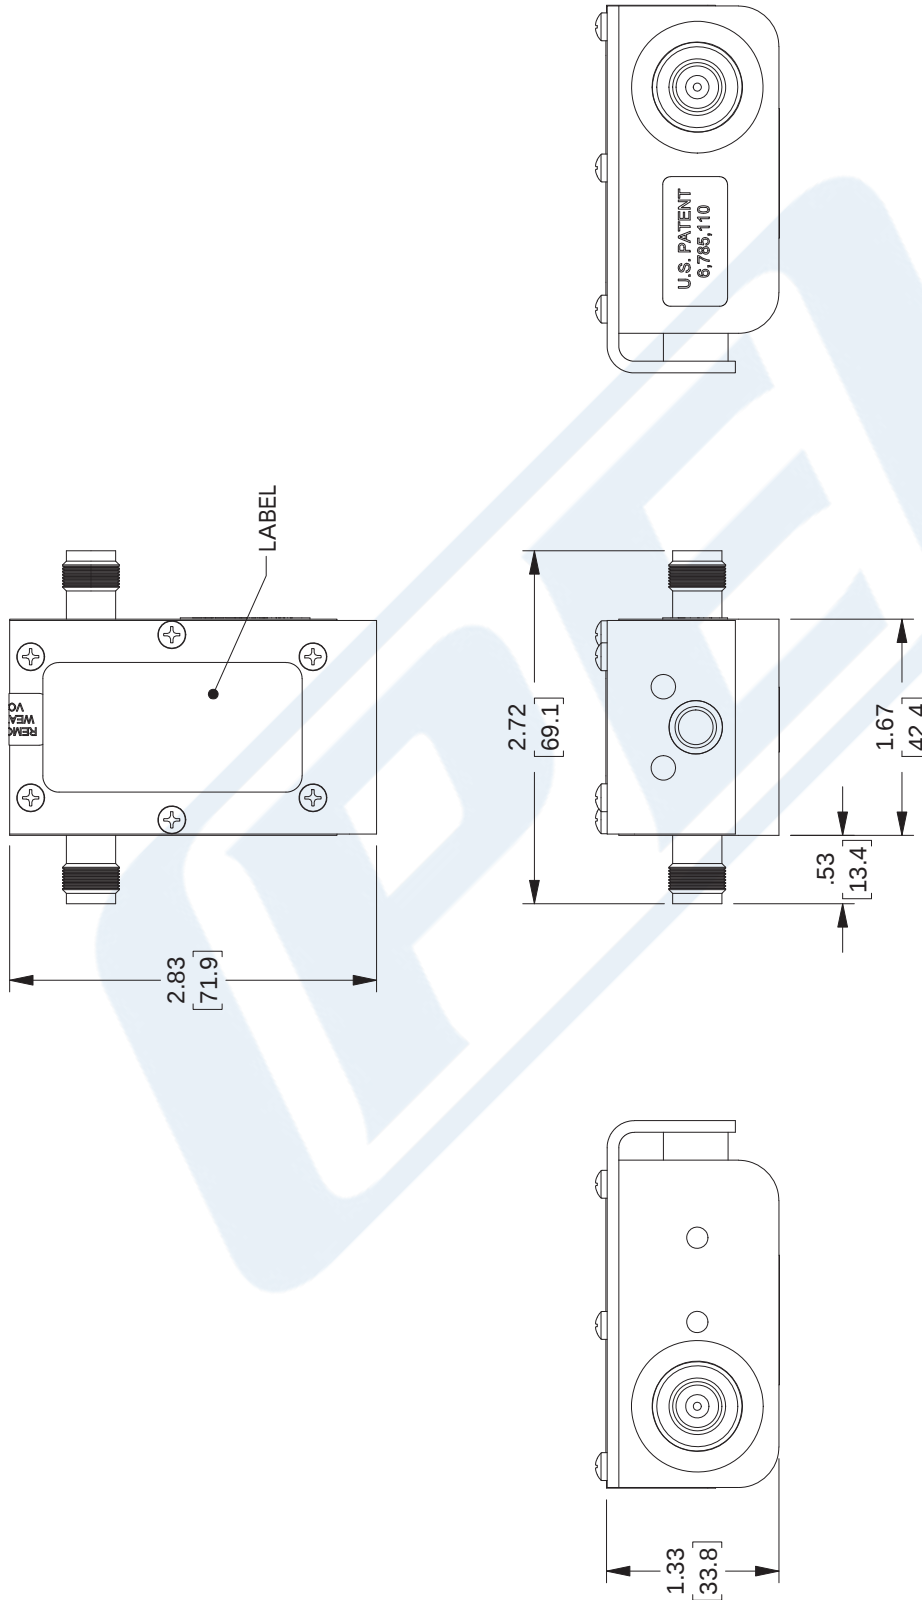

NOTES:

HARDWARE INCLUDED.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

STANDARD	TOLERANCES
.X	±0.2
.XX	±0.01
.XXX	±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES



Pasternack Enterprises, Inc.

P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE73SP1016

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES (mm).

CAGE CODE 53919

CAD FILE 3/22/18

SCALE N/A

SIZE A

256