



Type N F/M In/Out Bulkhead Coax RF Surge Protector, DC - 7GHz and 3GHz - 4GHz, DC Pass, 90W, IP67, 20kA, Gas Discharge Tube, BiDirect

RF Surge Protectors Technical Data Sheet

PE73SP1041

Features

- Surge current of 20kA
- Max Power 90W(RMS)
- Frequency range from DC to 7GHz
- N-type female connector to N-type male connector
- Waterproof IP67 rated
- DC Pass
- VSWR 1.4 typ
- CE & RoHS compliant
- Bi-Directional

Applications

- WiFi
- GPS
- Land mobile radio

Description

RF surge protector (also known as lightning arrester) PE73SP1041 from Pasternack utilizing a proprietary gas tube surge protection technology protects critical hardware from lightening events while maintaining the RF performance. This RF surge protector component is manufactured in a coaxial in-line design with wide operating frequency range. All Pasternack RF surge protector products are available in stock with same day shipping.

Electrical Specifications

Surge Protector Type
DC Handling

Gas Discharge Tube
DC Pass

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		7	GHz
Impedance		50		Ohms
VSWR			1.4:1	
Return Loss			15	dB
Insertion Loss			0.25	dB
Input Power, CW			90	Watts
90W @ 30MHz				
9W @ 3GHz				
Surge Current			20	kA
@ IEC 61000-4-5 8/20μs WAVEFORM				
Turn On Voltage		150		Volts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Type N F/M In/Out Bulkhead Coax RF Surge Protector, DC - 7GHz and 3GHz - 4GHz, DC Pass, 90W, IP67, 20kA, Gas Discharge Tube, BiDirect PE73SP1041](#)



Type N F/M In/Out Bulkhead Coax RF Surge Protector, DC - 7GHz and 3GHz - 4GHz, DC Pass, 90W, IP67, 20kA, Gas Discharge Tube, BiDirect

RF Surge Protectors Technical Data Sheet

PE73SP1041

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 3	3 to 4	4 to 7			GHz
VSWR, Max	1.1:1	1.2:1	1.4:1			

Mechanical Specifications

Configuration

Input Connector

N Female

Output Connector

N Male

Environmental Specifications

Temperature

Operating Range

-55 to +85 deg C

Ingress Protection (IP) Rating

IP 67

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:


Type N F/M In/Out Bulkhead Coax RF Surge Protector, DC - 7GHz and 3GHz - 4GHz, DC Pass, 90W, IP67, 20kA, Gas Discharge Tube, BiDirect from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Type N F/M In/Out Bulkhead Coax RF Surge Protector, DC - 7GHz and 3GHz - 4GHz, DC Pass, 90W, IP67, 20kA, Gas Discharge Tube, BiDirect PE73SP1041](#)

URL: <https://www.pasternack.com/type-n-surge-protector-7ghz-4ghz-gas-discharge-tube-pe73sp1041-p.aspx>

PE73SP1041 CAD Drawing

Type N F/M In/Out Bulkhead Coax RF Surge Protector, DC - 7GHz and 3GHz
- 4GHz, DC Pass, 90W, IP67, 20kA, Gas Discharge Tube, BiDirect

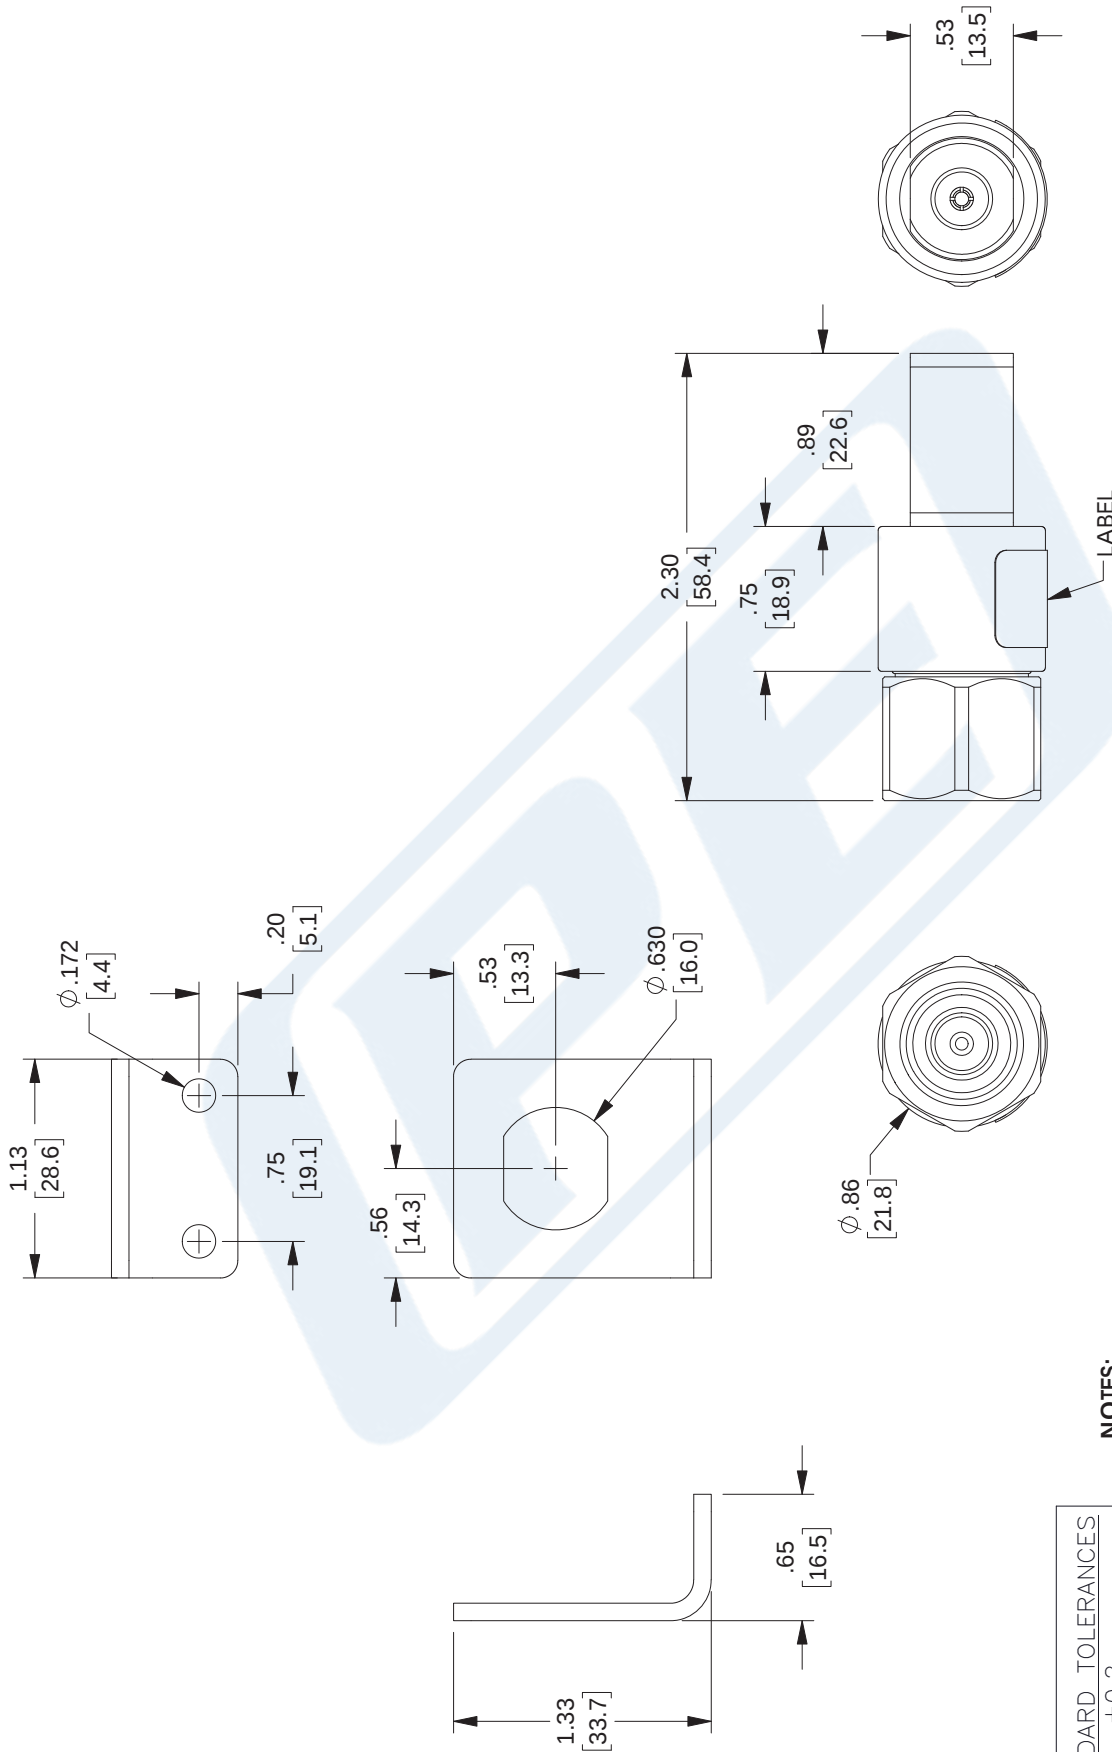

NOTES:

BRACKET AND HARDWARE INCLUDED.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

STANDARD TOLERANCES

.X ±0.2
.XX ±0.01
.XXX ±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES



Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE73SP1041

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

CAGE CODE 53919

CAD FILE MMDDYY

SCALE N/A

SIZE A

XXXX