



10 dB Fixed Attenuator, 4.3-10 Male to 4.3-10 Female Rated to 15 Watts Up to 6 GHz

RF Fixed Attenuators Technical Data Sheet

PE7AP1001-10

Features

- Bidirectional
- DC to 6 GHz Frequency Range
- Attenuation 10 dB \pm 0.3 dB
- Max Power 15 Watts (CW)
- VSWR < 1.15:1

Applications

- Instrumentation
- Precision measurements
- Prototyping and characterization
- Production systems

Description

Pasternack carries a wide range of fixed attenuators with a broad selection of attenuation levels, frequency ranges, and power dissipation ranges. RF microwave attenuators (also known as RF pads) lower the amplitude of a signal (attenuate) a known amount and can be used in a wide variety of applications. These attenuator pads are used when a signal needs to be reduced to protect measurement equipment or other circuitry, to extend the range of power meters and amplifiers, and to impedance match circuits by reducing the VSWR seen by adjacent components. RF attenuators can prevent signal overload in amplifiers, receivers and detectors, adjusting the signal level to a range that is optimal.

Few RF components are as commonly used as fixed coaxial attenuators, and Pasternack carries one of the largest in-stock varieties and ships them same day. The 10 dB Fixed Attenuator PE7AP1001-10 is rated to 15 Watts and operates from DC to 6 GHz. The versatile coaxial package uses 4.3-10 male to 4.3-10 female connectors and is also REACH and RoHS compliant.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
Impedance		50		Ohms
Nominal Attenuation		10		dB
Attenuation Accuracy			\pm 0.3	dB
VSWR			1.15:1	
Input Power, CW			15	Watts
Input Power, Peak 1 μ s, 1%			250	Watts

Mechanical Specifications

Size

Configuration

Design Fixed
Package Style Connectorized

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 dB Fixed Attenuator, 4.3-10 Male to 4.3-10 Female Rated to 15 Watts Up to 6 GHz PE7AP1001-10](#)



10 dB Fixed Attenuator, 4.3-10 Male to 4.3-10 Female
Rated to 15 Watts Up to 6 GHz

RF Fixed Attenuators Technical Data Sheet

PE7AP1001-10

Connectors

Description	Connector 1	Connector 2
Type	4.3-10 Male	4.3-10 Female

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C

Storage Range

-40 to +85 deg C

Ingress Protection (IP) Rating


IP67

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data

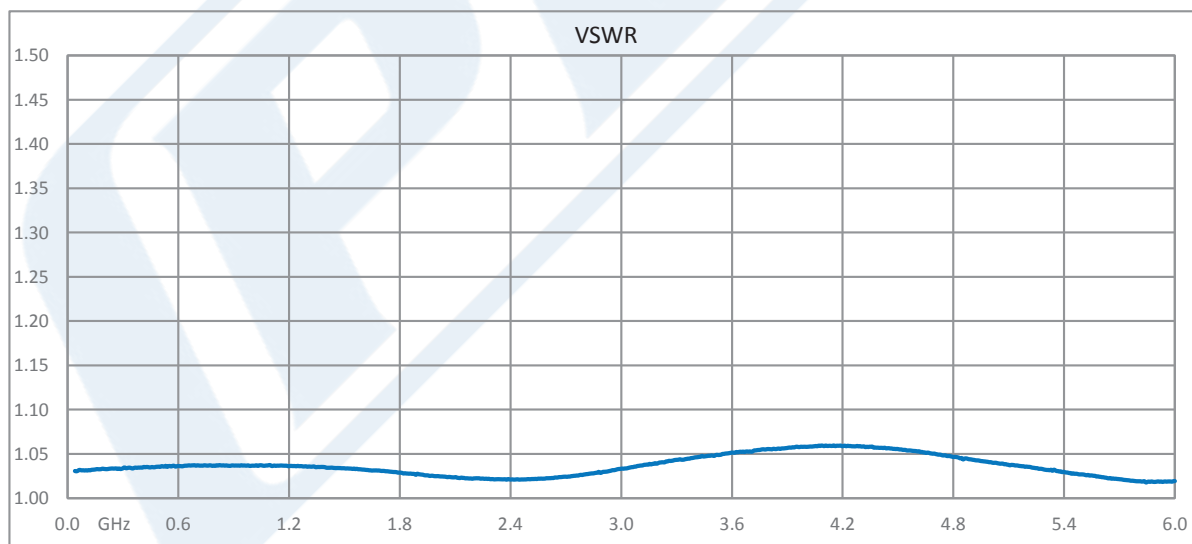



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 dB Fixed Attenuator, 4.3-10 Male to 4.3-10 Female Rated to 15 Watts Up to 6 GHz PE7AP1001-10](#)



10 dB Fixed Attenuator, 4.3-10 Male to 4.3-10 Female
Rated to 15 Watts Up to 6 GHz

RF Fixed Attenuators Technical Data Sheet

PE7AP1001-10

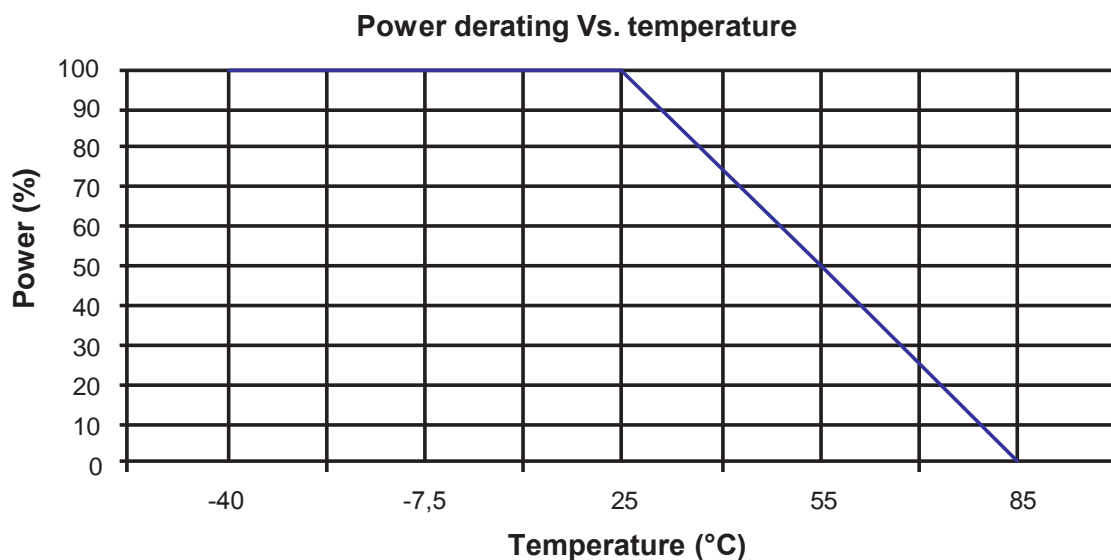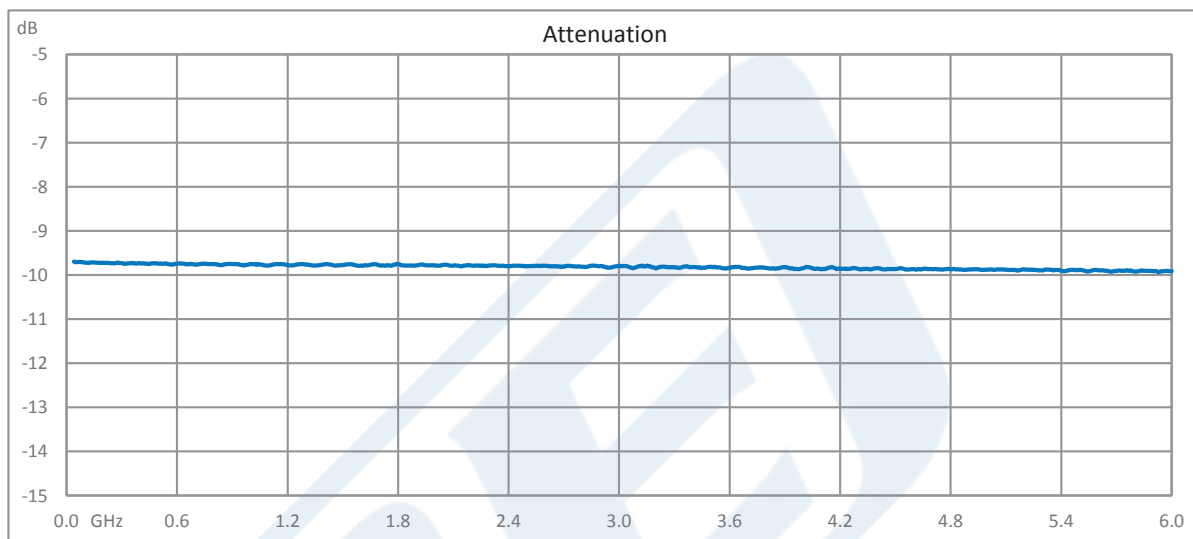

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 dB Fixed Attenuator, 4.3-10 Male to 4.3-10 Female Rated to 15 Watts Up to 6 GHz PE7AP1001-10](#)



10 dB Fixed Attenuator, 4.3-10 Male to 4.3-10 Female
Rated to 15 Watts Up to 6 GHz

RF Fixed Attenuators Technical Data Sheet

PE7AP1001-10

10 dB Fixed Attenuator, 4.3-10 Male to 4.3-10 Female Rated to 15 Watts Up to 6 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 dB Fixed Attenuator, 4.3-10 Male to 4.3-10 Female Rated to 15 Watts Up to 6 GHz PE7AP1001-10](https://www.pasternack.com/10db-fixed-4.3-10-male-4.3-10-female-15-watts-attenuator-pe7ap1001-10.aspx)

URL: <https://www.pasternack.com/10db-fixed-4.3-10-male-4.3-10-female-15-watts-attenuator-pe7ap1001-10.aspx>

