

Limiters Technical Data Sheet

Electrical Specifications

Internal DC Return

Description	Minimum	Typical	Maximum	Units
Frequency Range	2		4	GHz
Insertion Loss		0.8		dB
Input VSWR		1.5:1		
Output VSWR		1.5:1		
Leakage (CW)			+18.5	dBm
Leakage (Peak)			+23	dBm
Recovery Time		20		ns
Input Power (CW)			1	Watt
Input Power (Peak) @1us pulse, 0.1% Duty Cyc	le		100	Watt
Derated to 20% @ +125°C				
Limiting Threshold		+12		dBm

Electrical Specification Notes:

Values at 25°C, sea level. Specification @ +25°C and -10 dBm input power.

Mechanical Specifications

Size Length Width Height Weight Body Material and Plating

Configuration

Style Package Style Impedance Connector 1 Connector 2

Environmental Specifications

Temperature Operating Range Storage Range	-55 to +90 deg C -65 to +125 deg C
Shock	50 G's, 11 msec

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: High Power Limiter, SMA, 100W Peak Power, 20 ns Recovery, 18.5 dBm Flat Leakage, 2 GHz to 4 GHz PE8020

1.21 in [30.73 mm]

0.31 in [7.87 mm]

0.31 in [7.87 mm]

0.023 lbs [10.43 g]

PIN-PIN Limiter

50 Ohms

SMA Male

SMA Female

Connectorized Module

Passivated Stainless Steel

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (868) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com



PE8020





Limiters Technical Data Sheet

PE8020

Vibration

20G, 100 to 2000Hz

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

• Values at 25°C, sea level.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: High Power Limiter, SMA, 100W Peak Power, 20 ns Recovery, 18.5 dBm Flat Leakage, 2 GHz to 4 GHz PE8020


Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (868) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451

Sales@Pastemack.com + Techsupport@Pastemack.com



Limiters Technical Data Sheet

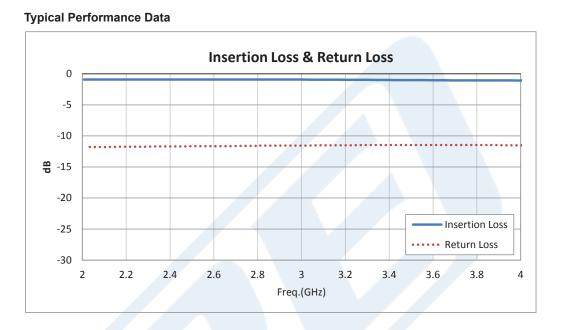

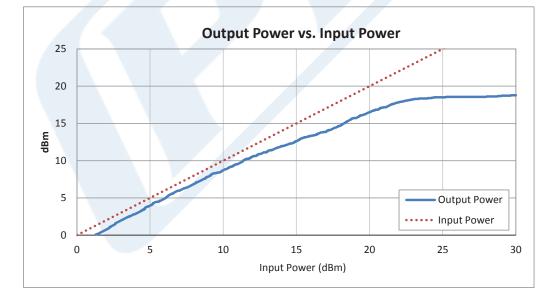

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: High Power Limiter, SMA, 100W Peak Power, 20 ns Recovery, 18.5 dBm Flat Leakage, 2 GHz to 4 GHz PE8020

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451

Sales@Pastemack.com • Techsupport@Pastemack.com



PE8020





Limiters Technical Data Sheet

PE8020

High Power Limiter, SMA, 100W Peak Power, 20 ns Recovery, 18.5 dBm Flat Leakage, 2 GHz to 4 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: High Power Limiter, SMA, 100W Peak Power, 20 ns Recovery, 18.5 dBm Flat Leakage, 2 GHz to 4 GHz PE8020

URL: https://www.pasternack.com/sma-limiter-pin-pin-18.5-dbm-4-ghz-pe8020-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE8020 CAD Drawing High Power Limiter, SMA, 100W Peak Power, 20 ns Recovery,

18.5 dBm Flat Leakage, 2 GHz to 4 GHz

