



SMA High Power Limiter, 200 Watts Peak Power, 100 ns Recovery, 14 dBm Flat Leakage, 2 GHz to 18 GHz

Limiters - PE80L2001

Features

- High Speed 200 Watt Peak Limit
- 2 GHz to 18 GHz Frequency Range
- Insertion Loss @ -10 dBm 2 dB Max
- VSWR 2.0:1
- Leakage @ 1 Watt CW +14 dBm Max
- Recovery Time 20 ns typical
- Limiting Threshold +6 dBm
- High Power Handling

Applications

- Electronic Warfare
- Test & Measurement
- Military & Space
- Military Communication Systems
- Stabilizing generator outputs
- Reducing amplitude variations
- Protects low noise amplifiers and other devices from ESD or input power damage
- Receiver Protection
- Weapon systems

Description

The PE80L2001 is a High Power Limiter that operates from 2 GHz to 18 GHz. The Limiter handles 200 W Peak Power and operates from -54 Deg C to + 125 Deg C. The RF Input has an SMA Male connector and the RF Output has an SMA Female connector.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	2		18	GHz
Insertion Loss @ Pin=-10 dBm			2	dB
Input VSWR			2:1	
Output VSWR			2:1	
Leakage (CW) @ 1 Watt CW			+14	dBm
Recovery Time @ Pin=27 dBm			100	ns
Input Power (CW)			1	Watt
Derated by 20% @ +125°C				
Input Power (Peak) @ 1us pulse, 0.1% Duty Cycle			200	Watt
Limiting Threshold		+6		dBm

Electrical Specification Notes:
Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA High Power Limiter, 200 Watts Peak Power, 100 ns Recovery, 14 dBm Flat Leakage, 2 GHz to 18 GHz PE80L2001](#)



SMA High Power Limiter, 200 Watts Peak Power, 100 ns
Recovery, 14 dBm Flat Leakage, 2 GHz to 18 GHz

Limiters - PE80L2001

Mechanical Specifications

Size

Length	0.75 in [19.05 mm]
Width	1 in [25.4 mm]
Height	0.3 in [7.62 mm]
Weight	0.033 lbs [14.97 g]

Configuration

Style	High Power Limiter
Connector 1	SMA Male
Connector 2	SMA Female

Environmental Specifications

Temperature

Operating Range	-55 to +125 deg C
Storage Range	-65 to +125 deg C

Humidity

Shock

Vibration

Altitude

Temperature Cycle

Fungus

Salt Fog

ESD Sensitivity

MIL-STD-202F, METHOD 103B COND. B

MIL-STD-202F, METHOD 213B COND. B

MIL-STD-202F, METHOD 204D COND. B

MIL-STD-202F, METHOD 105C COND. B

MIL-STD-202F, METHOD 107D COND. A

MIL-STD-810F, METHOD 508.5

MIL-STD-202F, METHOD 101D+EST Cond.B

Transport material in Approved ESD bags. Handle only
in approved ESD Workstation.



Compliance Certifications (visit www.Pasternack.com for current document)

Not RoHS Compliant

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA High Power Limiter, 200 Watts Peak Power, 100 ns Recovery, 14 dBm Flat Leakage, 2 GHz to 18 GHz PE80L2001](#)




SMA High Power Limiter, 200 Watts Peak Power, 100 ns Recovery, 14 dBm Flat Leakage, 2 GHz to 18 GHz

Limiters - PE80L2001

Typical Performance Data

Insertion Loss and Return Loss

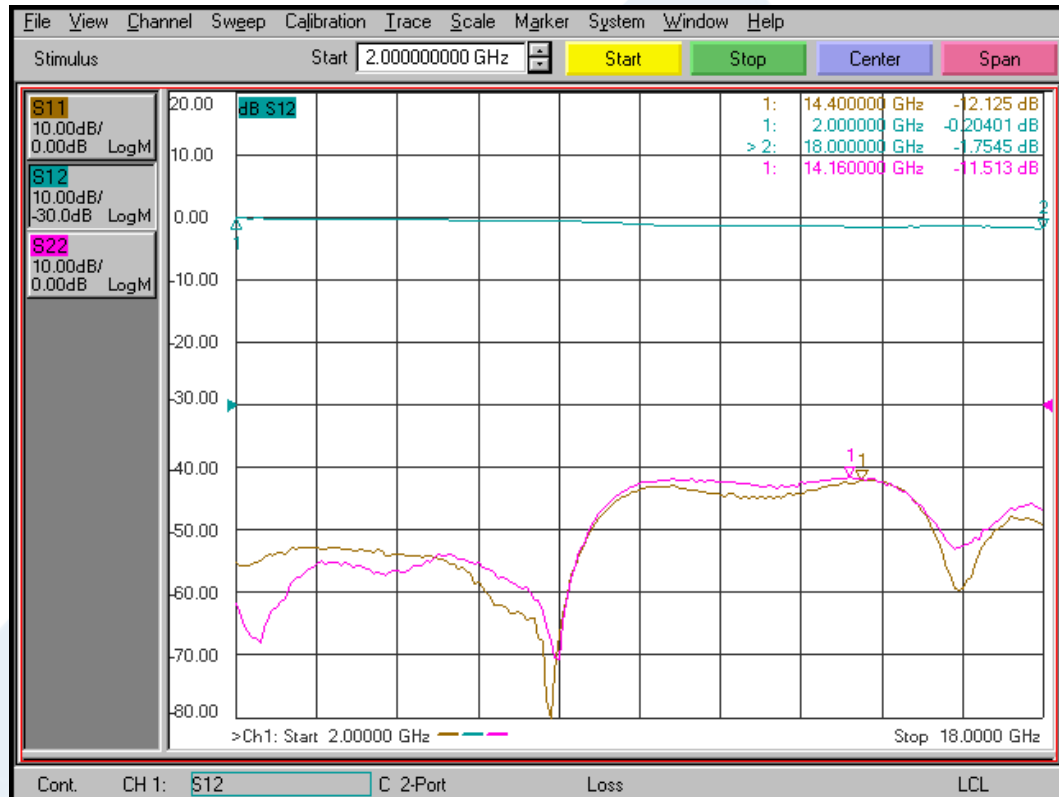


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA High Power Limiter, 200 Watts Peak Power, 100 ns Recovery, 14 dBm Flat Leakage, 2 GHz to 18 GHz PE80L2001](#)



SMA High Power Limiter, 200 Watts Peak Power, 100 ns Recovery, 14 dBm Flat Leakage, 2 GHz to 18 GHz

Limiters - PE80L2001

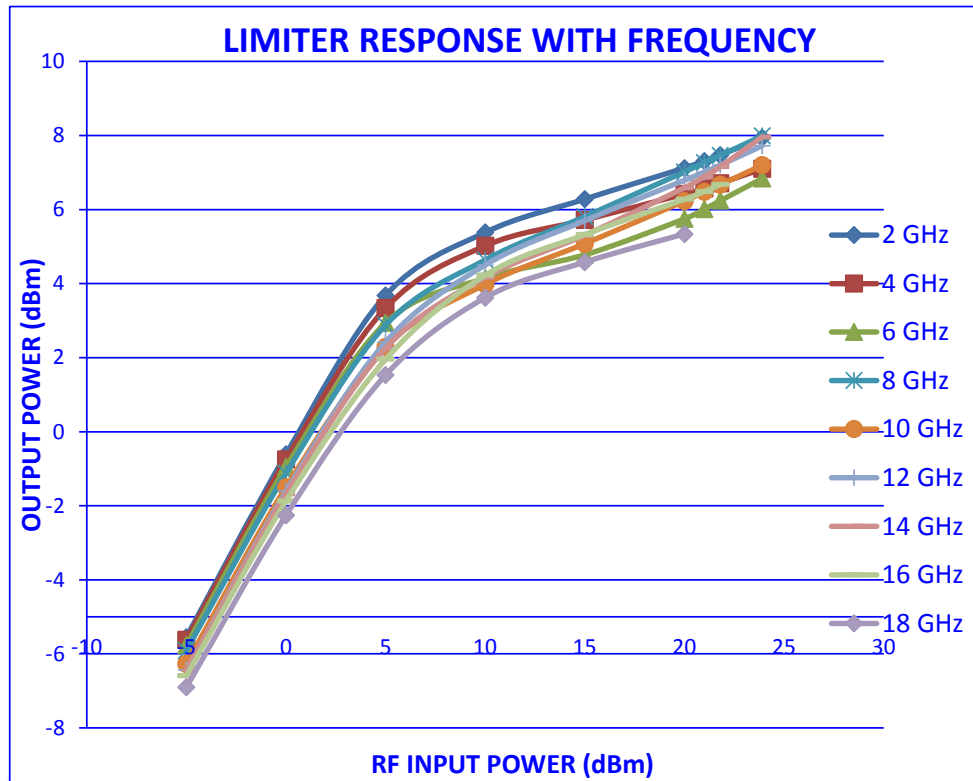

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA High Power Limiter, 200 Watts Peak Power, 100 ns Recovery, 14 dBm Flat Leakage, 2 GHz to 18 GHz PE80L2001](#)




SMA High Power Limiter, 200 Watts Peak Power, 100 ns Recovery, 14 dBm Flat Leakage, 2 GHz to 18 GHz

Limiters - PE80L2001

Recovery Time

100ns per Div.

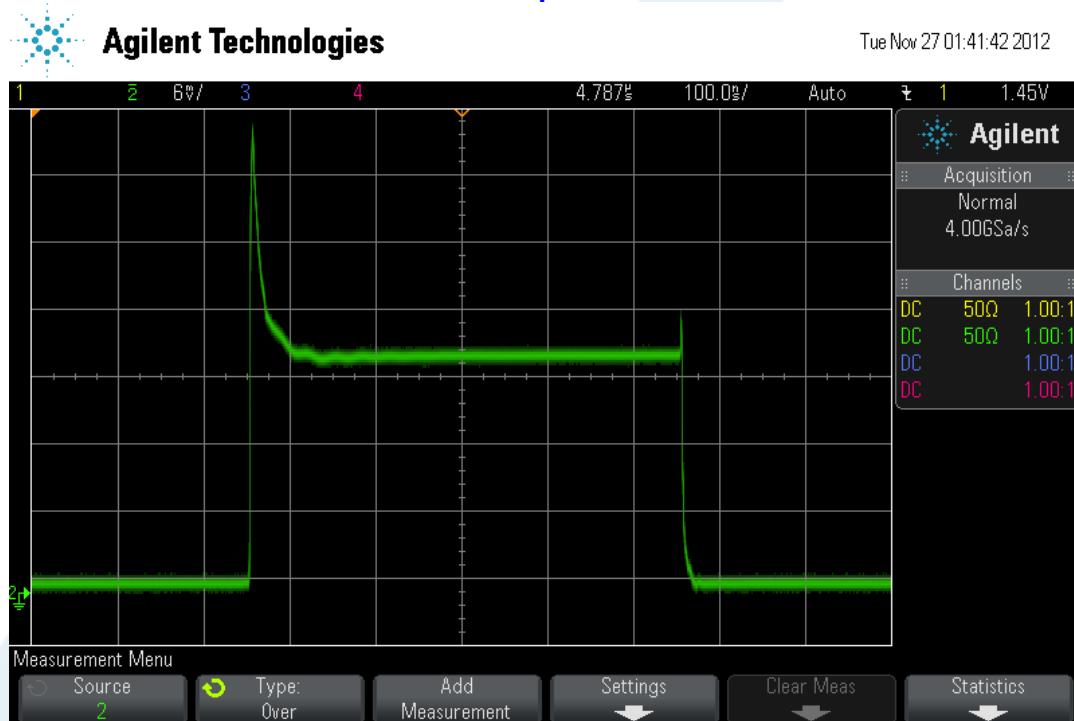

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA High Power Limiter, 200 Watts Peak Power, 100 ns Recovery, 14 dBm Flat Leakage, 2 GHz to 18 GHz PE80L2001](#)



SMA High Power Limiter, 200 Watts Peak Power, 100 ns Recovery, 14 dBm Flat Leakage, 2 GHz to 18 GHz

Limiters - PE80L2001

SMA High Power Limiter, 200 Watts Peak Power, 100 ns Recovery, 14 dBm Flat Leakage, 2 GHz to 18 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA High Power Limiter, 200 Watts Peak Power, 100 ns Recovery, 14 dBm Flat Leakage, 2 GHz to 18 GHz PE80L2001](http://www.pasternack.com/sma-limiter-high-power-100-ns-10-dbm-18-ghz-pe80l2001-p.aspx)

URL: <http://www.pasternack.com/sma-limiter-high-power-100-ns-10-dbm-18-ghz-pe80l2001-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE80L2001 CAD Drawing

SMA High Power Limiter, 200 Watts Peak Power, 100 ns
Recovery, 14 dBm Flat Leakage, 2 GHz to 18 GHz

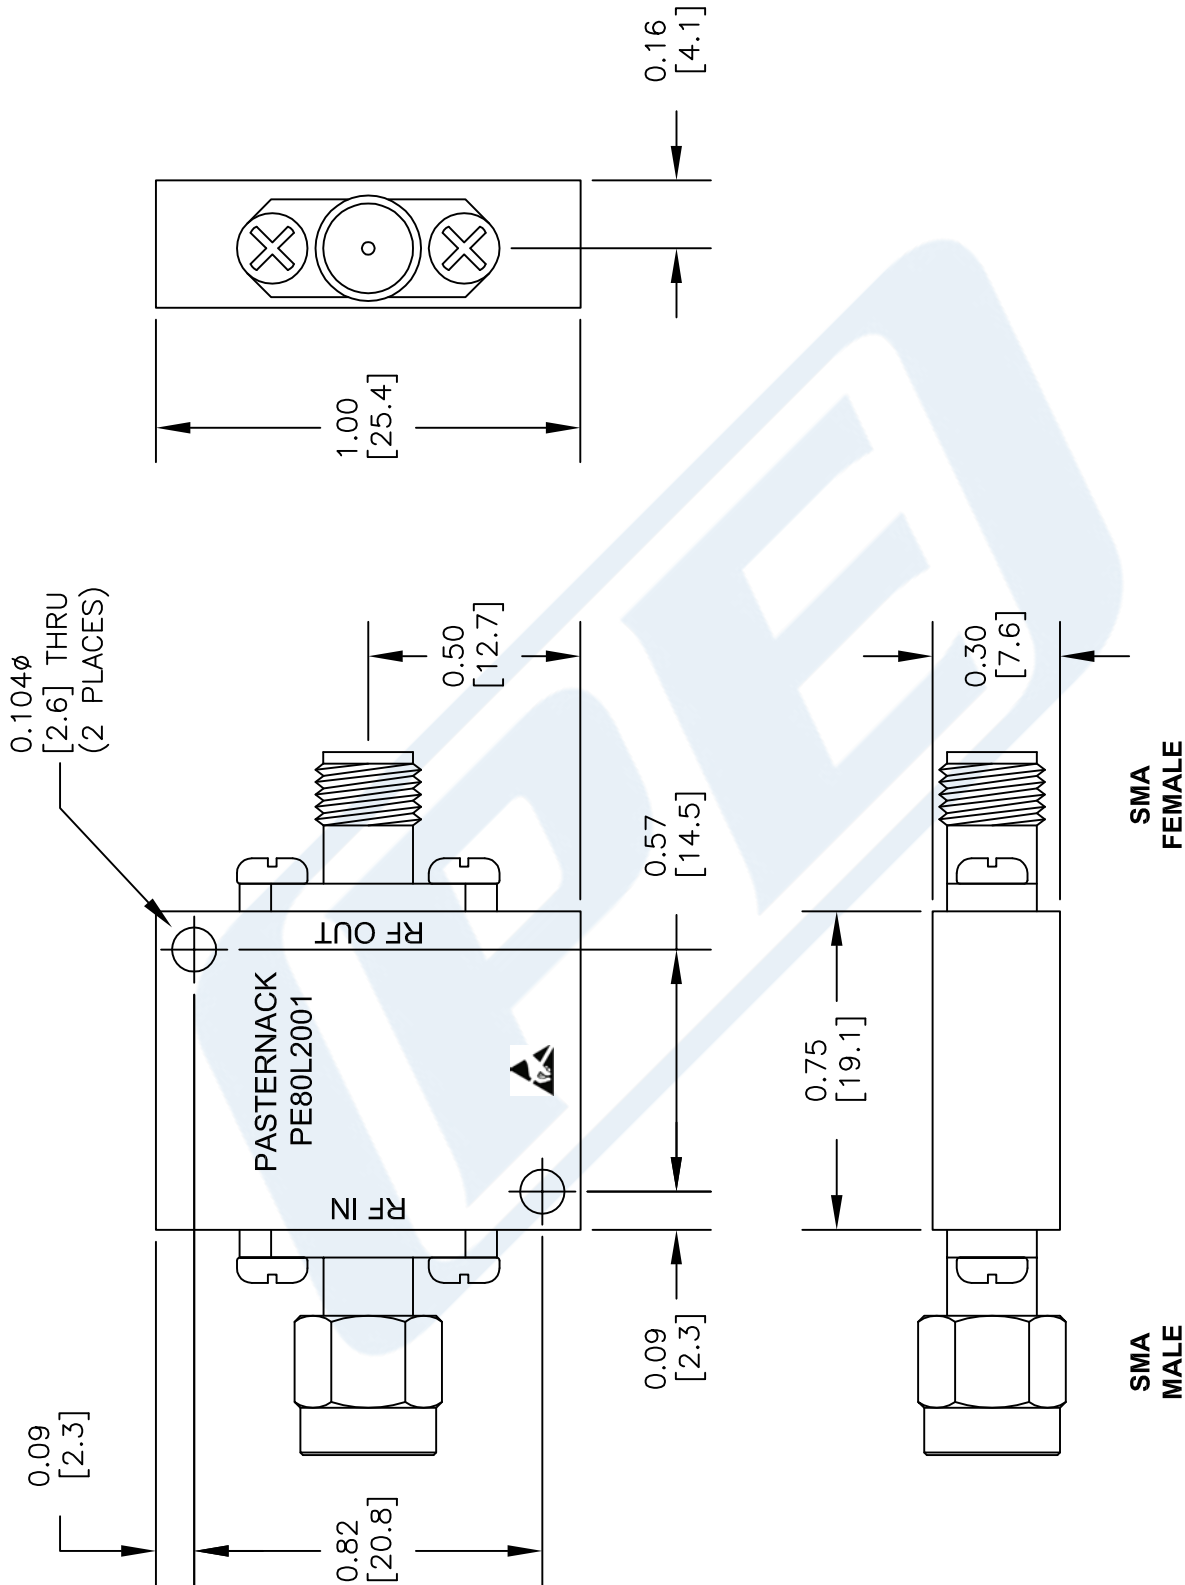

DWG TITLE

PE80L2001

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 122214

SCALE N/A

SIZE A

150