



8 GHz to 18 GHz, Bi-Phase Modulator, 0/180 Degrees,
TTL Control, 75nsec Speed, SMA

TECHNICAL DATA SHEET

PE86GM2006

The PE86GM2006 is a 0° to 180° Bi-Phase Modulator that operates across a frequency range from 8 GHz to 18 GHz. This modulator takes a TTL level digital bit stream and encodes it onto the RF carrier using 2 Phase Shift Keying (2PSK). 2 Phase Shift Keying utilizes 2 phases which are separated by 180°. Impressive typical performance includes low insertion loss of 3 dB, < 75 nsec switching speed, 20 dB carrier suppression, and 0.5W CW maximum RF input power. The design is bidirectional with input and output RF ports, and employs dual bias voltages (+5/-5 Vdc) and integrated TTL processing to phase modulate the control data onto the RF, and operates across a wide temperature range of -55°C to +85°C. The rugged and compact package uses TTL, Bias, Ground pins, and field replaceable SMA Female connectors. The high reliability design meets MIL-STD-202 environmental test conditions for Humidity, Shock, Vibration, Altitude, and Temperature Cycle.

Features

- 0° to 180° Bi-Phase Modulator module
- Binary Phase Shift Keying (BPSK) Modulation
- Frequency Range: 8 GHz to 18 GHz
- Insertion Loss: 3 dB typ
- Switching Speed: < 75 nsec
- Carrier Suppression: 20 dB
- Compact Package Design
- Field Replaceable SMA Connectors
- Dual Bias Voltage: +5/-5 Vdc
- Integrated TTL Driver
- -55°C to +85°C Operating Temperature
- Designed to meet MIL-STD-202 Test Conditions
- Bi-Directional Operation

Applications

- Communication Systems
- Microwave Radio
- Radar
- High Data Rate Test & Measurement
- Serial Data Transmission
- Basestation Infrastructure

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	8		18	GHz
RF Input Power (CW)			+20	dBm
Maximum Peak RF (Survival) 1μs Pulse Width			0.5	Watts
Impedance		50		Ohms
VSWR		2:1		
Insertion Loss		3	3.5	dB
Carrier Suppression		20		dB
Switching Speed			75	ns
Phase State (Off)		0		degrees
Phase State (On)		180		degrees
Bias Voltage (+)		5		Volts
Bias Voltage (-)		-5		Volts
Bias Current @ +5 VDC		34	75	mA
Bias Current @ -5 VDC		8	20	mA

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [8 GHz to 18 GHz, Bi-Phase Modulator, 0/180 Degrees, TTL Control, 75nsec Speed, SMA PE86GM2006](#)



8 GHz to 18 GHz, Bi-Phase Modulator, 0/180 Degrees,
TTL Control, 75nsec Speed, SMA

TECHNICAL DATA SHEET

PE86GM2006

Mechanical Specifications

Size

Length	1 in	[25.4mm]
Width	1 in	[25.4 mm]
Height	0.5 in	[12.7 mm]
Weight	0.125 lbs	[56.7 g]

Configuration

Design	Bi-Phase Modulator
Connector Option	Field Replaceable
RF Connector	SMA Female

Environmental Specifications

Temperature

Operating Range	-55°C to +85°C
Storage Range	-65°C to +125°C

Humidity

Shock	MIL-STD-202F, Method 103B Cond. B
Vibration	MIL-STD-202F, Method 213B Cond. B
Altitude	MIL-STD-202F, Method 204D Cond. B
Temperature Cycle	MIL-STD-202F, Method 105C Cond. B
	MIL-STD-202F, Method 107D Cond. A

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [8 GHz to 18 GHz, Bi-Phase Modulator, 0/180 Degrees, TTL Control, 75nsec Speed, SMA PE86GM2006](#)




8 GHz to 18 GHz, Bi-Phase Modulator, 0/180 Degrees,
TTL Control, 75nsec Speed, SMA

TECHNICAL DATA SHEET

PE86GM2006

Typical Performance Data

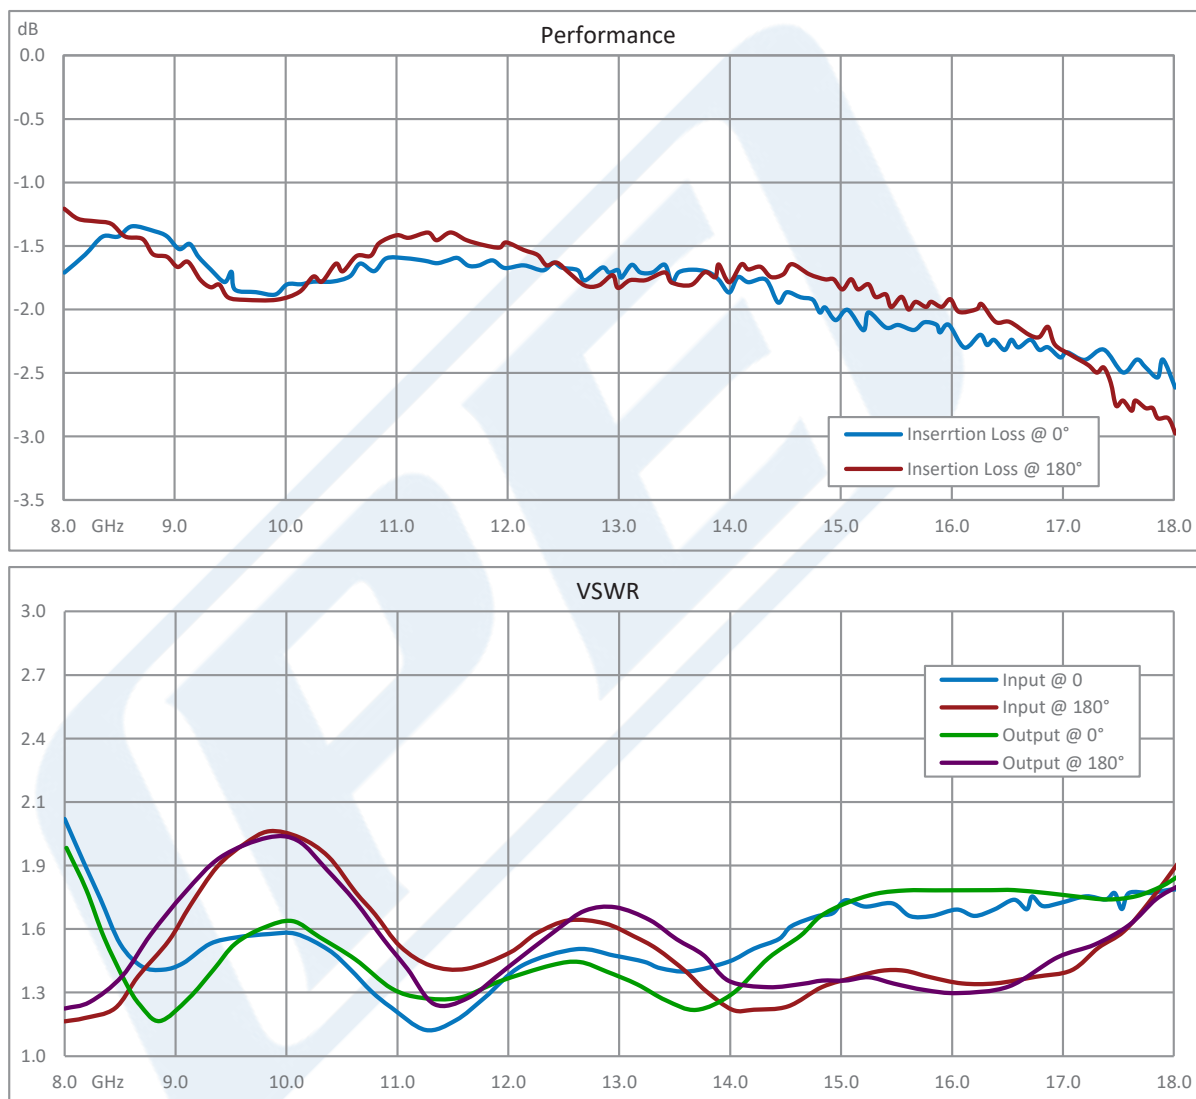


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [8 GHz to 18 GHz, Bi-Phase Modulator, 0/180 Degrees, TTL Control, 75nsec Speed, SMA PE86GM2006](#)



8 GHz to 18 GHz, Bi-Phase Modulator, 0/180 Degrees,
TTL Control, 75nsec Speed, SMA

TECHNICAL DATA SHEET

PE86GM2006

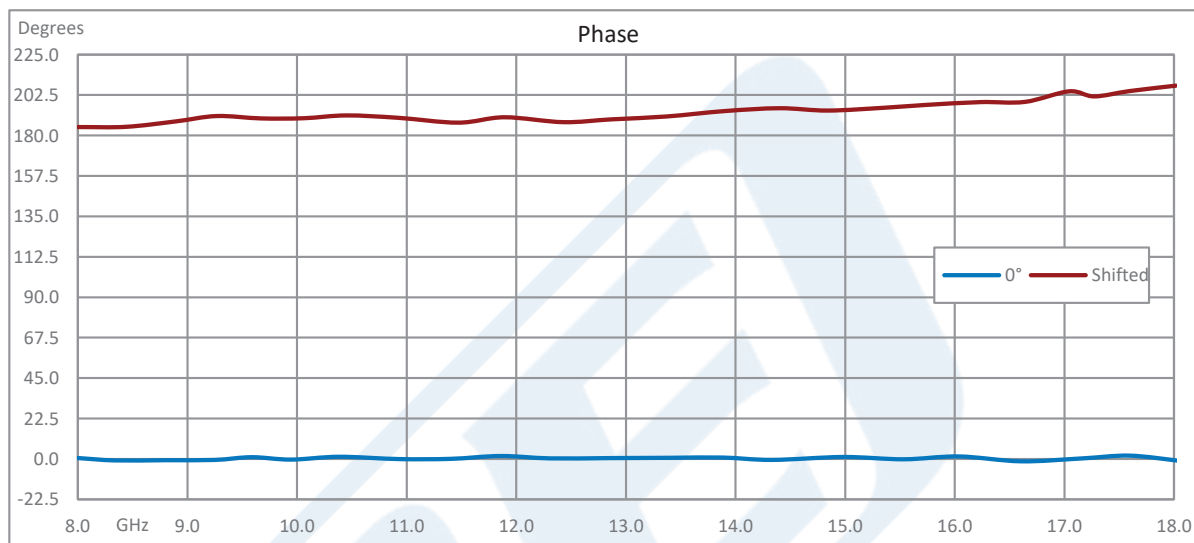

8 GHz to 18 GHz, Bi-Phase Modulator, 0/180 Degrees, TTL Control, 75nsec Speed, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [8 GHz to 18 GHz, Bi-Phase Modulator, 0/180 Degrees, TTL Control, 75nsec Speed, SMA PE86GM2006](https://www.pasternack.com/pe86gm2006-p.aspx)

URL: <https://www.pasternack.com/pe86gm2006-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

8 GHz to 18 GHz, Bi-Phase Modulator, 0/180 Degrees, TTL Control, 75nsec Speed, SMA

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/06/19	T.GALLA

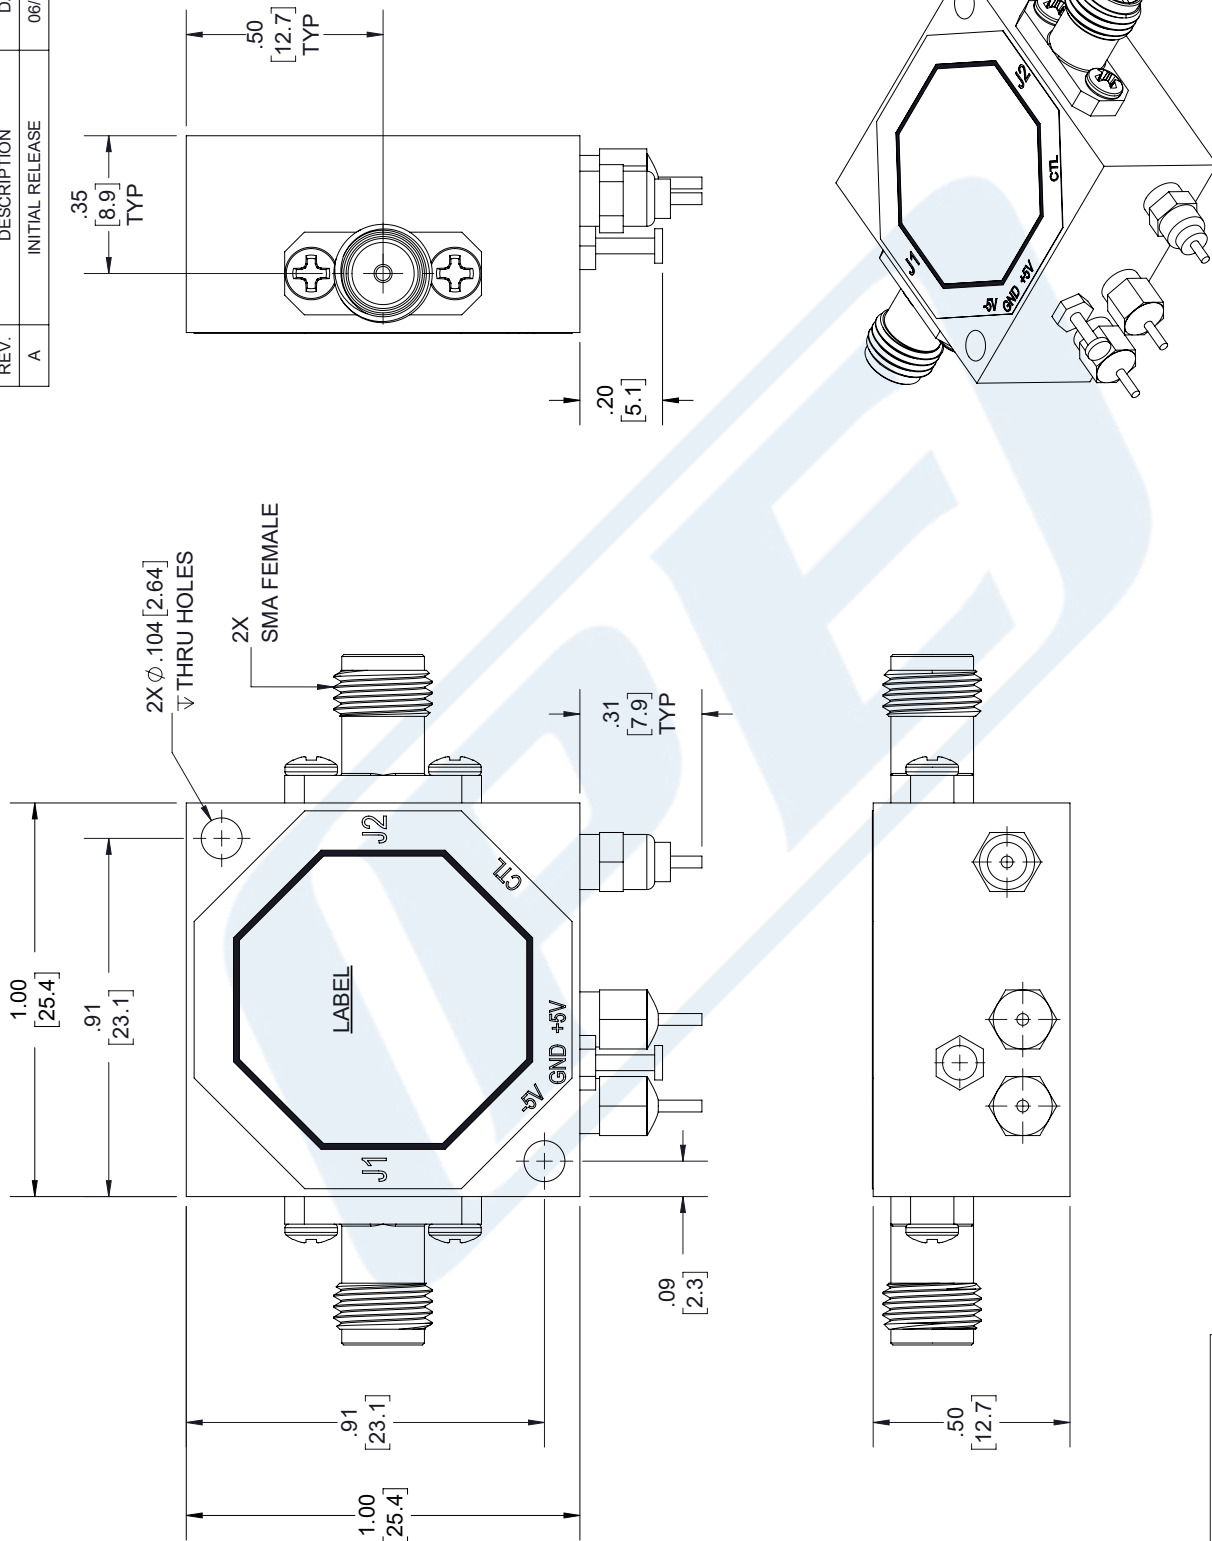

LABEL:

PE PASTERNAK
an INFINITI® brand

PHASE SHIFTER
MODEL NO:
PE86GM2006
SERIAL NO:
PLXXXXXXXXXX



UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS	
TOLERANCES:	
X±.2	[.08]
XX±.01	[.25]
XXX±.005	[.13]
FRACTIONS ± 1/32	ANGLES ± 1°
ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.	
THIRD-ANGLE PROJECTION	

PE PASTERNAK
an INFINITI® brand

Pasternack Enterprises, Inc.
P.O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
www.pasternack.com | e-mail: sales@pasternack.com

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED.	SHEET 1 OF 1	N/A
--	--------------	-----

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.