



5 Section Lowpass Filter With SMA Female Connectors
Operating From DC to 1,000 MHz With a 1000 MHz Passband

TECHNICAL DATA SHEET

PE8720

Configuration

| | |
|-------------------------------|-----------------|
| Design | Low Pass Filter |
| Connector 1 | SMA Female |
| Connector 2 | SMA Female |
| Passband Frequency Range, MHz | DC to 1,000 |

Electrical Specifications

| | |
|---------------------------------|-------------|
| Passband Minimum Frequency, KHz | 0 |
| Passband Maximum Frequency, MHz | 1000 |
| Useable Frequency Range, MHz | DC to 1,000 |
| Impedance, Ohms | 50 |
| Maximum Insertion Loss, dB | 1 |
| Passband Maximum VSWR | 1.5:1 |
| Maximum Input Power, Watts | 10 |
| Rejection at 1.5 GHz | 40 dB |
| Rejection at 2 GHz | 60 dB |

Mechanical Specifications

Size

| | |
|-----------------|--------------|
| Length, in [mm] | 1.1 [27.94] |
| Width, in [mm] | 0.75 [19.05] |
| Height, in [mm] | 0.65 [16.51] |

Connector 1

| | |
|------|------------|
| Type | SMA Female |
|------|------------|

Connector 2

| | |
|------|------------|
| Type | SMA Female |
|------|------------|

Compliance Certifications (visit www.Pasternack.com for current document)

| | |
|-----------------|------------|
| RoHS Compliant | Yes |
| REACH Compliant | 06/18/2012 |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [5 Section Lowpass Filter With SMA Female Connectors Operating From DC to 1,000 MHz With a 1000 MHz Passband PE8720](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.





5 Section Lowpass Filter With SMA Female Connectors
Operating From DC to 1,000 MHz With a 1000 MHz Passband

TECHNICAL DATA SHEET

PE8720

Plotted and Other Data

Notes:

Values at 25 °C, sea level

5 Section Lowpass Filter With SMA Female Connectors Operating From DC to 1,000 MHz With a 1000 MHz Passband from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [5 Section Lowpass Filter With SMA Female Connectors Operating From DC to 1,000 MHz With a 1000 MHz Passband PE8720](#)

URL: <http://www.pasternack.com/5-section-low-pass-filter-0-mhz-1000-mhz-passband-1000-mhz-pe8720-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE8720 CAD Drawing

5 Section Lowpass Filter With SMA Female Connectors Operating
From DC to 1,000 MHz With a 1000 MHz Passband

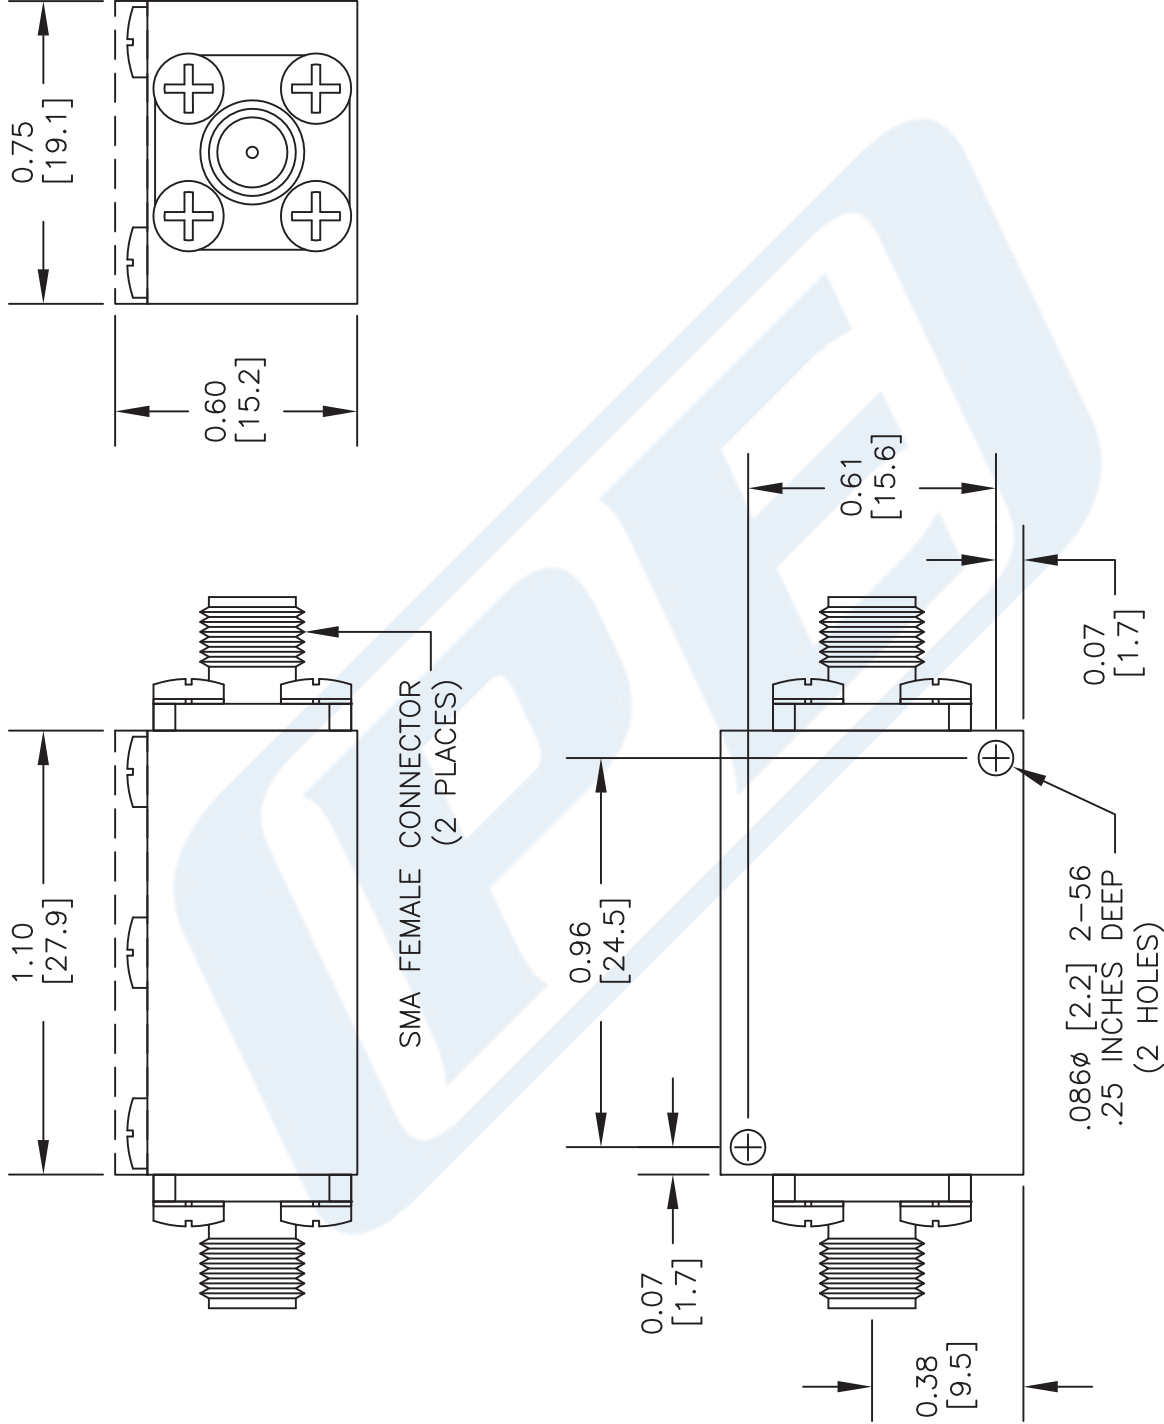

DWG TITLE

PE8720

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

PASTERNAK ENTERPRISES, INC.

P.O. BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com

COAXIAL & FIBER OPTICS



ESTABLISHED 1972

FSCM NO. 53919

CAD FILE 042712

SCALE N/A

SIZE A

2233