

PASTERNACK DC to 1100F 1017 D C 1547

# 11 Section Lowpass Filter With SMA Female Connectors Operating From DC to 11 GHz

# **TECHNICAL DATA SHEET**

# PE87FL1017

The PE87FL1017 is an Eleven section Low pass filter. The pass band is 11000 MHz wide, from 0 to 11 GHz with excellent rejection of 50 dB at 15 GHz to 18 GHz. It has a maximum insertion loss of 1.5 dB. The PE87FL1017 has SMA female connectors.

### Configuration

mgaradon	
Design	Low Pass Filter
Number of Sections	11
Connector 1	SMA Female
Connector 2	SMA Female
Passband Frequency Range	DC to 11 GHz

### **Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Passband Freq.	DC		11	GHz
Useable Freq. Range		DC to 11		GHz
Impedance		50		Ohms
Insertion Loss			1.5	dB
Passband VSWR			2:1	
Input Power			6	Watts
Rejection at 15 GHz	50			dB
Rejection at 18 GHz	50			dB

### **Mechanical Specifications**

Size Length Width Height Weight Connectors	0.44 in [1	0.48 mm] 3.97 mm] 1.18 mm] 5 [20.41 g]
Description	Connector 1	Connector 2
Туре	SMA Female	SMA Female

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 11 Section Lowpass Filter With SMA Female Connectors Operating From DC to 11 GHz PE87FL1017

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com





11 Section Lowpass Filter With SMA Female Connectors Operating From DC to 11 GHz

# **TECHNICAL DATA SHEET**

# PE87FL1017


PASTERNACK P/N PEBTEL1017 DC to 11000 MHz D.C 1547


#### Compliance Certifications (see product page for current document)

### **Plotted and Other Data**

Notes: • Values at +25 °C, sea level

### **Typical Performance Data**

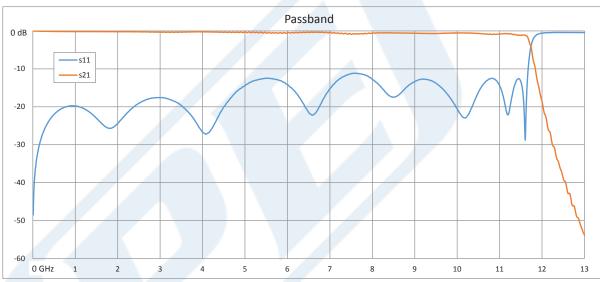

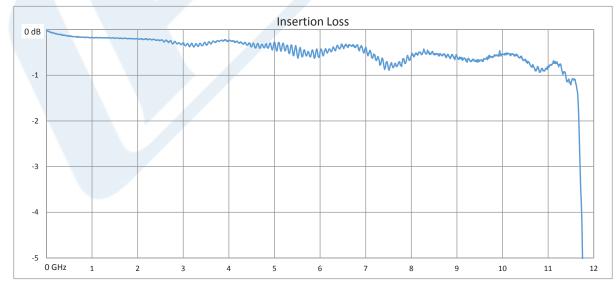

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 11 Section Lowpass Filter With SMA Female Connectors Operating From DC to 11 GHz PE87FL1017

ISO 9001 : 2008 Registered

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451 Sales@Pasternack.com • Techsupport@Pasternack.com

ester asternack.com · rechsupporter asternack.com






11 Section Lowpass Filter With SMA Female Connectors Operating From DC to 11 GHz

### **TECHNICAL DATA SHEET**

# PE87FL1017

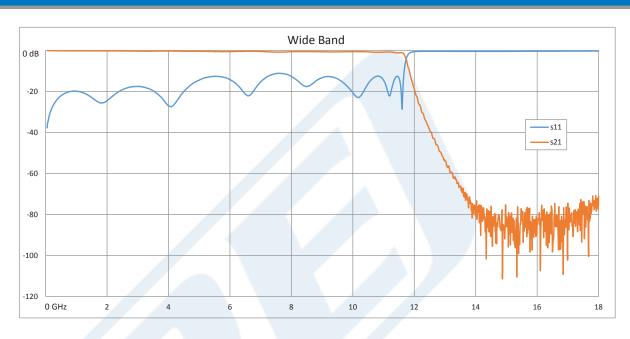

11 Section Lowpass Filter With SMA Female Connectors Operating From DC to 11 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 11 Section Lowpass Filter With SMA Female Connectors Operating From DC to 11 GHz PE87FL1017


URL: https://www.pasternack.com/11-section-low-pass-filter-dc-11-ghz-passband-11-ghz-pe87fl1017-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451 **Sales@Pasternack.com** • Techsupport@Pasternack.com

© 2017 Pasternack Enterprises All Rights Reserved







# PE87FL1017 CAD Drawing

11 Section Lowpass Filter With SMA Female Connectors Operating From DC to 11 GHz

