



SMA Male to SMA Male Radius Right Angle Adapter MIL-STD-202, Method 106 Gold Plated

RF Adapters Technical Data Sheet

PE91154

Configuration

- SMA Male Connector 1
- SMA Male Connector 2
- 50 Ohms
- Radius Right Angle Body Geometry

Features

- Max VSWR of 1.15:1 up to 18 GHz
- SMA Interface compliant with MIL-STD-348
- Gold Plated Beryllium Copper Contact
- Contact Plating per ASTM B-488

Applications

- General Purpose Test

Description

Pasternack's PE91154 SMA male to SMA male radius right angle adapter mil-std-202, method 106 is part of our full line of RF components available for same-day shipping. The SMA connector mates mechanically with commercially available 3.5mm and 2.92mm (K) connectors. Our SMA to SMA adapter has a male to male gender configuration built of durable stainless steel. PE91154 SMA male to SMA male adapter is gold plated and operates to 18 GHz. The Pasternack RF adapter provides excellent VSWR of 1.15:1 maximum. This low profile radius right angle SMA adapter allows for easier connections in tight spaces.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Pasternack also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.15:1	
Insertion Loss			0.34	dB
Operating Voltage (AC)			335	Vrms
Dielectric Withstanding Voltage (AC)			1,000	Vrms
High Potential Voltage (min. @ 5 MHz)			670	Vrms
Corona Discharge (@ 70,000 ft.)			250	Vrms
Inner Conductor DC Resistance			3	mOhms
Outer Conductor DC Resistance			2	mOhms
Insulation Resistance	5,000			MOhms
RF Leakage			72	dB

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Radius Right Angle Adapter MIL-STD-202, Method 106 Gold Plated PE91154](#)



SMA Male to SMA Male Radius Right Angle Adapter
MIL-STD-202, Method 106 Gold Plated

RF Adapters Technical Data Sheet

PE91154

Mechanical Specifications

Size

Width 0.312 in [7.92 mm]
Weight 0.06 lbs [27.22 g]

Description	Connector 1	Connector 2
Type	SMA Male	SMA Male
Polarity	Standard	Standard
Interface Specification	MIL-STD-348	MIL-STD-348
Mating Cycles	500	500
Hex Size	5/16 Inch	5/16 Inch
Mating Torque	8 in-lbs [0.90 Nm] max	8 in-lbs [0.90 Nm] max
Coupling Proof Torque, Min	15 in-lbs [1.7 Nm]	15 in-lbs [1.7 Nm]
Coupling Retention, Min	60 lbs [27.22 Kg]	60 lbs [27.22 Kg]

Material Specifications

Description	Connector 1		Connector 2	
	Material	Plating	Material	Plating
Type	SMA Male		SMA Male	
Contact	Beryllium Copper	Gold ASTM B-488	Beryllium Copper	Gold ASTM B-488
Insulation	PTFE Permeability: <2		PTFE Permeability: <2	
Body	Stainless Steel	Gold ASTM B-488	Stainless Steel	Gold ASTM B-488
Gasket	Silicone Rubber		Silicone Rubber	
Coupling Nut	Stainless Steel	ASTM A-967	Stainless Steel	Gold ASTM B-488

Environmental Specifications

Temperature

Operating Range -55 to +125 deg C

Humidity

MIL-STD-202, Method 106

Shock

MIL-STD-202, Method 213, Test Cond. I

Vibration

MIL-STD-202, Method 204, Test Cond. D.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Radius Right Angle Adapter MIL-STD-202, Method 106 Gold Plated PE91154](#)





SMA Male to SMA Male Radius Right Angle Adapter
MIL-STD-202, Method 106 Gold Plated

RF Adapters Technical Data Sheet

PE91154

Thermal Shock
Salt Spray

MIL-STD- 202, Method 107, Test Cond. B
MIL-STD-202, Method 101, Test Cond. B

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data




Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Radius Right Angle Adapter MIL-STD-202, Method 106 Gold Plated PE91154](#)



SMA Male to SMA Male Radius Right Angle Adapter
MIL-STD-202, Method 106 Gold Plated

RF Adapters Technical Data Sheet

PE91154

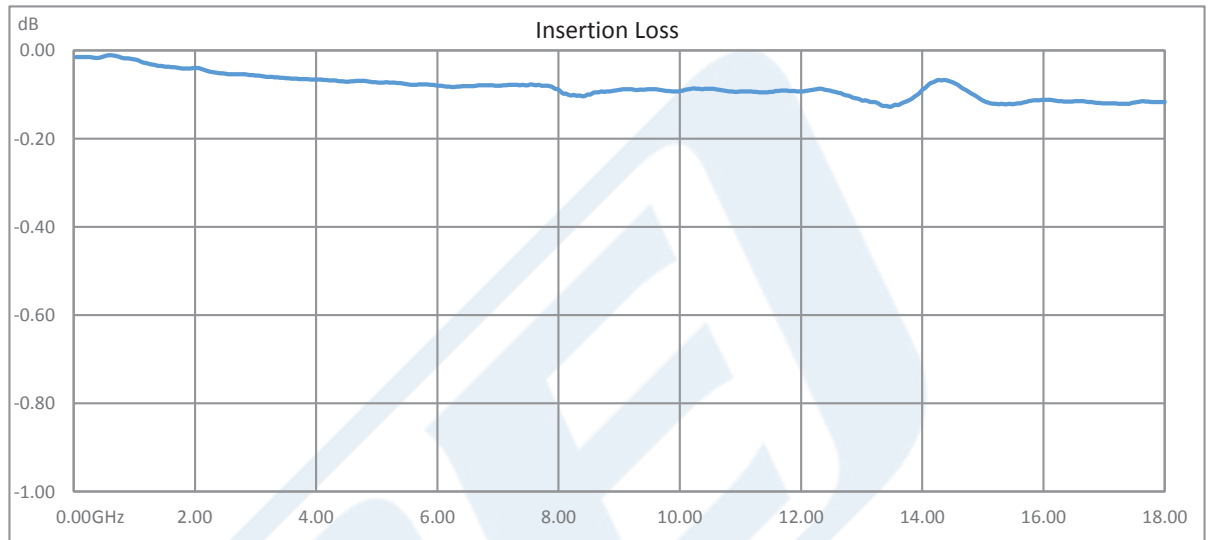

SMA Male to SMA Male Radius Right Angle Adapter MIL-STD-202, Method 106 Gold Plated from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Radius Right Angle Adapter MIL-STD-202, Method 106 Gold Plated PE91154](https://www.pasternack.com/sma-male-sma-male-radius-right-angle-adapter-pe91154-p.aspx)


URL: <https://www.pasternack.com/sma-male-sma-male-radius-right-angle-adapter-pe91154-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.



PE91154 CAD Drawing

SMA Male to SMA Male Radius Right Angle Adapter MIL-STD-202, Method 106 Gold Plated

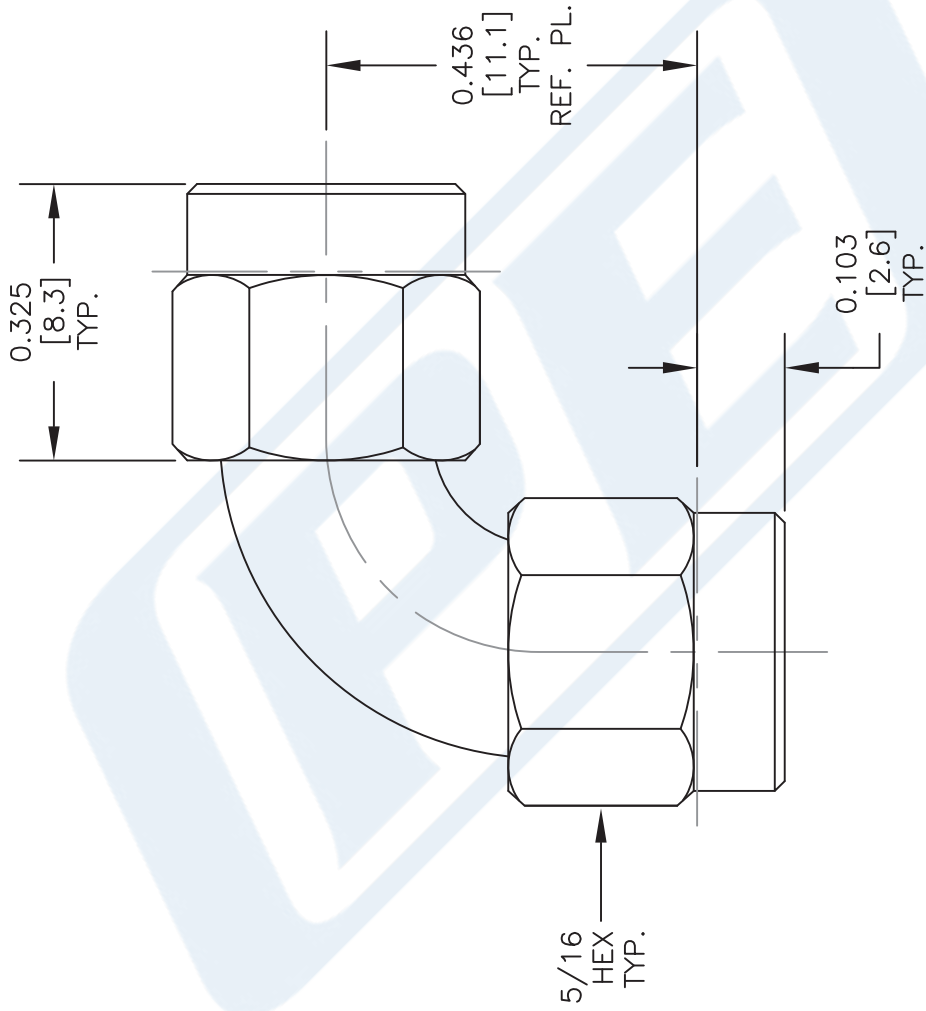

STANDARD TOLERANCES

.X ±0.2
.XX ±0.1
.XXX ±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES



Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE91154

FSCM NO. 53919

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES (mm).

CAD FILE 021814

SCALE N/A

SIZE A

2233