

TECHNICAL DATA SHEET

PE91240

Connector 1
Impedance 1
Connector 2
Impedance 2
Adapter Design
Body Style

TNC Male
50 Ohms
TNC Female
50 Ohms
Standard
Straight

Frequency Range
Maximum VSWR

DC to 6 GHz
1.3:1

Size
Length, in [mm]

1.323 [33.6]

Type
Inner Conductor Material and Plating
Coupling Nut Material and Plating
Body Material and Plating
Dielectric Type

TNC Male
Brass, Gold
Brass, Tri-Metal
Brass, Tri-Metal
PTFE

Type
Inner Conductor Material and Plating
Body Material and Plating
Dielectric Type

TNC Female
Brass, Gold
Brass, Tri-Metal
PTFE

Temperature

Operating Range

-40 to +120 deg C

Ingress Protection

IP67 UnMated

RoHS Compliant
REACH Compliant

06/16/2014

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com


ISO 9001 : 2008 Registered



PE91240

PE91240 CAD Drawing

TNC Male to TNC Female Adapter IP67 UnMated

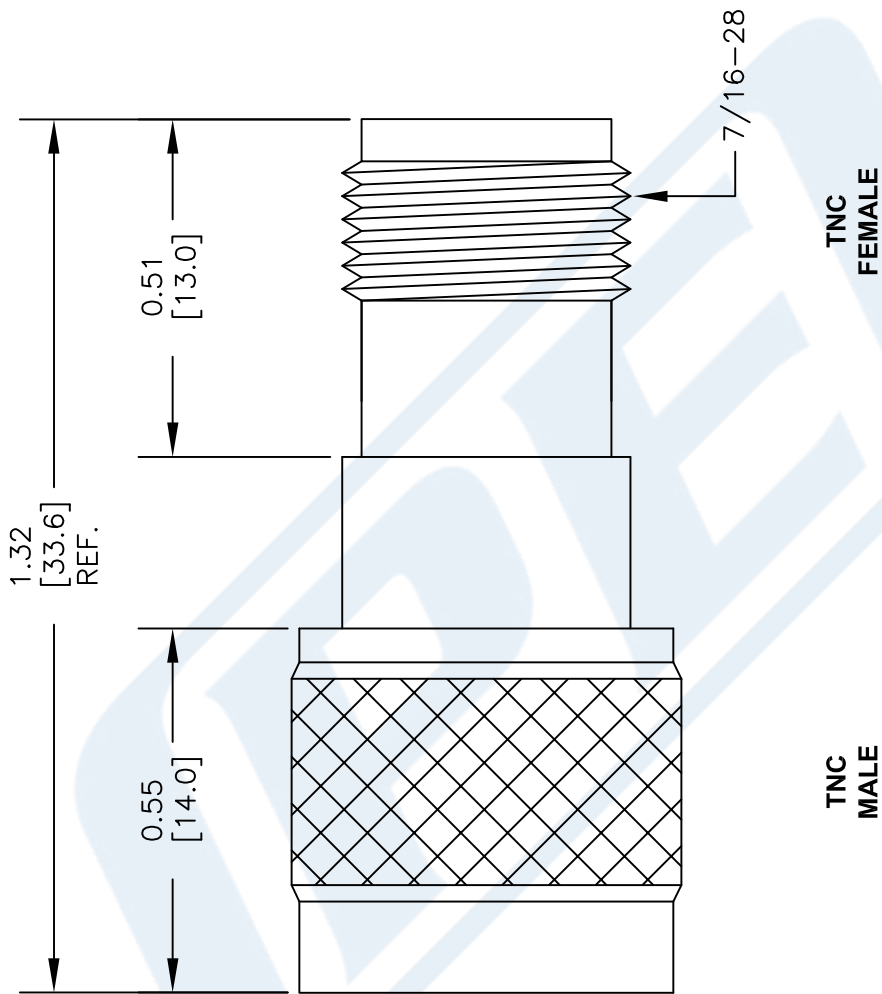

DWG TITLE

PE91240

FSCM NO. 53919

CAD FILE 060614

SCALE N/A

SIZE A

2233

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

PE PASTERNAK®
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com