



## **RF Adapters Technical Data Sheet**

PE9150

## Configuration

- BNC Male Connector 1
- F Female Connector 2

- 50 Ohms, 75 Ohms
- Straight Body Geometry

#### **Features**

Max VSWR of 1.5:1 up to 300 MHz

Gold Plated Brass Contact

### **Applications**

Allows Connection Between Series

General Purpose Test

#### Description

Pasternack's PE9150 50 ohm BNC male to 75 ohm type F female adapter is part of our full line of RF components available for same-day shipping. PE9150 BNC male to type F female adapter operates to 300 MHz. The Pasternack RF adapter provides good VSWR of 1.5:1 maximum.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Pasternack also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

#### **Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		300	MHz
VSWR		1.29:1	1.5:1	
Operating Voltage (AC)			500	Vrms
Dielectric Withstanding Voltage (AC)			1,500	Vrms

## **Mechanical Specifications**

Size

 Length
 1.213 in [30.81 mm]

 Width
 0.571 in [14.5 mm]

 Weight
 0.037 lbs [16.78 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 50 Ohm BNC Male to 75 Ohm F Female Adapter PE9150







# **RF Adapters Technical Data Sheet**

PE9150

Description	Connector 1	Connector 2
Туре	BNC Male	F Female
Polarity	Standard	Standard
Interface Specification	MIL-STD-348A	
Mating Cycles	500	500

### **Material Specifications**

	Connector 1		Con	nector 2
Description	Material	Plating	Material	Plating
Туре	BNC Male		F Female	
Contact	Brass	Gold	Brass	Gold
		30 μ-in minimum		
Insulation	PTFE		PTFE	
Outer Conductor			Brass	Nickel
				100 μ-in minimum
Body	Brass	Nickel		
		100 μ-in minimum		
Coupling Nut	Brass	Nickel		
		100 μ-in minimum		

## **Environmental Specifications**

**Temperature** 

Operating Range -40 to +60 deg C

Vibration MIL-STD-202, Method 204, Condition D

Compliance Certifications (see product page for current document)

**Plotted and Other Data** 

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 50 Ohm BNC Male to 75 Ohm F Female Adapter PE9150









# **RF Adapters Technical Data Sheet**

## **PE9150**

#### **Typical Performance Data**

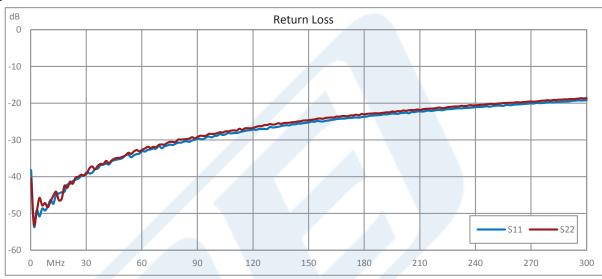

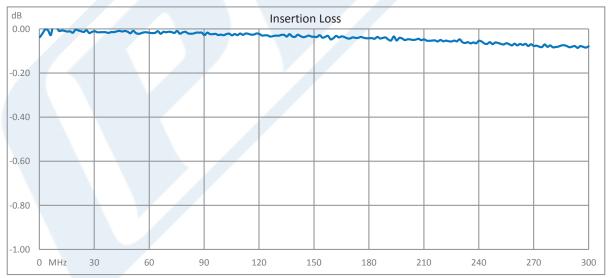

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 50 Ohm BNC Male to 75 Ohm F Female Adapter PE9150



© 2016 Pasternack Enterprises All Rights Reserved





## **RF Adapters Technical Data Sheet**

**PE9150** 

50 Ohm BNC Male to 75 Ohm F Female Adapter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 50 Ohm BNC Male to 75 Ohm F Female Adapter PE9150

URL: https://www.pasternack.com/f-female-bnc-male-straight-adapter-pe9150-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

**PE9150 CAD Drawing** 50 Ohm BNC Male to 75 Ohm F Female Adapter

