



50 Ohm UHF Male to 75 Ohm F Female Adapter

RF Adapters Technical Data Sheet

PE9165

Configuration

- UHF Male Connector 1
- F Female Connector 2
- 50 Ohms, 75 Ohms
- Straight Body Geometry

Features

- Gold Plated Brass Contact
- 30 µ-in min Gold Contact Plating

Applications

- Allows Connection Between Series
- General Purpose Test

Description

Pasternack's PE9165 50 ohm UHF male to 75 ohm type F female adapter is part of our full line of RF components available for same-day shipping.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Pasternack also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Mechanical Specifications

Size

Length	1.34 in [34.04 mm]
Width	0.7 in [17.78 mm]
Weight	0.045 lbs [20.41 g]

Description	Connector 1	Connector 2
Type	UHF Male	F Female
Polarity	Standard	Standard

Material Specifications

Description	Connector 1		Connector 2	
	Material	Plating	Material	Plating
Type	UHF Male		F Female	
Contact	Brass	Gold 30 µ-in minimum	Brass	Gold 30 µ-in minimum
Insulation	POM		POM	
Outer Conductor			Brass	Nickel 100 µ-in minimum

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm UHF Male to 75 Ohm F Female Adapter PE9165](#)



50 Ohm UHF Male to 75 Ohm F Female Adapter

RF Adapters Technical Data Sheet

PE9165

Body	Brass	Nickel 100 µ-in minimum
Coupling Nut	Brass	Nickel 100 µ-in minimum

Compliance Certifications (see [product page](#) for current document)


50 Ohm UHF Male to 75 Ohm F Female Adapter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm UHF Male to 75 Ohm F Female Adapter PE9165](#)

URL: <https://www.pasternack.com/uhf-male-f-female-straight-adapter-pe9165-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE9165 CAD Drawing
50 Ohm UHF Male to 75 Ohm F Female Adapter

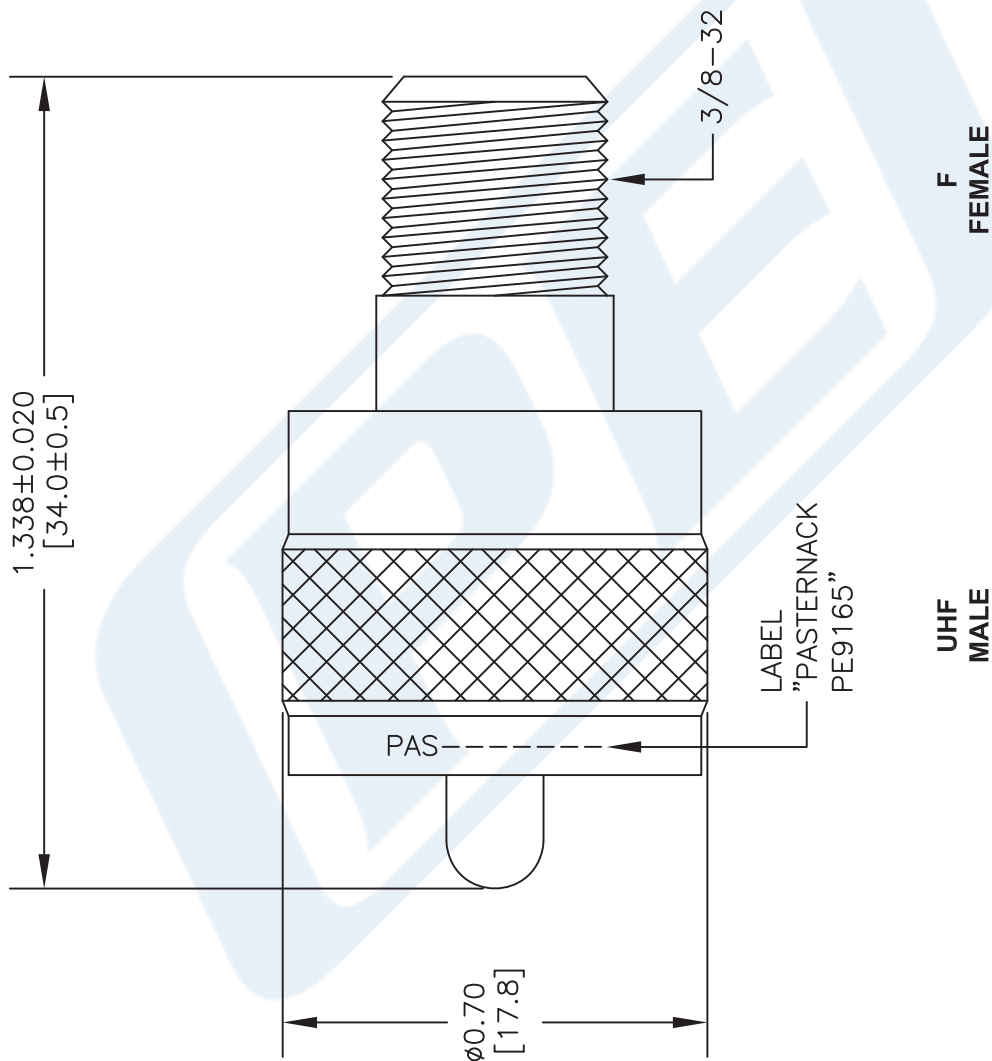

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.1
.XXX	±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

PE PASTERNAK® THE ENGINEER'S RF SOURCE Pasternack Enterprises, Inc. P.O. Box 16759 Irvine CA 92623 Phone: (949) 261-1920 Fax: (949) 261-7451 Website: www.pasternack.com E-Mail: sales@pasternack.com	DWG TITLE PE9165	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].
FSCM NO. 53919	CAD FILE 0222416	SCALE N/A
	SIZE A	3045