



## TNC Male to TNC Female Adapter

### RF Adapters Technical Data Sheet

PE9270

#### Configuration

- TNC Male Connector 1
- TNC Female Connector 2
- 50 Ohms
- Straight Body Geometry

#### Features

- Max VSWR of 1.5:1 up to 11 GHz
- TNC Interface compliant with MIL-STD-348A
- Gold Plated Brass Contact
- 30 µ-in min Gold Contact Plating

#### Applications

- Connector Saver
- General Purpose Test

#### Description

Pasternack's PE9270 TNC male to TNC female adapter is part of our full line of RF components available for same-day shipping. Our TNC to TNC adapter has a male to female gender configuration. PE9270 TNC male to TNC female adapter operates to 11 GHz. The Pasternack RF adapter provides good VSWR of 1.5:1 maximum. The PE9270 Pasternack RF adapter can also be used as a connector saver to extend equipment life.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Pasternack also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		11	GHz
VSWR			1.5:1	
Operating Voltage (AC)			500	Vrms

#### Mechanical Specifications

<b>Size</b>	
Length	1.469 in [37.31 mm]
Width	0.591 in [15.01 mm]
Weight	0.049 lbs [22.23 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to TNC Female Adapter PE9270](#)



## TNC Male to TNC Female Adapter

### RF Adapters Technical Data Sheet

PE9270

Description	Connector 1	Connector 2
Type	TNC Male	TNC Female
Polarity	Standard	Standard
Interface Specification	MIL-STD-348A	MIL-STD-348A

#### Material Specifications

Description	Connector 1		Connector 2	
	Material	Plating	Material	Plating
Type	TNC Male		TNC Female	
Contact	Brass	Gold 30 µ-in minimum	Brass	Gold 30 µ-in minimum
Insulation	PTFE		PTFE	
Outer Conductor			Brass	Nickel 100 µ-in minimum
Body	Brass	Nickel 100 µ-in minimum		
Gasket	Silicone			
Coupling Nut	Brass	Nickel 100 µ-in minimum		

#### Environmental Specifications

##### Temperature

Operating Range

-65 to +165 deg C

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to TNC Female Adapter PE9270](#)



## TNC Male to TNC Female Adapter

### RF Adapters Technical Data Sheet

PE9270


TNC Male to TNC Female Adapter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to TNC Female Adapter PE9270](#)

URL: <https://www.pasternack.com/tnc-female-tnc-male-straight-adapter-pe9270-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

**PE9270 CAD Drawing**  
TNC Male to TNC Female Adapter

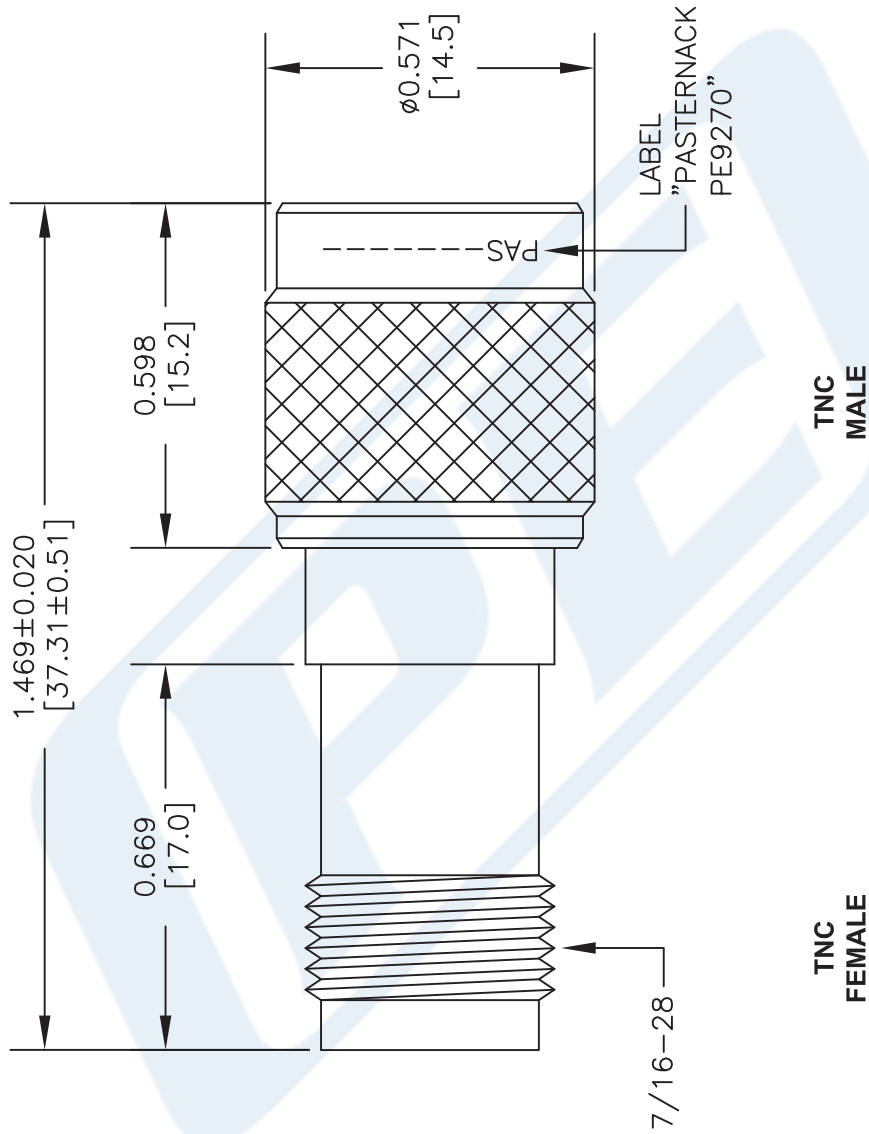

**STANDARD TOLERANCES**

.X ±0.2  
.XX ±0.1  
.XXX ±0.05

\*STANDARD TOLERANCES APPLY  
ONLY TO DIMENSIONS IN INCHES



Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

DWG TITLE

**PE9270**

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 021116

SCALE N/A

SIZE A

3045