



## SMA Female to TNC Male Adapter

### RF Adapters Technical Data Sheet

PE9440

#### Configuration

- SMA Female Connector 1
- TNC Male Connector 2
- 50 Ohms
- Straight Body Geometry

#### Features

- Max VSWR of 1.25:1 up to 18 GHz
- SMA interface compliant with MIL-C-39012
- TNC interface compliant with MIL-C-39012
- Gold Plated Beryllium Copper Contact

#### Applications

- Allows Connection Between Series
- General Purpose Test

#### Description

Pasternack's PE9440 SMA female to TNC male adapter is part of our full line of RF components available for same-day shipping. The SMA connector mates mechanically with commercially available 3.5mm and 2.92mm (K) connectors. Our SMA to TNC adapter has a female to male gender configuration. PE9440 SMA female to TNC male adapter operates to 18 GHz. The Pasternack RF adapter provides excellent VSWR of 1.25:1 maximum.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Pasternack also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

#### Electrical Specifications

| Description     | Minimum | Typical | Maximum | Units |
|-----------------|---------|---------|---------|-------|
| Frequency Range | DC      |         | 18      | GHz   |
| VSWR            |         |         | 1.25:1  |       |

#### Mechanical Specifications

|        |                     |
|--------|---------------------|
| Size   |                     |
| Length | 1.52 in [38.61 mm]  |
| Width  | 0.625 in [15.88 mm] |
| Weight | 0.077 lbs [34.93 g] |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female to TNC Male Adapter PE9440](#)



## SMA Female to TNC Male Adapter

### RF Adapters Technical Data Sheet

PE9440

| Description             | Connector 1 | Connector 2 |
|-------------------------|-------------|-------------|
| Type                    | SMA Female  | TNC Male    |
| Polarity                | Standard    | Standard    |
| Interface Specification | MIL-C-39012 | MIL-C-39012 |
| Hex Size                |             | 5/8 in      |

Mechanical Specification Notes:  
TNC connector is mode free up to 18 GHz.

#### Material Specifications

| Description     | Connector 1                |         | Connector 2      |         |
|-----------------|----------------------------|---------|------------------|---------|
|                 | Material                   | Plating | Material         | Plating |
| Type            | SMA Female                 |         | TNC Male         |         |
| Contact         | Beryllium Copper           | Gold    | Beryllium Copper | Gold    |
| Outer Conductor | Passivated Stainless Steel |         |                  |         |
| Body            | Passivated Stainless Steel |         |                  |         |
| Coupling Nut    | Passivated Stainless Steel |         |                  |         |

#### Environmental Specifications

##### Temperature

Operating Range -65 to +125 deg C

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female to TNC Male Adapter PE9440](#)




## SMA Female to TNC Male Adapter

### RF Adapters Technical Data Sheet

PE9440

#### Typical Performance Data

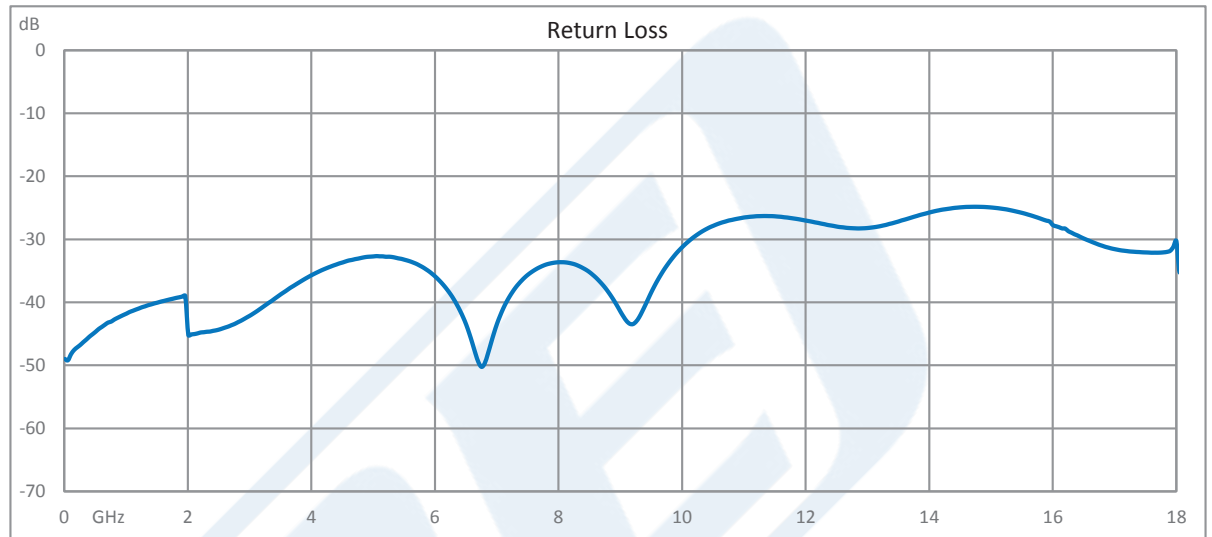


SMA Female to TNC Male Adapter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female to TNC Male Adapter PE9440](#)

URL: <https://www.pasternack.com/sma-female-tnc-male-straight-adapter-pe9440-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE9440 CAD Drawing  
SMA Female to TNC Male Adapter

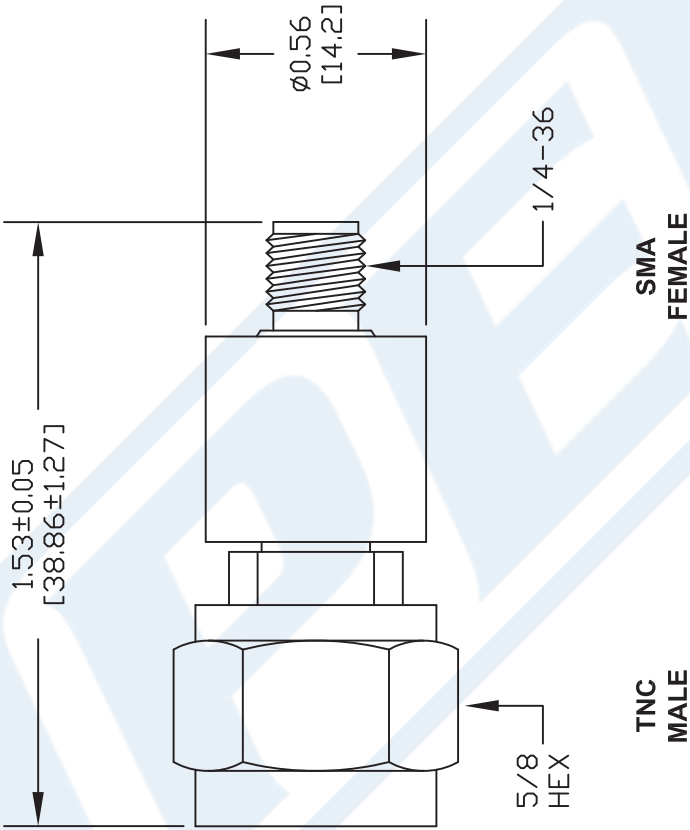

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

|           |          |       |          |        |
|-----------|----------|-------|----------|--------|
| DWG TITLE | PE9440   |       |          |        |
|           | FSCM NO. | 53919 | CAD FILE | 011316 |
|           | SCALE    | N/A   | SIZE     | A      |
|           |          |       |          | 150    |

**PASTERNAK**  
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)