

PASILIFE KACK PASILIFE KACK PESSEY NR. 50 PESSEY NR. 50 82-12 40-14

WR-90 Square Type Flange to N Male Waveguide to Coax Adapter Operating From 8.2 GHz to 12.4 GHz, X Band

Waveguide to Coax Adapters Technical Data Sheet

PE9889

Features

- X Band, 8.2 to 12.4 GHz Frequency Range
- WR-90 Waveguide Interface with Square Type Flange
- N Male Coaxial Interface

 Comprehensive waveguide offerings also include E-Bends, H-Bends, Sections, Filters, Terminations, Couplers, and more.

Description

The PE9889 is a waveguide to coaxial adapter operating in the X band with a 8.2 to 12.4 GHz frequency range. This adapter offers a WR-90 waveguide interface size coupled with a precision tolerance square Type flange. The PE9889 is constructed of aluminum to ensure durability and repeatable RF performance. The coaxial connector offered by this adapter uses a N type male connector and the package is REACH and RoHS compliant.

Configuration

Waveguide Size Flange RF Connector Impedance Body Geometry WR-90 Square Type N Male 50 Ohms Right Angle

Electrical Specifications

8.2		12.4	GHz
		1.3:1	
	8.2	8.2	· · · · · · · · · · · · · · · · · · ·

Mechanical Specifications

Size

 Length
 2.66 in [67.56 mm]

 Width
 1.63 in [41.4 mm]

 Height
 1 in [25.4 mm]

 Weight
 0.196 lbs [88.9 g]

RF Connector

Connector Type N Male
Body Material and Plating Stainless Steel

Waveguide Interface

Waveguide Type WR-90
Flange Type Square Type
Body Material and Plating Aluminum

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-90 Square Type Flange to N Male Waveguide to Coax Adapter Operating From 8.2 GHz to 12.4 GHz, X Band PE9889

ISO 9001 : 2008 Registered





WR-90 Square Type Flange to N Male Waveguide to Coax Adapter Operating From 8.2 GHz to 12.4 GHz, X Band

Waveguide to Coax Adapters Technical Data Sheet

PE9889


Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

• Values at +25 °C, sea level unless stated otherwise

Typical Performance Data

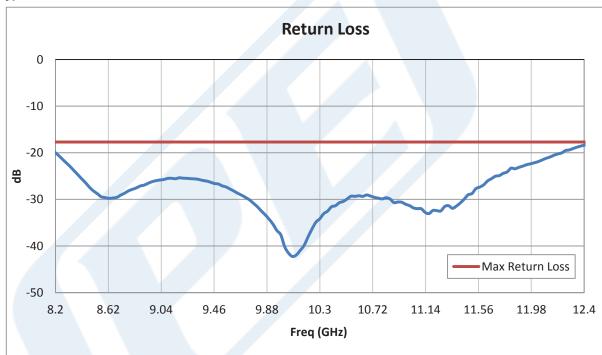

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-90 Square Type Flange to N Male Waveguide to Coax Adapter Operating From 8.2 GHz to 12.4 GHz, X Band PE9889





PAST LACK PASTINATION NO. 90 82-12 4 CPH

WR-90 Square Type Flange to N Male Waveguide to Coax Adapter Operating From 8.2 GHz to 12.4 GHz, X Band

Waveguide to Coax Adapters Technical Data Sheet

PE9889

WR-90 Square Type Flange to N Male Waveguide to Coax Adapter Operating From 8.2 GHz to 12.4 GHz, X Band from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-90 Square Type Flange to N Male Waveguide to Coax Adapter Operating From 8.2 GHz to 12.4 GHz, X Band PE9889

URL: https://www.pasternack.com/wr-90-square-cover-n-waveguide-coax-adapter-12.4-ghz-pe9889-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

ISO 9001 : 2008 Registered

PE9889 CAD Drawing

WR-90 Square Type Flange to N Male Waveguide to Coax Adapter Operating From 8.2 GHz to 12.4 GHz, X Band

