

WR-90 UG-39/U Square Cover Flange to SMA Female Waveguide to Coax Adapter Operating From 8.2 GHz to 12.4 GHz, X Band

perating From 8.2 GHz to 12.4 GHz, X Band

Waveguide to Coax Adapters Technical Data Sheet

de Provincial de

PEWCA1006

Features X Band 8.2 to 12.4 GHz Frequency Range WR-90 Waveguide Interface Applications Test Benches Radar Satellite Microwave Radio Systems Standard UG-39/U Square Cover Flange SMA Female RF Interface Military and Space Communication Systems

Description

The PEWCA1006 is a waveguide to coaxial adapter operating in the X Band with a 8.2 to 12.4 GHz frequency range. This adapter offers a WR-90 waveguide interface size using a standard UG-39/U Square Cover Flange. The PEWCA1006 is constructed of Copper Alloy and painted to ensure durability. The coaxial connector offered by this adapter uses a SMA Female Nickel Plated Brass Connector.

Configuration

Waveguide Size Flange RF Connector Impedance Body Geometry WR-90 UG-39/U Square Cover SMA Female 50 Ohms Right Angle

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	8.2		12.4	GHz
VSWR		1.25:1		

Mechanical Specifications

Weight

RF Connector

Connector Type Body Material and Plating

Waveguide Interface

Waveguide Type Flange Type Flange Designation Body Material and Plating 0.269 lbs [122.02 g]

SMA Female Brass, Nickel

WR-90 Square Cover UG-39/U Copper Alloy, Paint

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-90 UG-39/U Square Cover Flange to SMA Female Waveguide to Coax Adapter Operating From 8.2 GHz to 12.4 GHz, X Band PEWCA1006

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com







WR-90 UG-39/U Square Cover Flange to SMA Female Waveguide to Coax Adapter Operating From 8.2 GHz to 12.4 GHz, X Band


Waveguide to Coax Adapters Technical Data Sheet

Compliance Certifications (see product page for current document)

Plotted and Other Data Notes:

• Values at +25 °C, sea level unless stated otherwise

Typical Performance Data

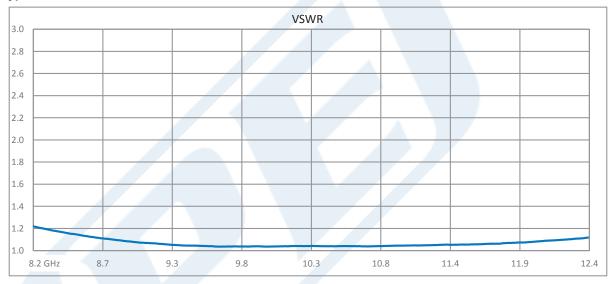

WR-90 UG-39/U Square Cover Flange to SMA Female Waveguide to Coax Adapter Operating From 8.2 GHz to 12.4 GHz, X Band from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-90 UG-39/U Square Cover Flange to SMA Female Waveguide to Coax Adapter Operating From 8.2 GHz to 12.4 GHz, X Band PEWCA1006

URL: https://www.pasternack.com/wr-90-ug39-square-sma-female-waveguide-coax-adapter-12.4-ghz-pewca1006-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451 Sales@Pasternack.com • Techsupport@Pasternack.com

© 2017 Pasternack Enterprises All Rights Reserved





PEWCA1006

PEWCA1006 CAD Drawing

WR-90 UG-39/U Square Cover Flange to SMA Female Waveguide to Coax Adapter Operating From 8.2 GHz to 12.4 GHz, X Band

