



TECHNICAL DATA SHEET

PEWCP1025

The PEWCP1025 is a WR-112 Directional Broadwall waveguide coupler that operates in the frequency range of 7.05 to 10 GHz. This Waveguide component has a typical VSWR of 1.05:1. These designs are made of painted copper alloy and incorporate a broad wall configuration that result in a mid-band nominal coupling value of 10, 20, or 30 dB. Common applications for this component would be where power measurements are required within a system for measuring/sampling power or frequency monitoring with minimal signal loss to the main transmission line. Pasternack offers a complete family of waveguide Crossguide and Broadwall couplers that are in-stock and ship same day.

Features

- Broadwall Waveguide Coupler
- 30 dB Nominal Coupling Level
- 7.05 GHz to 10 GHz Frequency Range

Electrical Specifications (Values at 25°C, sea level)

Body and Flanges made of Copper Alloy

Source Leveling

Low VSWR

Applications

- Test Benches
- Radar

- Microwave Radio
- Attenuation Measurements
- Satellite
 Power Measurements

Description	Minimum	Typical	Maximum	Units
Frequency Range	7.05		10	GHz
Directivity		40		dB
Insertion Loss		0.15		dB
Main Line VSWR		1.05:1		
Nominal Coupling Level		30		dB

Mechanical Specifications

Size

 Length
 18.62 in [472.95 mm]

 Height
 3.997 in [101.52 mm]

 Weight
 3.12 lbs [1.42 Kg]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-112 30 dB Directional Waveguide Broadwall Coupler, UG-51/U Square Cover Flange, E-Plane Coupled Port, 7.05 GHz to 10 GHz PEWCP1025

ISO 9001 : 2008 Registered





TECHNICAL DATA SHEET

PEWCP1025

Configuration

Design Directional E-Plane Broadwall Size WR-112

Description	Input Flange	Output Flange	Coupled Flange(s)
Flange Type	Square Cover	Square Cover	Square Cover
Flange Designation	UG-51/U	UG-51/U	UG-51/U
Material	Copper Alloy	Copper Alloy	Copper Alloy
Plating	Silver	Silver	Silver

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant REACH Compliant

12/17/2015

Plotted and Other Data

Notes:

Values at 25 °C, sea level

Typical Performance Data



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-112 30 dB Directional Waveguide Broadwall Coupler, UG-51/U Square Cover Flange, E-Plane Coupled Port, 7.05 GHz to 10 GHz PEWCP1025








TECHNICAL DATA SHEET

PEWCP1025

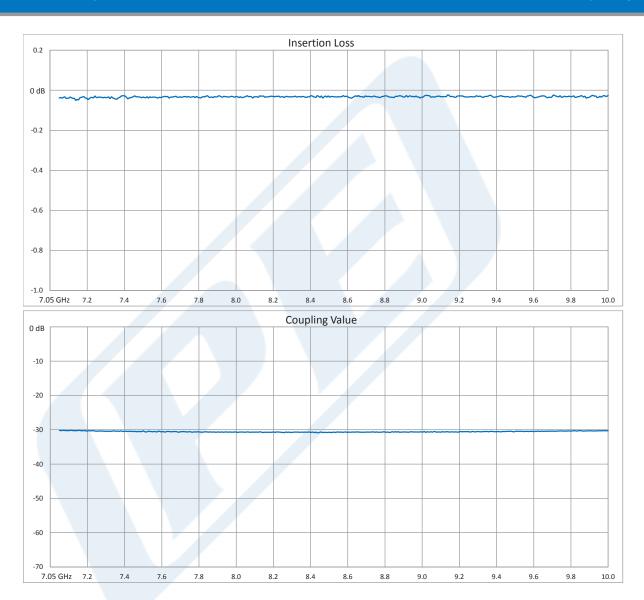

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-112 30 dB Directional Waveguide Broadwall Coupler, UG-51/U Square Cover Flange, E-Plane Coupled Port, 7.05 GHz to 10 GHz PEWCP1025




© 2016 Pasternack Enterprises All Rights Reserved





TECHNICAL DATA SHEET

PEWCP1025

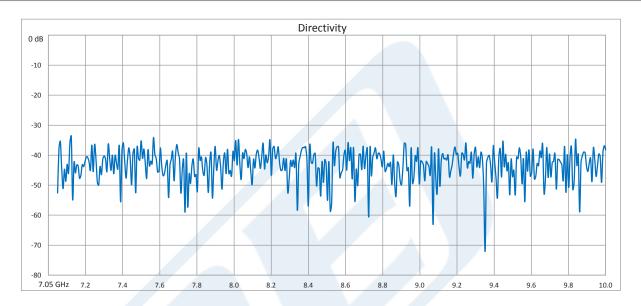

WR-112 30 dB Directional Waveguide Broadwall Coupler, UG-51/U Square Cover Flange, E-Plane Coupled Port, 7.05 GHz to 10 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-112 30 dB Directional Waveguide Broadwall Coupler, UG-51/U Square Cover Flange, E-Plane Coupled Port, 7.05 GHz to 10 GHz PEWCP1025

URL: http://www.pasternack.com/wr-112-30-db-directional-waveguide-broadwall-coupler-ug51-square-e-pewcp1025-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.



PEWCP1025 CAD Drawing

WR-112 30 dB Directional Waveguide Broadwall Coupler, UG-51/U Square Cover Flange, E-Plane Coupled Port, 7.05 GHz to 10 GHz

